



OFFICE OF ENVIRONMENT, HEALTH AND SAFETY
UNIVERSITY HALL, 3rd FLOOR

BERKELEY, CALIFORNIA 94720-1150

April 12, 2017

Lynn Nakashima
Project Manager
Department of Toxic Substances Control
700 Heinz Avenue
Berkeley, CA 94710

**Subject: University of California, Berkeley, Richmond Field Station Site
Final Soil Management Plan, Revision 1
Removal Action Workplan, Attachment C
Site Investigation and Remediation Order I/SE-RAO 07/07-004, Section 5.16**

Dear Ms. Nakashima:

Please find enclosed the Final Soil Management Plan, Revision 1, Removal Action Workplan, Attachment C, dated April 12, 2017. Two hard copies are provided; electronic copies were submitted via email. The soil management plan (SMP) has been updated based on technical updates and clarifications established during the implementation of the SMP since its inception in July 2014. Substantive updates to the document consist of the following:

- The Introduction incorporates current nomenclature and status of Berkeley Global Campus at Richmond Bay (formerly called the Richmond Bay Campus at the time of approval in July 2014).
- Screening values for total petroleum hydrocarbon (TPH) have been updated to reference the San Francisco Bay California Regional Water Quality Control Board Environmental Screening Values.
- Screening values for aluminum, cobalt, manganese, and nickel have been updated based on the Final Ambient Metals Technical Memorandum, dated December 11, 2015.
- The Sampling section has been updated to clarify that for temporary projects, soil samples do not need to be collected from beneath the proposed impacted soil.
- The Implementation of Soil Management Actions section has been updated to clarify that for projects which qualify as *de minimis*, UC Berkeley EH&S will evaluate if placement of cinders within shallow excavations need to be removed for off-site disposal or whether they can be left in place in a manner that is protective of possible future exposure.
- A map and table showing historical radiological use, sampling locations, and references summary.
- All figures were revised to include updated storm and sewer line locations based on recent UC Berkeley assessments.

Minor editorial and non-substantive changes were incorporated into text to improve readability.

Ms. Lynn Nakashima
April 12, 2017
Page 2

A hard copy has been delivered to the City of Richmond Public Library and the document is also available for public review at Building 478, Berkeley Global Campus.

If you have any questions or need further information regarding this submittal, please call me at (ghaet@berkeley.edu, 510-642-4848) or Karl Hans (khans@berkeley.edu, 510-643-9574).

Sincerely,



Greg Haet, P.E.
EH&S Associate Director
Environmental Protection
Enclosure

cc: Bill Marsh, Edgcomb Law Group

Final

Soil Management Plan, Revision 1

Removal Action Workplan, Attachment C

**Berkeley Global Campus at Richmond Bay, Richmond,
California**

**Research, Education, and Support Area within the Former
Richmond Field Station**

Prepared for:

University of California, Berkeley


April 12, 2017

Prepared by



TETRA TECH, INC.

1999 Harrison Street, Suite 500
Oakland, California 94612



Jason Brodersen, P.G., No 6262



CONTENTS

ACRONYMS AND ABBREVIATIONS	C-iv
EXECUTIVE SUMMARY	C-ES-1
1.0 INTRODUCTION AND PURPOSE	C-1
1.1 SCOPE	C-3
1.2 APPROACH	C-4
1.3 DOCUMENTATION AND SMP UPDATES	C-8
1.4 COMMUNITY NOTIFICATION PROCESS	C-9
1.5 ROLES AND RESPONSIBILITIES	C-9
1.6 SMP CONTENT	C-10
2.0 BACKGROUND	C-12
2.1 CURRENT AND HISTORICAL ACTIVITIES	C-12
2.1.1 Current Land Use	C-12
2.1.2 Historic Uses	C-13
2.2 PREVIOUS INVESTIGATIONS AND REMEDIATION	C-14
2.2.1 Pre-FSW Investigations	C-14
2.2.2 FSW Investigations	C-14
2.2.3 Previous Cleanup Actions	C-14
2.3 CHEMICALS OF CONCERN	C-15
2.4 SOIL MANAGEMENT PLAN AREAS	C-18
3.0 PROJECT DESCRIPTION AND DETERMINATION OF SAMPLING	C-19
3.1 TYPES OF WORK	C-19
3.2 POTENTIAL IMPACTS TO GROUNDWATER PIEZOMETER NETWORK	C-20
3.3 SAMPLING REQUIREMENTS	C-21
3.4 DOCUMENTATION	C-21
4.0 SAMPLING, DATA EVALUATION, AND SOIL MANAGEMENT ACTIONS	C-23
4.1 PRESCRIPTIVE SAMPLING DESIGN	C-23
4.2 DATA EVALUATION	C-26
4.2.1 Screening Criteria	C-26
4.2.2 Determination of Soil Management Action	C-27
4.3 SOIL MANAGEMENT ACTIONS	C-28
4.3.1 On-Site Management Plan	C-28
4.3.2 Soil Excavation Plan	C-29
4.4 DOCUMENTATION	C-30

CONTENTS (Continued)

5.0	IMPLEMENTATION OF SOIL MANAGEMENT ACTIONS.....	C-33
5.1	PRE-EXCAVATION ACTIVITIES.....	C-33
5.1.1	Permitting and Notification.....	C-33
5.1.2	Health and Safety.....	C-33
5.1.3	Storm Water Pollution Prevention Plan Compliance.....	C-34
5.1.4	Utility Clearance.....	C-34
5.1.5	Ground Clearance and Grubbing.....	C-34
5.1.6	Groundwater Level Measurement.....	C-34
5.1.7	Piezometer Abandonment and Replacement.....	C-35
5.1.8	Hazardous Material Abatement.....	C-35
5.1.9	Implementation of Grassland Protection Measures.....	C-35
5.1.10	Implementation of Archeological Resource Protection Measures.....	C-35
5.2	EXCAVATION ACTIVITIES.....	C-36
5.2.1	Excavation.....	C-36
5.2.2	Confirmation Sampling.....	C-36
5.2.3	Cinder Management.....	C-37
5.2.4	Erosion, Dust Control, and Air Monitoring.....	C-39
5.2.5	Decontamination.....	C-41
5.2.6	Waste Handling and Storage.....	C-41
5.3	POST-EXCAVATION ACTIVITIES.....	C-42
5.3.1	Waste Classification, Transportation, and Disposal.....	C-43
5.3.2	Site Restoration.....	C-44
6.0	COMPLETION REPORTING.....	C-46
7.0	REFERENCES.....	C-48

CONTENTS (Continued)

Figures

- C-1 Berkeley Global Campus at Richmond Bay
- C-2 University of California Properties
- C-3 Research, Education, and Support Areas and Natural Open Space within Site Boundary
- C-4 Physical Features
- C-5 Soil Management Plan Areas
- C-6 Historic Radiological Use and Sampling Locations
- C-7 Soil Management Plan Areas, Sampling Densities, and Recommended Analytes

Tables

- C-1 Category I and II Criteria
- C-2 Summary of SMP Areas and Historical Activities
- C-3 Recommended Soil Sampling Density and Analysis for Sampling Design
- C-4 Historic Radiological Use and Sampling Locations, Reference List

Exhibits

- C1 Soil Management Plan Forms A, B, C
- C2 Sampling and Analysis Plan

Attachments

- C1 DTSC Comments and Response to Comments
- C2 Imported Soils Sampling and Analysis Requirements to Assess Contaminant Concentrations

ACRONYMS AND ABBREVIATIONS

AST	Above ground storage tank
BAP(EQ)	Benzo(a)pyrene equivalent
BGC	Berkeley Global Campus at Richmond Bay
Bgs	Below ground surface
Cal/EPA	California Environmental Protection Agency
CCC	California Cap Company
CCR	Current Conditions Report
CFR	Code of Federal Regulations
COC	Chemical of concern
CY	Cubic yard
DTSC	Department of Toxic Substances Control
EH&S	Office of Environment, Health & Safety
EPA	U.S. Environmental Protection Agency
FPL WTL	Forest Products Laboratory Wood Treatment Lab
FSW	Field Sampling Workplan
GIS	Geographic information system
HMX	Octahydor-1,3,5,7-tetranitro-1,3,5,7-tetrazocine
HSP	Health and Safety Plan
IDW	Investigation-derived waste
LBNL	Ernest Orlando Lawrence Berkeley National Laboratory
LBP	Lead-based paint
LRDP	Long Range Development Plan
LUC	Land use control
MCL	Maximum contaminant level
MFA	Mercury Fulminate Area
mg/kg	Milligrams per kilogram
NOI	Notice of Intent
NOS	Land use designation identified in the LRDP as Natural Open Space, which applies to areas that UC plans to protect from development and maintain in their natural condition
PAH	Polycyclic aromatic hydrocarbons
PCB	Polychlorinated biphenyl
PPE	Personal protective equipment

ACRONYMS AND ABBREVIATIONS (Continued)

QSD	Qualified SWPPP Developer
QSP	Qualified SWPPP Preparer
RAW	Removal Action Workplan
RBC	Risk-based concentration
RES	Land use designation identified in the LRDP as Research, Education, and Support, which applies to areas that are either currently developed with facilities that would remain in their present form or be expanded, or that would be developed with new facilities
RFS	Richmond Field Station
RFS Site Investigation and Remediation Order	DTSC Site Investigation and Remediation Order. Docket No. IS/E-RAO 06/07-004 for the former RFS Site
RWQCB	San Francisco Bay Regional Water Quality Control Board
SAP	Sampling and analysis plan
SCR	Site Characterization Report
SMP	Soil Management Plan
SOP	Standard operating procedure
SVOC	Semivolatile organic compounds
SWPPP	Stormwater pollution prevention plan
TCE	Trichloroethene
TCRA	Time-critical removal action
TPH	Total petroleum hydrocarbons
TSCA	Toxic Substance Control Act
UC	University of California
UCL	Upper confidence limit
URS	URS Corporation
UST	Underground storage tank
VOC	Volatile organic compound
Zeneca Order	DTSC Site Investigation and Remediation Order. Docket No. IS/E-RAO 06/07-005 for the former Zeneca Site

EXECUTIVE SUMMARY

The Soil Management Plan (SMP) supports the implementation of land use controls established in the Removal Action Workplan (RAW) for the Former Richmond Field Station (RFS), located at the Berkeley Global Campus at Richmond Bay (BGC), in Richmond, California (Figure C-1). Revision 1 is the first of the as needed SMP updates; it incorporates changes to SMP protocols and updated screening criteria since the original SMP was published in July 2014.

The BGC is a new major research facility approved by The Regents of the University of California (UC) in May 2014 composed of portions of the Former RFS and the Regatta Property located west of the Former RFS. The facility was originally named Richmond Bay Campus; its name was changed to BGC in October 2014. The BGC will provide for development of additional facilities for UC Berkeley and the Ernest Orlando Lawrence Berkeley National Laboratory (LBNL) for academic teaching, applied research, and collaborations with private industry focused on energy, environment, and health.

UC Berkeley has been conducting investigation and cleanup actions at the Former RFS under the oversight of the California Environmental Protection Agency (Cal/EPA), Department of Toxic Substances Control (DTSC), in compliance with the Site Investigation and Remediation Order, Docket No. IS/E-RAO 06/07-004, dated September 15, 2006 (RFS Site Investigation and Remediation Order). The RFS Site Investigation and Remediation Order provides for the investigation and cleanup of 96 acres of upland and 13 acres of tidal marsh and transition habitat within the Former RFS. In July 2014, UC Berkeley published the RAW and SMP under Health and Safety Code Section 25356.1(h)(1) and in compliance with the RFS Site Investigation and Remediation Order.

The SMP provides a framework to prohibit uncontrolled soil excavation or disturbance activities which may expose workers or visitors to unsafe exposures to environmental contaminants. The objective of the SMP is to ensure that soil disturbance activities do not adversely impact human health or the environment and that the soils are handled, stored and disposed of, or reused onsite in accordance with applicable laws, regulations, and UC policies. The SMP ensures that soils disturbed during future construction, redevelopment, or maintenance projects will be sampled and managed to ensure that no uncontrolled exposures to, or releases of contaminants occur within the areas of the Former RFS planned for Research, Education, and Support (RES) land uses.

SMP Revision 1 supersedes the original version of the SMP and should be used in its place, per the changes identified in its transmittal letter. This final version addresses comments received from DTSC dated December 14, 2016 on the Draft SMP Revision 1, dated September 27, 2016, as documented in Attachment C1, DTSC Comments and Response to Comments.

The SMP will be reviewed annually or more frequently if necessary, and an updated version of the SMP will be published if warranted due to significant content changes.

1.0 INTRODUCTION AND PURPOSE

The Soil Management Plan (SMP) supports the implementation of land use controls established in the Removal Action Workplan (RAW) for the Former Richmond Field Station (RFS), located at the Berkeley Global Campus at Richmond Bay (BGC), in Richmond, California (Figure C-1). Revision 1 is the first SMP update; it incorporates changes to SMP protocols and updated screening criteria since the original SMP was published in July 2014.

On May 15, 2014, The Regents of the University of California (UC) approved the BGC as a new major research facility on properties it owns in Richmond, California. The BGC is composed of portions of the Former RFS and the Regatta Property located west of the Former RFS. The BGC will provide for development of additional facilities for UC Berkeley and the Ernest Orlando Lawrence Berkeley National Laboratory (LBNL) for academic teaching, applied research, and collaborations with private industry focused on energy, environment, and health. The facility was originally named Richmond Bay Campus; its name was changed to BGC in October 2014. The Long Range Development Plan (LRDP) for the property (UC 2014) identifies two land use designations to form the pattern of development at the BGC: (1) Research, Education, and Support (RES) and (2) Natural Open Space (NOS). The RES land use applies to areas that are either currently developed with facilities that would remain in their present form or be expanded, or that would be developed with new facilities (UC 2014). The NOS land use applies to areas that UC plans to protect from development and maintain in their natural condition. The location of the BGC and areas identified as RES and NOS land uses are shown on Figure C-1.

UC Berkeley has been conducting investigation and cleanup actions at the Former RFS under the oversight of the California Environmental Protection Agency (Cal/EPA), Department of Toxic Substances Control (DTSC), in compliance with the Site Investigation and Remediation Order, Docket No. IS/E-RAO 06/07-004, dated September 15, 2006 (RFS Site Investigation and Remediation Order). The RFS Site Investigation and Remediation Order provides for the investigation and cleanup of 96 acres of upland and 13 acres of tidal marsh and transition habitat within the Former RFS. In July 2014, UC Berkeley prepared a RAW and an accompanying SMP under Health and Safety Code Section 25356.1(h)(1) and in compliance with the RFS Site Investigation and Remediation Order. For the purposes of this RAW, the property defined under the RFS Site Investigation and Remediation Order is referred to as the “Former RFS Site” or “Site.” The Former RFS Site does not encompass the entire RFS; two outboard parcels are not included in the RFS Site Investigation and Remediation Order. The Regatta Property portion of the BGC is not included in the RFS Site Investigation and Remediation Order or Former RFS Site; and therefore is not subject to the SMP. Figure C-2 shows the Former RFS Site in relation to the BGC, Regatta Property, and outboard parcels.

The RAW establishes the remedial goals and final remedy for the RES and groundwater at the portions of BGC within the Former RFS Site. The remainder of the Former RFS site consisting of areas designated for NOS is not addressed by the RAW. Continued investigation within the NOS of the Former RFS Site will continue under the RFS Site Investigation and Remediation Order. The Former RFS Site, including the RES and NOS, is shown on Figure C-3.

The RAW identifies specific actions to be conducted within the RES at the Former RFS Site as follows:

Soil Remedy

- Excavation of polychlorinated biphenyl (PCB)-impacted soils at the Building 112 and Building 150 Transformer Areas and three areas within the Corporation Yard with total PCB concentrations exceeding the remedial goal (1 milligram per kilogram [mg/kg]).
- Excavation of mercury-impacted soil at the Mercury Fulminate Area (MFA) with concentrations exceeding the remedial goal (275 mg/kg).
- Excavation of benzo(a)pyrene equivalent (BAP[EQ])-impacted soil with concentrations exceeding the remedial goal (0.4 mg/kg) and dioxin-impacted soil with concentrations greater than the remedial goal (1.6.4E-05 mg/kg) at the Corporation Yard.
- Management of cinders encountered during soil excavations.
- Implementation of site-wide land use controls (LUC) consisting of deed restrictions identifying the future use of the Site as commercial only, and mandating that future site soil disturbance or soil movement be conducted under the SMP.
- Implementation of the SMP which provides a framework for excavation and soil management, in conjunction with redevelopment or construction projects for chemicals in soil exceeding Criteria I or II levels within the RES.

Groundwater Remedy

- Monitoring natural attenuation of groundwater with carbon tetrachloride concentrations exceeding the remedial goal (2.63 micrograms per liter) at the western edge of the Coastal Terrace Prairie.
- Continuing groundwater monitoring at the Former RFS Site.
- Treatment and monitoring of contaminants in groundwater originating from the former Zeneca Site, including trichloroethene (TCE) and its breakdown components, under the DTSC Site Investigation and Remediation Order for the former Zeneca Site (IS/E-RAO 06/07-005) (Zeneca Order).
- Implementation of site-wide LUCs consisting of deed restrictions prohibiting groundwater extraction for purposes other than groundwater monitoring/treatment or construction dewatering.

This SMP supports the implementation of LUCs by providing a framework to prohibit uncontrolled soil excavation or disturbance activities which may expose workers or visitors to unsafe exposures to environmental contaminants. The objective of this SMP is to ensure that soil disturbance activities do not adversely impact human health or the environment and that the soils are handled, stored and disposed of, or reused onsite in accordance with applicable laws, regulations, and UC policies. The SMP ensures that soils disturbed during future construction, redevelopment, or maintenance projects will be sampled and managed to ensure that no uncontrolled exposures to, or releases of contaminants within the RES occur ([Figure C-1](#)). This SMP has been effective since July 18, 2014, when the final RAW was published.

Revision 1 supersedes the original version of the SMP and should be used in its place.

The SMP will be reviewed annually or more frequently if necessary, and an updated version of the SMP will be published if warranted due to significant content changes.

1.1 SCOPE

All activities conducted in the RES of the Former RFS Site impacting surface cover conditions, surface soil, or subsurface soil are subject to the direct oversight of UC Office of Environment, Health & Safety (EH&S), and are subject to all state and federal soil disposal requirements.

EH&S provides the following services for UC activities at the BGC:


- Emergency Response – the EH&S Dedicated Spill Response Team is trained and equipped to address the majority of chemical spills and releases on campus. Team members serve as the liaison to the Richmond Fire Department Hazardous Materials Team and obtain specialized assistance from outside responders as necessary.
- Environmental Protection – programs include acutely hazardous materials management program, campus resources for environmental protection, construction coordination, construction resources, drain disposal restrictions (water quality), environmental management systems, groundwater quality, outdoor air quality, spare the air, surface water quality, and wastewater quality.
- Hazardous Materials – programs include biohazardous waste management, chemical exchange program, compressed gas cylinders, controlled substances disposal, hazardous material management resources, hazardous materials shipping, hazardous waste program, PCBs, and potentially explosive chemicals.
- Health & Safety – programs include asbestos safety, biosafety program, chemical hygiene plan, chemical inventory program, confined space, controlled substances used in research, dedicated spill response team, department safety coordinator program, field safety, hazard communication, hearing conservation, indoor air quality, industrial equipment, industrial safety, injury and illness prevention program, job safety analysis library, material safety data sheets, respiratory protection, sanitation program, standard operating procedures (SOP), toxic gas program, and training (all EH&S). The Health & Safety program includes oversight and approval of any subsurface soil disturbance activities, including utility clearance and cinder management, if present.
- Radiation Safety – programs include radiation safety forms and additional resources, radiation safety training, radiation surveys, radiation use authorization, and radioactive waste management.

In addition to conforming to the EH&S programs above, projects impacting greater than or equal to 10 cubic yards (CY) of in situ soil, or any projects resulting in a new hardscape surface of greater than 500 square feet, are subject to this SMP, which presents an evaluation of sampling requirements, reporting, and DTSC notification. Soil disturbance activities impacting less than 10 CY of in situ soil or less than 500 square feet of hardscape surface are not subject to the requirements of the SMP; however, they will be managed directly by EH&S through its existing

programs listed above. If any condition arises that may pose an imminent or substantial endangerment to public health or safety or the environment, DTSC will be notified and a determination will be made whether the SMP is applicable or some other action needs to be taken.

The provisions of the SMP consist of three primary components: (1) project description and determination of sampling; (2) sampling, data evaluation, and soil management action; and (3) completion reporting. Implementation of the SMP will be conducted on a site-specific basis, following the DTSC notification and reviews presented in the SMP. The SMP also provides prescriptive approaches for implementing each component without seeking DTSC-approval for each step; however, DTSC notification requirements will still be met.

An overview of soil management activities is presented below.

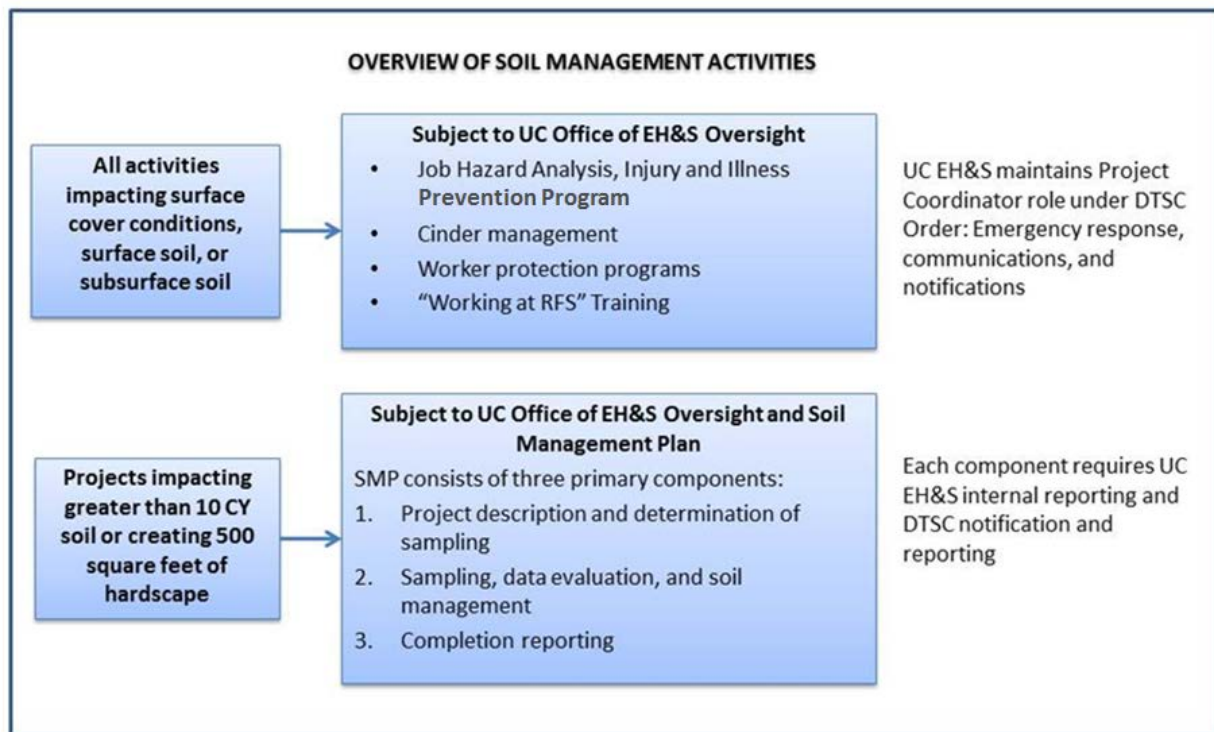

1.2 APPROACH

The SMP provides a systematic process intended to ensure that future projects impacting surface and subsurface soils will not result in uncontrolled exposures to or releases of contaminants. This SMP outlines the process required for safe management of soil activities with specific document submittals to DTSC. The SMP also allows for self-implementation of soil sampling and management actions, coupled with DTSC notification, provided UC follows the prescribed protocols outlined in Sections 3.0 through 6.0 of this SMP. The prescribed protocols are not intended as sampling requirements for all projects; instead, they serve as a starting point for sampling protocols and analyses. UC may elect to select alternative methods for soil sampling and management for any project, in which case UC will request and receive approval from DTSC.

This SMP outlines protocols to be followed for soil sampling, data analyses, soil management actions or disposal practices; and final reporting. EH&S will notify DTSC through the submittal of SMP checklist forms. Soil sampling will be based on site-specific strategies, or may follow the prescribed sampling density, depths, and chemicals of concern (COC), which are determined based on the proposed footprint and location of the project. Soil management actions and disposal requirements are based on comparison of soil sample results to screening criteria described herein and various waste acceptance criteria, and final reporting is conducted through preparation of a completion report that will also be provided to DTSC once the project has been completed. Soil may be disposed of at permitted landfills following federal and state hazardous waste laws and regulations, and would be subject to review by DTSC's enforcement program.

The three primary components of the SMP and an overview of the process are presented below and on the SMP Decision Framework diagram on the following page.


1. Project Description and Determination of Sampling. The first component of the SMP process is the determination by EH&S if the project is subject to the SMP requirements. Projects subject to SMP requirements are any construction, redevelopment, renovation, subsurface or utility repairs, grading, landscaping activities impacting at least 10 CY of soil, or any resulting in a hardscape cover more than 500 square feet.

Projects impacting soils less than 10 CY or 500 square feet of hardscape surface are considered *de minimis* projects and will not be subject to SMP requirements; these impacted soil volumes are expected to result in less than one small roll-off bin of soil. The intent of *de minimis* projects is to not expend unnecessary sampling and administrative costs for small projects already under the oversight of UC EH&S as described in Section 1.1. Examples of *de minimis* projects are presented in Section 3.1.

For projects subject to the SMP requirements, EH&S will provide a project description and determination of sampling by submitting *SMP Form A, Project Overview* ([Exhibit C1](#)) to DTSC prior to initiation of the project. EH&S may complete SMP Form A for *de minimis* projects or use other forms of documentation to ensure proper administrative recordkeeping as well as documenting the rationale for the *de minimis* determination.

2. Sampling Design, Data Evaluation, and Soil Management Actions. The SMP provides sampling protocols for projects requiring sampling in the previous step. Sampling protocols consist of the number of sampling locations per defined area (density), sampling intervals (depths), and analytical requirements. The protocols are based on the size of the proposed soil disturbance (horizontal and vertical); COCs are based on the history of the area (former operations or previous sampling data). Sampling protocols may follow the prescriptive protocols presented, or be conducted on a site-specific basis. The SMP requires submittal of the sampling strategy to DTSC prior to sampling.

SMP Decision Framework

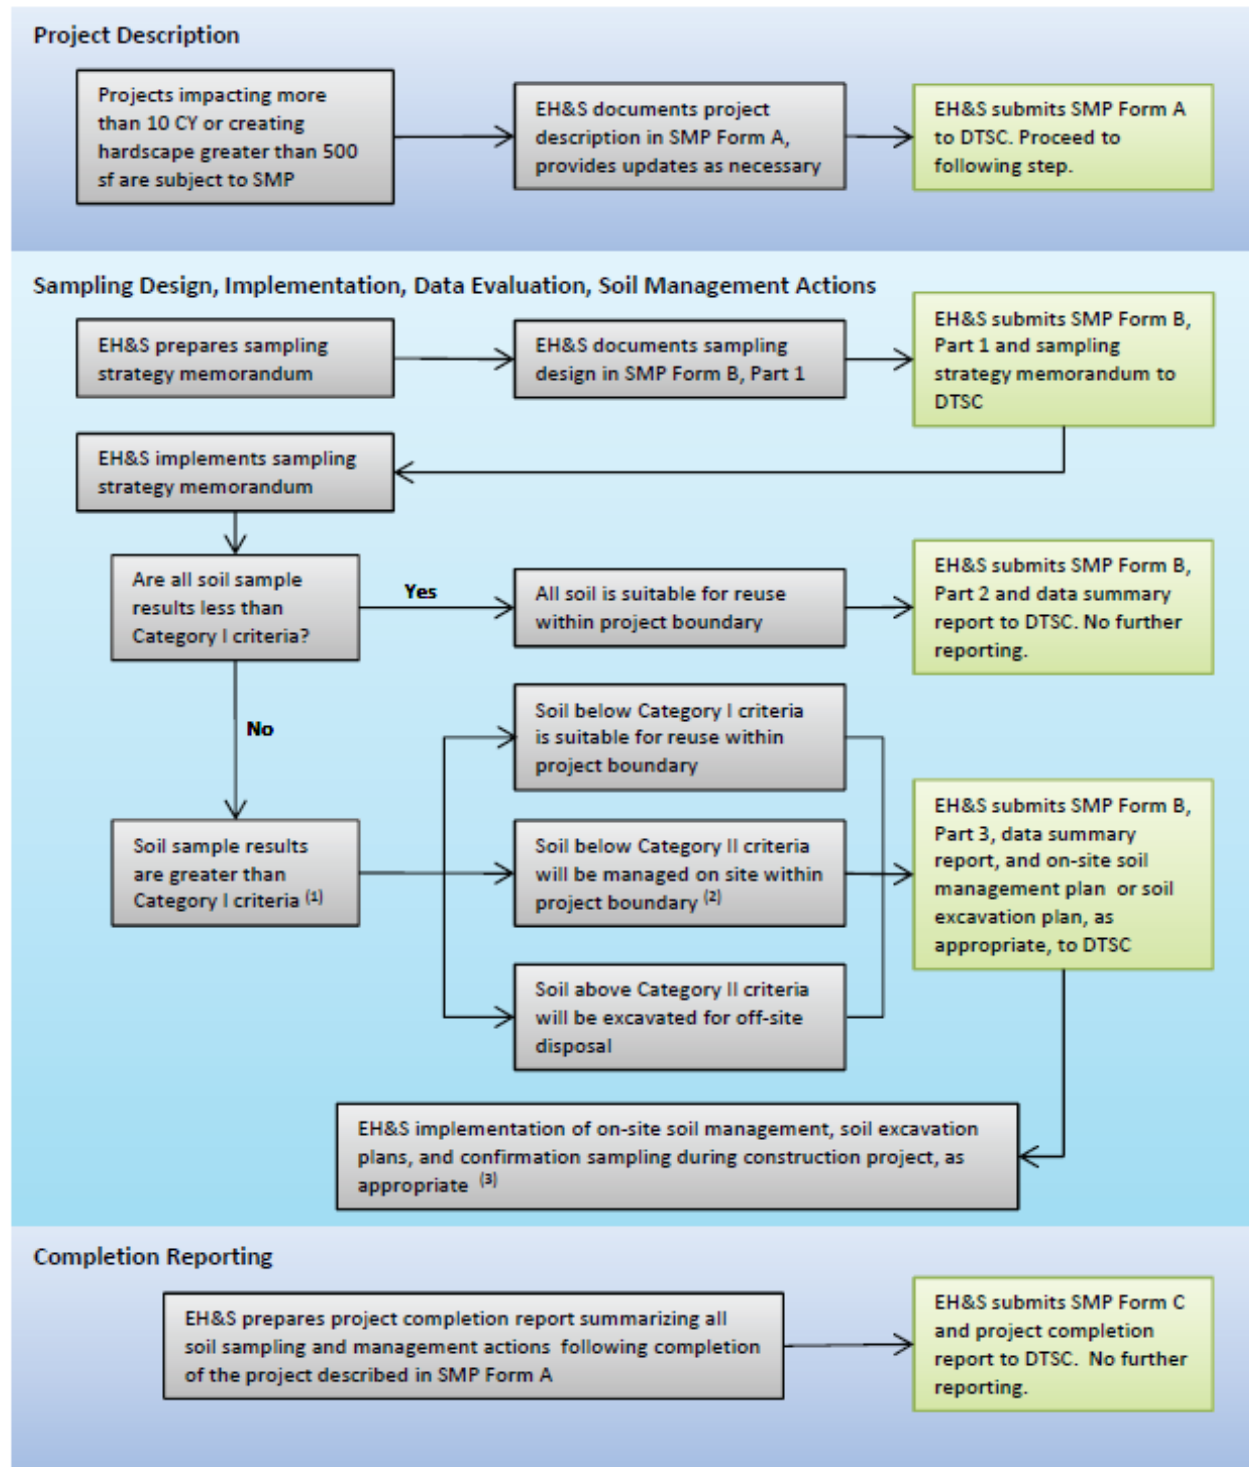

Notes

- Any soil may be moved off-site for reuse or disposal at an appropriate waste facility at any point within the process, with prior notification to DTSC.
- Managed on site consists of being covered with 2 feet of soil with concentrations below Category I criteria; being used as fill beneath hardscaped surfaces such as roadways, parking areas, or building structures; or any placement eliminating the direct exposure pathway to potential receptors.
- Confirmation sampling or any additional characterization sampling may be conducted throughout the project duration.

Analytical data will be compared to numerical screening criteria presented in the SMP (Table C-1). Soil with chemical concentrations less than Category I criteria is suitable for reuse within the project area described in SMP Form A. Soil with chemical concentrations below Category II criteria may be managed on site within the SMP project area – management on site consists of being covered with 2 feet of soil having concentrations less than the Category I criteria, or used as fill beneath hardscaped surfaces such as roadways, parking areas, or building structures, thereby eliminating the direct exposure pathway to potential receptors. EH&S will request DTSC concurrence for any proposed deviations from the prescriptive soil management protocols. Soil will remain within the SMP project area, unless UC requests project-specific approval from DTSC to use the soil in another location at the BGC.

Category I and II screening criteria include conditions protective of commercial workers, maintenance workers, construction workers, on-site visitors, and off-site receptors; Category I screening criteria are based on the lowest of the calculated risk-based concentrations (RBC), unless background, ambient, or Toxic Substance Control Act (TSCA) criteria are available, in which case the alternate values are selected. Category I criteria for TPH constituents are based on the San Francisco Bay Regional Water Quality Control Board (RWQCB) ESL. Category II criteria are based on 10 times the Category I criteria, with exceptions noted on Table C-1.

For each SMP project, site-specific conditions will be considered when selecting a remedial goal for a cleanup action. Category I or II screening criteria may be selected as remedial goals for a cleanup action within an SMP project area. However, a different remedial goal may be selected based on the appropriate receptors. The SMP is intended to protect all current and future receptors, however, for example, if the SMP project is known to not consist of a utility corridor, then the maintenance worker need not be considered if it is more stringent than the RBCs for the other receptors.

Soil with chemical concentrations exceeding Category II criteria will be considered for off-site disposal, or may be managed on site with DTSC approval. UC will prepare internal documentation of soil management actions, including an on-site management plan or an excavation plan if appropriate. If soil cannot be managed according to the prescribed requirements specified in this SMP, for example if there are significant building constraints or limitations, UC will request approval of an alternative soil management approach from DTSC.

Notification to DTSC and documentation of this information is provided in *SMP Form B, Sampling, Data Evaluation, and Soil Management Action* (Exhibit C1). SMP Form B will be submitted to DTSC at three stages: (1) prior to sampling, with a sampling strategy memorandum as an attachment; (2) following sampling, with a data summary report as an attachment; and (3) prior to implementation of a soil management action, if required.

If soils have concentrations less than Category I criteria, SMP activities and documentation will be considered complete following submission of SMP Form B with the data summary report.

For projects involving soil with concentrations greater than Category I, additional soil management actions such as on-site management or excavation will be required; in this case SMP Form B will be submitted to DTSC prior to implementation of a soil excavation or on-site management plan (and will include the soil excavation or on-site management plan as an attachment).

4. Completion Reporting. For projects where soil management actions are required, UC will prepare a report summarizing the sampling design, data results and evaluation, soil management actions, and final site conditions following project completion.

Notification to DTSC and documentation of this information will be provided in *SMP Form C, Completion Reporting (Exhibit C1)*, which will include the completion report as an attachment. SMP Form C and the completion report will be provided following completion of all construction activities to ensure documentation of final soil management.

1.3 DOCUMENTATION AND SMP UPDATES

Compliance with SMP requirements will be documented through EH&S submitting SMP Forms A, B, and C and associated documentation to DTSC. DTSC may require changes to sampling plans based on their review of the SMP Forms. Documentation requirements are as follows:

- Initial notification of projects subject to the SMP consists of EH&S submitting SMP Form A to DTSC, along with a project map. Projects not recommended for sampling will conclude with DTSC concurrence with SMP Form A. Examples include projects with sufficient existing sampling information, or projects being conducted entirely within clean fill.
- If sampling is required, EH&S will submit SMP Form B, Part 1 to DTSC, along with a sampling strategy memorandum describing the sampling strategy.
- Following sampling, EH&S will submit SMP Form B, Part 2 to DTSC. Documentation for projects with soils having concentrations less than Category I criteria will conclude with EH&S submitting SMP Form B and an attached data summary report to DTSC. For projects with soils having concentrations greater than Category I criteria, EH&S will submit SMP Form B, an attached data summary report, and a recommendation to conduct remedial action.
- For projects with soils having concentrations greater than Category I criteria, EH&S will submit SMP Form B, Part 3 to DTSC, along with either a soil excavation plan or on-site management plan, depending on the soil management strategy selected.
- Following completion of the soil management action, documentation for an SMP project will conclude with EH&S submitting SMP Form C and a completion report to DTSC.

UC will maintain records of all completed SMP Forms A, B, and C, in addition to required attachments supporting the sampling design, data evaluation, and soil management decisions. Copies of the records will be available to the public and will be maintained in the administrative office at Building 478 and EH&S offices.

UC will conduct annual reviews, or more frequently if necessary, of the SMP to evaluate screening criteria, protocols, and sampling requirements to ensure they continue to meet the intended purpose of the SMP. Suggested improvements or changes to the SMP will be proposed to DTSC for review and approval, and documented formally as a part of the 5-year review process of the RAW, or more frequently if justified. Copies of completed SMP Forms A, B, and C will also be included as a part of the 5-year review of the RAW.

1.4 COMMUNITY NOTIFICATION PROCESS

Community members will be notified of SMP activities similar to current notification practices. EH&S will use following methods of communication:

- Regularly scheduled town hall meetings for staff and tenants at BGC
- Posting of SMP Forms A, B, and C and required documentation on the RFS environmental website (<http://www.rfs-env.berkeley.edu/index.html>, or equivalent address) prior to soil disturbance
- Routine email communications to staff at BGC
- Hard copies of primary documents, and SMP Forms A, B, and C and required documentation will be available for review at a desk in the lobby of Building 478
- DTSC work notices
- Posting of SMP Forms A, B, and C and required documentation to DTSC’s Envirostor database

In addition, a spreadsheet tracking all SMP projects will be available to the public via the RFS environmental website.

Notification practices will be reviewed on an annual basis and modified if deemed necessary.

1.5 ROLES AND RESPONSIBILITIES

The roles and responsibilities for implementing the SMP are provided below.

Name and Affiliation	Role	Responsibility
UC, EH&S	Project Coordinator	Directs environmental health and safety compliance of the SMP. Receives notices, comments, approvals, and related communications from DTSC. Reports to and interacts with the DTSC for all SMP tasks. Signatory to SMP Forms A, B, C.
UC, EH&S	Project Geologist	Reviews all technical documents for technical accuracy and adherence with California laws and regulations. Signatory to SMP Form A.
UC, EH&S	Project Civil Engineer	Reviews all design and management plans for technical accuracy and adherence with California laws and regulations. Signatory to SMP Form A (if Project Geologist does not sign).

Name and Affiliation	Role	Responsibility
DTSC	Remedial Project Manager	Reviews environmental health and safety compliance of the SMP. Signatory to 5-year RAW review process including updated SMP, if appropriate. Receives notices, comments, and related communications from UC. Interacts with UC for all SMP tasks. Reviews all submittals and notifications to DTSC for quality and completeness.

1.6 SMP CONTENT

This SMP is organized consistent with the three primary elements discussed in the approach above. SMP text, tables, and figures provide the required background information and technical information necessary to identify the sampling protocols, data evaluation, soil management action, and completion reporting. The exhibits provide supporting information and reference materials for the implementation of the SMP. A summary of the SMP content is presented below.

- Section 1.0 – Introduction and Purpose. Presents an overview of SMP purpose, scope, approach, protocols for soil management notifications and SMP document updates, roles and responsibilities, and SMP content.
- Section 2.0 – Background. Presents the current and historical land use activities, previous sampling and remedial activities, and summary of COCs. Introduces the geographic delineation of SMP Areas to assist with the review of background information and determination of sampling design.
- Section 3.0 – Project Description and Determination of Sampling. Describes projects subject to the SMP, including small projects which may not require sampling to large projects which will implement the prescriptive sampling requirements of the SMP, or will require consultation with DTSC. Includes description of the information to be presented in SMP Form A.
- Section 4.0 – Sampling, Data Evaluation, and Soil Management Actions. Provides specific protocols to implement the SMP sampling requirements. Provides the sampling frequency and recommended analytes based on previous sampling results and background of the applicable SMP Areas, as referenced in Section 2.0. Identifies the sampling density and sampling depths based on the horizontal and vertical extent of the planned soil disturbance activities. Provides Category I and II criteria for the characterization of soil, and resulting soil management action options. Identifies internal documentation requirements as well as a description of the information to be presented in SMP Form B.
- Section 5.0 – Implementation of Soil Management Actions. Presents protocols and management practices that will be implemented during the soil management actions.
- Section 6.0 – Completion Reporting. Presents a description of the reporting requirements necessary for the completion report and a description of the information to be presented in SMP Form C.
- Section 7.0 – References. Lists sources referenced within the SMP.

The SMP also includes two exhibits essential to the implementation of the SMP:

- [Exhibit C1](#): SMP Forms A, B and C provides templates for documentation of notification requirements and EH&S approval of SMP activities.
- [Exhibit C2](#): The Sampling and Analysis Plan (SAP) provides sampling protocols, policies, and procedures for implementing the sampling conducted under the SMP.

2.0 BACKGROUND

This section presents the current and historical land use activities, previous sampling and remedial activities, and summary of COCs in the RES. It introduces the geographic delineation of SMP Areas to assist with the review of background information and proposed sampling design criteria.

The summary of known conditions provided in this section is intended to provide an overview only. Specific information about historical sources, remediation activities, nature and extent of known contamination, and fate and transport of contaminants are available in the following reference documents:

- Final RAW (Tetra Tech 2014)
- Final Site Characterization Report (SCR) (Tetra Tech 2013)
- Final Current Conditions Report (CCR) (Tetra Tech 2008a)

2.1 CURRENT AND HISTORICAL ACTIVITIES

This section discusses the history of the Former RFS and provides an overview of current and historical land use and features. Current physical features, including buildings, are shown on [Figure C-4](#). The historical potential source areas from former industrial operations are shown on [Figure C-5](#). Further details, as well as historical aerial photographs, are in the CCR (Tetra Tech 2008a).

The RES has been subject to numerous land alterations through its history of development, including creation of ditches and culverts to channel storm drainage; placement of fill in the upland areas; and construction of buildings and utilities.

2.1.1 Current Land Use

The Former RFS is an academic teaching and research facility for UC Berkeley that has been used primarily for large-scale engineering research since 1950. Teaching and research facilities are available for public health investigations, civil engineering, mechanical engineering, transportation, fine arts, ergonomics, and occupational and environmental health. With more than 500,000 assignable square feet of research space, the Former RFS accommodates a range of space-intensive activities—including the UC Berkeley Northern Regional Library Facility, the Pacific Earthquake Engineering Research Center Earthquake Shaking Table Laboratory (one of the world's largest earthquake simulator multidirectional shaking tables), the Geosciences Well Field, sophisticated test facilities for advanced transportation research, and a robotics laboratory. The Former RFS also provides for a variety of smaller-scale engineering research projects not conducted on the central UC Berkeley campus. No sources of contamination have been identified as a result of research activities, with the exception of the Former Forest Product Laboratory Wood Treatment Laboratory (FPL WTL), for which a time-critical removal action (TCRA) was conducted and the small area of total petroleum hydrocarbon (TPH)-affected soil associated with leaks from the Earthquake Engineering hydraulic lines at Building 484. The UC Regents also lease space to non-UC Berkeley tenants. Current tenants include the U.S. Environmental Protection Agency (EPA) Region 9 Laboratory; Center for Occupation and

Environmental Health; Ergomek LLC; The Watershed Project; Marine Advanced Research; Cybertran; New Sun Road; and The Earth Team. In 1989, UC management estimated that 250 to 300 people worked at the RFS (Ensco Environmental Services, Inc. 1989). Staffing in 2017 is approximately 300 people. In 1989, UC management estimated that 250 to 300 people worked at the RFS (Ensco Environmental Services, Inc. 1989). Staffing in 2017 is approximately 300 people.

Portions of the Former RFS and the Regatta Property located west of the Former RFS make up the current BGC. The BGC provides for the development of additional facilities for both LBNL and UC Berkeley for academic teaching and research focused on energy, environment, and health. The LRDP for the property (UC 2014) identifies the developable portion of the new campus as the RES and the remainder as NOS Area. An LRDP is defined by statute (Public Resources Code 21080.09) as a “physical development and land use plan to meet the academic and institutional objectives for a particular campus or medical center of public higher education.” The LRDP for the property will guide growth and development of the campus through year 2050.

2.1.2 Historic Uses

Prior to settlement of the East Bay plain by the Spanish beginning in 1772, Native Americans used the area for fishing and harvesting shellfish. In the late 1800s, portions of the property were sold, and chemical and explosives industries moved into the area. Between the 1880s and 1948, several companies, including the California Cap Company (CCC), manufactured explosives at the RES (see RAW [Figure 2-3](#)). The CCC plant hosted several operations, including manufacturing explosives (primarily mercury fulminate), shells, and blasting caps; testing explosives; and storing explosives (URS Corporation [URS] 1999).

Two small companies, the U.S. Briquette Company and the Pacific Cartridge Company, are presumed to have operated on a portion of the RES. Both companies are shown on the 1912 and 1916 Sanborn maps, although the U.S. Briquette Company was noted as “not in operation” as of January 1912. Neither company is listed on the 1930 Sanborn map. No additional information is available about either facility. By 1920, the CCC was the only remaining explosives manufacturer on site.

The chief constituent of the explosive manufactured by the CCC was a nitrocellulose (guncotton) base called “tonite.” Manufacture of the explosive included production of mercury fulminate, a whitish-gray solid with the chemical formula $Hg(ONC)_2$, a key ingredient in blasting caps. The former mercury fulminate facility was in the southeastern portion of the RES (see RAW [Figure 2-4](#)). Other former facilities associated with the CCC included the former CCC shell manufacturing areas in the southern portion of the RES; the blasting cap manufacturing area in the central portion of the RES; an explosives test pit area in the northeast portion of the RES; and two explosive storage areas, both southwest of the former explosives test pit area (URS 1999).

According to an article published in the July 1922 edition of the CCC newspaper, *The Detonator*, the manufacturing plant consisted of approximately 150 buildings, including administration buildings, a shell and metal drawing unit, a wire drawing unit, the blasting cap line unit, an electric blasting cap unit, and fulminate nitrating and recovery units. A tram line, evident on Sanborn maps and historical photographs, was present between these buildings (see RAW

Figure 2-5). It appears from the photograph that the tram line was a rail system with a horse-drawn cart that moved supplies and other goods around the property. The entire CCC facility covered approximately 30 acres, with an additional 30 acres of trees surrounding the facility.

2.2 PREVIOUS INVESTIGATIONS AND REMEDIATION

This section summarizes previous investigations and remediation activities within the RES and RFS-wide groundwater. Section 2.2.1 briefly summarizes investigations that were conducted in the RES prior to the Field Sampling Workplan (FSW) that was prepared by UC Berkeley and approved by DTSC in 2010. Section 2.2.2 summarizes FSW Phases I, II, III, and IV investigation activities and sampling results from 2010 through 2012. Section 2.2.3 summarizes previous cleanup actions that have been conducted in portions of the RES between 2002 and 2004 as well as two TCRAs.

2.2.1 Pre-FSW Investigations

Investigations conducted between 1981 and 2008 involved collection of soil and groundwater samples in a variety of locations within the RES. Soil samples were generally analyzed for metals, PCBs, polycyclic aromatic hydrocarbons (PAH), semivolatile organic compounds (SVOC), or pesticides (Tetra Tech 2013). The investigations conducted prior to 2010 focused on potential source areas (see RAW Figure 2-3), and identified areas requiring further investigation. The data collected during these investigations is summarized in the CCR (Tetra Tech 2008a) and SCR (Tetra Tech 2013).

2.2.2 FSW Investigations

UC Berkeley completed FSW Phases I, II, III, and IV data gap investigations between 2010 and 2016. The FSW addresses data gaps identified in the CCR that warranted additional characterization or evaluation at RFS (Tetra Tech 2008a). The scope of the FSW groundwater investigation (Phase I) covered the entire Former RFS. The majority of the Phase II and III FSW soil investigations occurred within the RES; the Phase IV soil investigation of the Upland Meadows took place in the NOS. The Phase IV investigation also included investigation of the carbon tetrachloride area, which is located in the RES and NOS, via soil gas sampling. During the Phase IV investigation, two other investigations were conducted in the NOS: groundwater well installation and sampling in the vicinity of the biologically active permeable barrier within Western Stege Marsh, and an exploratory excavation of the Bulb.

The purpose of the FSW investigation was to close previously-identified data gaps, and to identify any immediate or potential risks to public health and the environment. Results are briefly summarized below and are described in detail in the SCR (Tetra Tech 2013) and in the Phase IV Sampling Results Technical Memorandum (Tetra Tech 2016).

2.2.3 Previous Cleanup Actions

Remedial activities occurred in three phases beginning in 2002. Remedial Phases 1 through 3 were completed in 2002, 2003, and 2004, respectively, under oversight of the RWQCB. A TCRA occurred near the FPL WTL in fall 2007 to remove arsenic-contaminated soils; the results are summarized in the TCRA Implementation Report (Tetra Tech 2008b). A second TCRA was

conducted south of the RES in fall 2008 to excavate soil associated with ash piles with elevated levels of PCBs; the results are summarized in the TCRA Implementation Report (Tetra Tech 2009). The TCRAAs were completed under DTSC oversight. [Figure C-5](#) shows locations of the previously remediated areas. [Table C-2](#) briefly summarizes these remediation activities.

2.3 CHEMICALS OF CONCERN

The results of the historical and FSW investigations indicate that elevated concentrations of certain metals, PAHs, and PCBs occur in RES soils, and soil sampling for these constituents is recommended throughout the RES. Other potential contaminants more limited in RES soils include dioxins, TPH, and volatile organic compounds (VOC); these contaminants are recommended for analysis in select locations of the RES.

Based on the historical use of explosives, explosives constituents are also recommended for sampling and analysis in select locations in the RES; however, explosives constituents have not been detected in previous soil sampling in the RES above Category I criteria.

For the purposes of this discussion, “elevated” concentrations in soil refers to soil concentrations above the screening criteria used in the SCR. Soil screening criteria used in the SCR include:

- Calculated human health RBCs for future commercial workers for metals, VOCs, SVOCs, pesticides, PCBs, and explosives (Tetra Tech 2013);
- The background value for arsenic (16 mg/kg) as established for the adjacent Campus Bay site and approved by DTSC for the Former RFS Site (Erler & Kalinowski, Inc. 2007; DTSC 2007);
- The ambient value for carcinogenic PAHs, as represented by BAP (EQ), which is equal to the 95th percentile Upper Confidence Limit (UCL) of the mean BAP (EQ) values of the ambient surface soil dataset from urban environments in Northern California of 0.4 mg/kg (DTSC 2009; Environ Corporation and others 2002);
- TSCA cleanup criteria for total PCBs in soil, high occupancy areas with no conditions (1 mg/kg) (EPA 2005); and
- Commercial environmental screening levels for TPH constituents (RWQCB 2013).

The SCR also identified two VOCs in groundwater (TCE and carbon tetrachloride) which have been detected above the calculated human health vapor intrusion RBCs for future commercial workers (Tetra Tech 2013). While these VOCs are not COCs in soil, future soil disturbance activities which occur in areas where the groundwater concentration exceeds vapor intrusion RBCs must take into consideration proper countermeasures to ensure protection of future commercial workers.

Metals

Arsenic concentrations above background levels in soils are the result of historical placement of pyrite cinders as fill material in the RES. Pyrite cinders, such as those used in production of sulfuric acid at the former Stauffer production areas, are produced from ore that is composed

mostly of iron sulfide but may also contain other metal sulfides, such as arsenopyrite, and concentrations of arsenic and other metals are often found above background levels in pyrite cinders. Other possible sources of arsenic include the historic use of arsenic containing herbicides on railways and the use of arsenic wood preservatives at the former FPL WTL. A removal action conducted at FPL WTL in 2007 removed arsenic contamination above background levels in the area of the research laboratory.

Potential sources of lead at RES include (1) historic emissions from automobiles, (2) a component of metals used in manufacture of shells and blasting caps, (3) pyrite cinders used as fill throughout RES, and (4) leaded paint from former or existing buildings. Some elevated concentrations of lead are in isolated areas of RES soils, perhaps attributable to the “nugget effect” that can occur when lead-based paint chips into soil.

Mercury is present at elevated concentrations in RES soils primarily due to historical activities associated with manufacturing explosives. The former CCC historically used elemental or liquid mercury in the MFA. This form of mercury can volatilize into the atmosphere from soil, sediment, or water. Drawings of the mercury fulminate production plant show an open structure (presumably for ventilation) and air stack which could have contributed to aerial deposition of mercury in the areas surrounding the mercury fulminate plant in the central meadow. Drawings also identify storage tanks rinsate areas in the MFA. Movement of the blasting caps around the facility via the tram system could have tracked mercury away from the mercury fulminate plant. As part of the remedy for the RES, UC has proposed a soil removal action in the MFA where concentrations of mercury elevated above the commercial risk-based concentration are present.

PAHs

PAHs in the RES are likely a result of burning carbon-containing compounds (including at the former waste incinerator near Building 120 and the former Field Laboratory), aerial industrial emissions from surrounding industrial facilities, and gasoline and diesel exhaust from regional roadways and railyards. An assessment of the soil data obtained from RES soils, mostly in the Corporation Yard, indicates that concentrations of PAHs decrease with depth; where PAHs are present, concentrations of PAHs are elevated above screening criteria in surface soils (0 to 0.5 feet below ground surface [bgs]), but are typically less than screening criteria at deeper depths (2 to 2.5 feet bgs), and non-detect below 2 to 2.5 feet bgs.

PCBs

PCBs are biopersistent organic chemicals that were used for many purposes from the initial commercial use in 1929 to when use was banned by EPA in 1979, including heat transfer fluids for gas turbines, hydraulic fluids for vacuum pumps, fire retardants, and plasticizers in adhesives, textiles, surface coatings, sealants, printing, and carbonless copy paper (Lloyd and others 1975). Aroclors-1248, -1254, and -1260 are commonly found in the RES, and are likely associated with hydraulic fluids and dielectrical fluids in capacitors and transformers. A release of PCBs to surface soils from a spill would have migrated little from its original release point, as PCBs sorb strongly to soil. This model is supported by the sampling data obtained during the FSW Phase II investigation, which sampled near former PCB-containing transformers. Where PCB contamination was detected, elevated concentrations of PCBs were limited to a small area, both horizontally and vertically, confirmed through step-out sampling.

PCBs have also been detected at low concentrations (below screening criteria) in surficial soils within the RES, most of which may not be attributed to a spill but possibly to aerial deposition from surrounding industrial facilities, including the PG&E facility northwest of the RES. As part of the removal action for the RES, UC will remove soils with total PCB concentrations greater than 1 mg/kg. The areas identified for PCB removal are located at two transformer areas and the Corporation Yard.

Dioxins

Dioxins in the environment are the result of burning chlorine-based chemical compounds with hydrocarbons, such as stack emissions from the incineration of municipal refuse and certain chemical wastes, or exhaust from automobiles powered by leaded gasoline. The former waste incinerator at Building 120 may be a potential historical source of dioxins; soil samples collected for dioxin analysis near the former incinerator location indicate that dioxin concentrations in that area exceed the commercial risk-based concentration in surficial soil, but concentrations decrease as sample depth increases.

VOCs

Although RES soils have not been found to contain concentrations of VOCs exceeding screening criteria, groundwater results indicate that TCE and carbon tetrachloride exceed groundwater screening criteria.

Groundwater impacted with elevated levels of TCE exceeding the commercial vapor intrusion risk-based concentration and the California and federal maximum contaminant levels (MCL) has migrated onto the Site from the adjacent former Zeneca Site. UC concludes that TCE and related breakdown products originated from legacy industrial activities at the former Zeneca Site, based on (1) the measured groundwater gradient from the former Zeneca Site to the Site, (2) known historical TCE sources and groundwater contamination at the upgradient former Zeneca Site, and (3) lack of measured or identified TCE sources within the Site. The remedy for contaminants in groundwater originating from the former Zeneca Site, including TCE and its breakdown components, is subject to the Zeneca Order.

Carbon tetrachloride was detected at piezometer location CTP (located in the upland meadows) at concentrations exceeding the commercial vapor intrusion risk-based concentration and California MCL during the FSW Phase I investigation. Carbon tetrachloride has also been detected at some of the piezometer locations downgradient of location CTP at concentrations exceeding the California MCL. No source of carbon tetrachloride has been identified in the immediate area or upgradient of the piezometer CTP. Soil gas sampling in October 2014 did not indicate a source in the investigation area, or a direction of a possible source.

TPH

Low concentrations of TPH compounds in soil may originate from small diesel spills from equipment, from aboveground storage tanks (AST) or former underground storage tanks (UST), from incomplete combustion of petroleum from nearby automobiles and industrial uses, or as a carrier in herbicides. No spills were observed at any of the ASTs still in place, and all USTs have been removed and administratively closed. Soil sample results indicated that the Earthquake

Engineering hydraulic lines at Building 484 leaked and soil excavation within this area was completed in October 2014 as a maintenance activity (UC Berkeley 2014b).

Explosives

Between the late 1800s and 1948, the CCC and other smaller companies, manufactured blasting caps, shells, and explosives on the property. The chief constituent of the explosive used by the CCC was a nitrocellulose (guncotton) base called “tonite,” the manufacturing of which included the production of mercury fulminate. Documentation indicates that nitrocellulose and mercury fulminate were the primary explosives used in manufacturing explosives on the property, however, other explosives such as octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine (HMX), cyclotrimethylenetrinitramine, or 2,4,6-trinitrotoluene may have been employed. Historical documents indicate that explosives were tested and stored in the north-central portion of the property (RAW [Figure 2-3](#)). Soil data to date indicates that HMX may have been used, as it was detected at a low level in one sample collected near the explosive storage area at a concentration of 0.37 mg/kg, five orders of magnitude below the commercial risk-based concentration.

2.4 SOIL MANAGEMENT PLAN AREAS

In order to determine the analytical requirements and density of sampling required for the SMP, the RES was divided into 25 SMP Areas. SMP Areas were created by reviewing historical activities, results of sampling conducted to date, contaminants previously detected, and removal actions conducted to date. Areas with similar site histories and uses that were adjacent were placed into the same SMP Area. [Figure C-3](#) presents the 25 SMP Areas, and [Table C-2](#) presents a summary of the characteristics considered for each SMP Area, including historical and current activities, previous cleanups, potential for pyrite cinders, and whether a groundwater concentration exceeds the commercial vapor intrusion risk-based concentration. EH&S will review [Table C-3](#) annually to incorporate data from sampling conducted following the publication of this SMP.

3.0 PROJECT DESCRIPTION AND DETERMINATION OF SAMPLING

This section describes types of projects subject to the SMP, spanning from small projects that may not require sampling to large projects which will implement the full range of sampling and soil management requirements presented in this SMP.

3.1 TYPES OF WORK

The LRDP for the BGC property includes redevelopment and construction of new buildings and support infrastructure within the RES which are anticipated to require large-scale soil disturbance. Routine maintenance and repair activities which require small-scale soil disturbance will also be required in the RES on an ongoing basis, independent of redevelopment under the LRDP.

The SMP will be implemented for all future projects conducted within the RFS portions of the RES that impact greater than or equal to 10 CY of in-situ surface or subsurface soils or result in a hardscaped surface of greater than 500 square feet. Examples of typical soil disturbance activities that are subject to the SMP include the following:

- Building construction
- Road construction
- Sidewalk construction
- Parking lot construction
- Major underground utilities construction associated with a project
- Significant landscaping activities

Soil disturbance activities that impact less than 10 CY of soil or less than 500 square feet of hardscape surface are not subject to the prescriptive requirements outlined in this SMP. These *de minimis* projects will be managed and overseen by UC EH&S as discussed in Section 1.1. Larger projects may not be identified as *de minimis* projects to avoid prescriptive sampling measures. For *de minimis* projects, EH&S may prepare SMP Form A to document the rationale for the *de minimis* determination or maintain other forms of documentation, such as emails. UC will notify DTSC and the community of *de minimis* activities consistent with current notifications provided to DTSC and the BGC community (e.g., work notices, posting of documents to DTSC's Envirostor database, regularly scheduled town hall meetings for BGC workers and tenants). Typical *de minimis* projects that will not be subject to the SMP include the following:

- Minor sidewalk or utility repairs
- Landscaping activities such as tree or shrub planting or removal and weed removal
- Installation of fence posts or signage
- Roadway asphalt repair

- Installation and decommissioning of soil boreholes and monitoring wells

Dewatering projects related to construction or soil disturbance activities are also subject to review under the SMP. In areas with known impacts to groundwater, the following actions will be implemented by EH&S:

- Perform an assessment of current groundwater monitoring reports to determine if there are impacts to groundwater in the work area, prior to installing dewatering wells.
- Prevent advancing any borings for dewatering purposes (or installing dewatering wells) which are screened across multiple water-bearing units.
- Secure all appropriate permits to discharge to sanitary sewer if dewatering is done in areas where impacts to groundwater are known.
- Enforce all groundwater discharge permit requirements associated with collecting or storing impacted groundwater, batch sampling, treatment prior to discharge to the sanitary sewer, or off-site disposal.

All soil disturbance or dewatering activities within the RES are subject to review and approval by EH&S. Soil disturbance activities within the RES subject to the SMP require written EH&S notification and approval, which is initiated through the completion of *SMP Form A, Project Overview*, included in [Exhibit C1](#). Activities requiring permits or work plan approvals, including the installation and decommissioning of soil boreholes and monitoring wells, will be obtained prior to the start of work. The extent of the EH&S approval process and supporting documentation will depend on the nature, size, and complexity of the project, as well as location of the project within the RES. A spreadsheet tracking all SMP projects is available to the public via the RFS environmental website.

The requirements of the SMP will be based on the scale and location of the proposed activity. All soil disturbance activities will require EH&S approval of the activity prior to soil disturbance, and projects subject to the SMP will require EH&S approval of SMP Form A. EH&S will provide SMP Form A to DTSC at least 14 days prior to the start of work or as soon as practicable during the next working day if the 14 days advance notification is not possible, such as for emergency repairs or other time-critical projects. In cases where pre-approval cannot be attained for projects requiring SMP Form A, such as for emergency repairs, EH&S will notify DTSC by telephone within 24 hours of the start of the activity or on the next working day if emergency repairs occur on a weekend or holiday, and SMP Form A will be completed within 48 hours, or on the next working day if emergency repairs occur on a weekend or holiday. Notification to all other appropriate agencies will also be provided as required by law.

3.2 POTENTIAL IMPACTS TO GROUNDWATER PIEZOMETER NETWORK

The RAW for the RES and Site-wide groundwater includes ongoing sampling at piezometers located throughout the RES. Efforts should be made to minimize any impacts to existing piezometers from a proposed soil disturbance activity. In the event that an activity impacts a piezometer, the piezometer must be properly destroyed and abandoned per Contra Costa County Environmental Health Department guidelines and a permit must be obtained; UC will notify

DTSC to propose a new piezometer location. All existing piezometer locations are shown on [Figure C-5](#).

3.3 SAMPLING REQUIREMENTS

Soil disturbance projects under the scope of this SMP are subject to the prescriptive sampling requirements discussed in Section 4.0. If UC proposes an alternative sampling plan which does not specifically follow the prescriptive requirements, EH&S will notify DTSC for review and approval of the proposed sampling plan.

3.4 DOCUMENTATION

EH&S will document EH&S approval and DTSC notification of projects subject to the SMP through the completion and submission of SMP Form A, Project Overview.

Instructions for Completing SMP Form A, Project Overview	
1. Tracking No., Revision No., and Date	Provide unique tracking number, revision number, and date of latest revision. For the tracking number, use the format YYYY-MM-DD-[Abbreviated Project Name].
2. Project Name	Provide unique project name.
3. Description	Include details necessary to implement SMP. Include specific location, description of activities impacting soil, estimate of total soil disturbance in cubic yards. Attach map indicating project location.
4. Points of Contact	Provide EH&S point of contact, facilities point of contact, or any other UC or other third party responsible for implementation of SMP requirements.
5. Estimated Schedule	Identify estimated schedule of entire project through completion. Update as necessary.
6. DTSC Work Notice Requirements	EH&S must provide DTSC a 14-day notice regarding projects involving excavation, drilling, or sampling for the purpose of collecting environmental samples or addressing soil management. DTSC issues a Work Notice to a community distribution list.
7. Impacts to Piezometer Network	Consult with SMP Figure C-5 to ensure project does not impact an existing piezometer, or propose replacement location to DTSC if necessary.
8. Affected Area Overlaps with NOS	Indicate if the project area footprint extends into area designated as NOS. If yes, then implement mitigation measures per the EIR for the property.
9. Radiological Status	Consult with SMP Figure C-6 and Table C-4 to determine if project is within an area of former radiological use. If yes, EH&S will coordinate with UC Berkeley's EH&S Radiological Safety Program to determine the radiological status and protocols necessary prior to proceeding.

Instructions for Completing SMP Form A, Project Overview (Continued)	
10. Total Volume of Soil Excavation Planned (in CY) and New Hardscape	Calculate the total in-situ volume of soil that is planned for excavation to complete the building or construct new hardscape.
11. De Minimis Status	Indicate if the project is exempt from SMP prescriptive requirements based on the volume of excavation or size of hardscaped area affected. Projects impacting less than 10 cubic yards of in-situ soil or 500 feet of hardscaped area are exempt from the SMP prescriptive requirements. EH&S may document the rationale for <i>de minimis</i> determinations in the SMP Form A.
12. Notes	Add notes here that do not fit into the above categories.
13. SMP Form A Approvals: EH&S; Facilities Management, UC Berkeley College of Engineering; and Professional Civil Engineer or Geologist	Form A must be signed and dated by EH&S staff responsible for implementation of SMP activities, as well as a representative from facilities management for the College of Engineering, and a professional civil engineer or geologist. Signature indicates review and approval of Items 1 through 6. Signature indicates that proper additional documentation necessary is included within EH&S files. EH&S will provide Completed SMP Form A to DTSC.

SMP Form A, which will include the project location map, will be completed by EH&S and submitted to DTSC and posted on the RFS Environmental website prior to any soil disturbance activities. SMP Form A will be updated and provided to DTSC if the project scope or conditions change, for example if the project area or estimated soil volume increases or the schedule has been revised. If after 6 months the project has not proceeded to the next step, the information on SMP Form A will be reviewed and updated as necessary. EH&S will maintain within UC files any additional internal documentation necessary in support of the information presented in SMP Form A. Supplemental documentation, if prepared, will be provided to DTSC or be available upon request from DTSC.

4.0 SAMPLING, DATA EVALUATION, AND SOIL MANAGEMENT ACTIONS

This section outlines the objectives and basis for projects subject to sampling under the SMP. Projects will be evaluated to determine the scope of sampling and analysis to be conducted prior to initiating earthwork activities.

The sampling protocols will be established on a site-specific basis, or may follow the prescribed protocols (number of sampling locations, sample depth, sample intervals), and chemical analyses presented in Section 4.1. Soil sampling will be conducted following the protocols outlined in [Exhibit C2](#), SAP. Soil sampling data will be evaluated per the guidelines in Section 4.2 to determine the appropriate soil management action determination presented in Section 4.3. Section 4.4 presents the planning documents necessary to manage soil in place or for off-site disposal. All sampling approaches will be submitted to DTSC prior to implementation.

4.1 PRESCRIPTIVE SAMPLING DESIGN

The sampling design is based on the location, footprint, and depth of the proposed soil disturbance. The prescriptive sampling designs presented below may be used in the event that a site-specific sampling strategy is not recommended by UC EH&S or DTSC.

Sampling Density and Recommended Analytes

Sampling design is initiated by identifying the SMP Area(s) impacted by the project through comparison to [Figure C-7](#). [Table C-3](#) presents the recommended sampling density and analytical requirements for each of the SMP Areas delineated on [Figure C-7](#).

Samples will generally be collected in a grid pattern to provide representative lateral coverage over the project area. Three categories of sampling density have been defined (low, medium, and high) as described below. The recommended sampling density for each SMP Area is a function of historical activity in the area and the results of previous investigations. Sample locations must be documented on scaled figure with appropriate landmarks or buildings identified. The required sample density for each SMP Area is specified in [Table C-3](#).

- Low density sampling requires sampling on a 125 foot grid spacing (one sample location per 15,625 square feet) – applicable in SMP Areas where no historical industrial activities occurred;
- Medium density sampling requires sampling on a 100 foot grid spacing (one sample location per 10,000 square feet) – applicable in SMP Areas where some historical industrial activities occurred, or an adjacent SMP Area has had a high level of historical industrial activities; and
- High density sampling requires sampling on a 75 foot grid spacing (one sample location per 5,625 square feet) – applicable in SMP Areas where a high level of historical industrial activities occurred.

There is no minimum number of sample locations required for each project; however, if a 95 UCL is to be calculated, as described in Section 4.2.2, a minimum of ten samples will be collected.

Known site conditions within the project area will be considered when developing the sampling design and analytes, to determine if any additional sampling is needed, or if sampling locations should be moved to characterize certain areas of the project to meet the intent of this SMP.

Factors to be considered include:

- Existing buildings, utilities and site features (current and any which will be demolished by a proposed project);
- Building construction history to determine potential for organochlorine pesticides under the foundation or PCBs, lead or asbestos in materials or near surface soils;
- Former buildings, remediated areas, and known pyrite cinder areas, as shown on [Figure C-5](#);
- Historical soil sample locations, sample depths, and sample analysis results, as presented in the Final SCR (Tetra Tech 2013). Historical sampling information may be used to supplement the sampling design; and
- Recent sampling data, if available.

Sampling Depth and Intervals

Samples will be collected in 0.5-foot depth intervals every 2 feet starting at the surface and extending to a depth of 2.5 feet below the depth of planned soil disturbance. This will allow documentation of potential residual soil contamination beneath the excavation. If the depth of the planned soil disturbance varies within the project area, the sampling design should be adjusted to provide representative coverage for the variable depths or by sampling subareas separately. Soil samples will be collected by hand or advanced through hand-auger techniques up to 5 feet bgs. For temporary projects (such as limited time installation research) or shallow utility line extensions, sample depths are not required to extend below the depth of the planned soil disturbance. Sampling methodologies will be conducted according the SAP.

Samples may also be collected at depths greater than 2.5 feet below the proposed excavation depth as part of characterization sampling; these samples will be held in the laboratory and analyzed in the case that concentrations from samples from 2.5 feet below the proposed excavation depth exceed criteria. Similarly, samples may be collected outside of the proposed excavation boundary and held in the laboratory, and analyzed in the case that concentrations from samples at the edge of the proposed excavation exceed criteria. Samples being held pending analysis will only be analyzed if the holding time has not expired. In cases where the holding time is exceeded, an additional sample would be collected at the edge of the final excavation to confirm that the criteria are not exceeded.

EH&S will determine the need for professional land-surveying for sampling locations on a project-by-project basis. For all other projects, hand-held devices using global positioning

systems will be used to record sampling locations and will be tracked in the geographic information system (GIS) database.

Soil Sampling for Lead Based Paint around Existing Buildings

Paints applied to the exterior of buildings constructed prior to 1993 are likely to have contained lead (DTSC 2006). Lead-based paint (LBP) may be present in the immediate vicinity of these buildings as a result of weathering, or past renovation activities resulting in deposition of LBP fragments to surface soil. Lead in soil from LBP from exterior paint is generally present only in the immediate vicinity of the building and in the top few inches of surface soil. LBP is generally not present where the building perimeter is hardscaped, such that paint chips are carried away by rain or wind, and does not accumulate.

Sampling for LBP-impacted soil will be conducted where the planned project boundary includes a building constructed prior to 1993.

Area of Potential Groundwater Concern

TCE and carbon tetrachloride concentrations exceed commercial vapor intrusion RBCs in portions of the RES, as discussed in Section 2.3. [Table C-3](#) identifies the four SMP areas where groundwater concentrations exceed the commercial vapor intrusion RBCs, indicating that indoor air concentrations of those VOCs may be present at levels posing risk to potential commercial receptors (Tetra Tech 2013). The selected remedy for groundwater at the Former RFS includes an ongoing groundwater monitoring program and implementation of the groundwater remedy for the adjacent former Zeneca site, which consists of treatment and ongoing monitoring. The groundwater remedy also includes monitored natural attenuation with a contingency for active treatment to address the carbon tetrachloride contamination in the northwest part of the RES (SMP Area 15).

If a soil disturbance project (1) consists of the construction of a new building or (2) extends deep enough to contact groundwater, and (3) is located in a SMP Area where groundwater results exceed the commercial vapor intrusion RBCs for VOCs identified in [Table C-1](#), then EH&S will consult DTSC before creating a sampling plan. Because VOC concentrations in groundwater are expected to change over time, site-specific evaluation is needed to determine if additional sampling protocols or worker protection precautions will be required, based on the project location. Given the ongoing nature of the groundwater monitoring programs, EH&S will consult the most current groundwater data available. A prescriptive approach for addressing potential groundwater concerns in the SMP is not appropriate.

If there is a concern regarding groundwater contamination along newly created-preferential pathways as a result of a new construction project (for example a deep utility corridor), then engineering parameters, such as impervious linings, will be developed under the project-specific design plan.

UC will evaluate potential impacts to groundwater in the event that a project involves the construction of a swale or permeable landscaping intended for the management of stormwater.

4.2 DATA EVALUATION

Soil sample data will be evaluated to confirm that the data set is complete, and data quality is acceptable. Data acceptance criteria and data validation protocols are provided in [Exhibit C2](#), SAP. Deviations from the sampling design, such as change in sample location, or analytical results which do not meet data quality criteria, will be evaluated to determine whether additional sampling is required.

4.2.1 Screening Criteria

Soil sampling data will be compared to two soil screening criteria to determine the management action that needs to be taken: (1) Category I criteria represent the most protective risk-based concentration (or background, ambient, or regulatory criteria, if available) and are protective of all future workers and visitors to the RES; and (2) Category II (On-Site Management) criteria represent the maximum concentration of chemicals in soil which may be managed in place within the SMP project area described in SMP Form A with a cover to prevent exposure to commercial workers or visitors. Category I and II criteria are presented in [Table C-1](#).

Category I criteria are based on the lowest of the calculated RBCs (of the commercial worker, construction worker, maintenance worker, and off-site receptor [inhalation only]), unless a background, ambient, or TSCA criterion is available, in which case the alternate values are selected. Category II criteria are generally based on the equivalent of one order of magnitude greater than the Category I criteria, with exceptions identified in [Table C-1](#). Screening criteria will be reviewed at least annually during periods when projects are occurring, in addition to the evaluation of remedy implementation that will occur as part of the five-year review process.

The section below discusses updates made to the screening criteria since the original publishing date (July 2014). The intent of this section is to maintain a record and chronology of changes along with the rationale for each change.

Updates to the Screening Criteria

The following updates were made to the screening criteria for Revision 1:

- Category I and Category II criteria for TPH constituents were updated to reflect the most stringent of the RWQCB Direct Exposure Soil Screening Levels for Commercial/Industrial Worker Exposure, any Land Use or Depth Construction Worker Exposure (Table S-1), or Leaching to Groundwater Nondrinking Water (Table S-2) (RWQCB 2016). These levels are protective of commercial workers and are appropriate for the exposure scenarios expected to occur at the RFS Site.
- The RBCs for total PCBs were updated to “- -” (not applicable) for each receptor to remove the inappropriately summed risk values. The Category I and II criteria of 1 mg/kg were maintained, in accordance with TSCA.
- Screening criteria for cobalt, manganese, and nickel were updated based on the Final Ambient Metals Evaluation, Aluminum, Cobalt, Manganese, and Nickel (Tetra Tech 2015).

- Aluminum was eliminated as a chemical of concern based on the Final Ambient Metals Evaluation, Aluminum, Cobalt, Manganese, and Nickel (Tetra Tech 2015).
- The Category II criteria for barium was updated to 21,100 mg/kg.

4.2.2 Determination of Soil Management Action

A comparison of the maximum sample result or the calculated 95 UCL (if available) to the Category I and II criteria will be used to determine how to manage the project soil. UC will determine the appropriate soil management actions for sampled project soil using the following decision matrix:

Comparison of Soil Concentrations to Screening Criteria	Soil Management Action
Maximum soil concentration or 95 UCL concentration does not exceed Category I criteria	No action; suitable for commercial reuse within the SMP project area.
Maximum soil concentration or 95 UCL concentration exceeds Category I criteria but does not exceed Category II criteria	Soil may be managed in place within the SMP project area with appropriate cover. Appropriate cover consists of hardscape (roadway, parking lot, sidewalk, or building) or a minimum of 2 feet of soil with concentrations less than Category I criteria, or as approved by DTSC.
Maximum soil concentration or 95 UCL concentration exceeds Category II criteria	Soil will be evaluated for off-site disposal, or DTSC will be contacted if proposed to be managed in place.

Delineation of Soil Exceeding Criteria

Additional soil samples may be collected in order to delineate the lateral and vertical extent of soil contamination exceeding Category I or II criteria in order to reduce the amount of soil that is planned for excavation or management in place. The sampling grid size for additional delineation sampling will be no less than twice the frequency of the original sampling. If significant excavation activities are already planned for the proposed project, additional sampling may be conducted during excavation activities rather than prior to excavation.

If the project soil concentrations are less than the Category I criteria, then the project may proceed without specific soil management practices, as outlined in the table above. Soil generated from the project must remain within the project boundaries described in SMP Form A unless DTSC has provided approval otherwise. The sampling results will be documented in a summary report and submitted by EH&S to DTSC with SMP Form B.

If soil is less than Category II criteria, then soil can either be managed in place within the SMP project area described in SMP Form A or excavated and managed through placement beneath 2 feet of soil below Category I criteria, or beneath a hardscaped surface, such as a roadway, sidewalk, parking, or building foundation, to prevent exposure of commercial workers and visitors to soil. Soil with concentrations exceeding Category II criteria will be excavated to a depth of 2 feet below the planned soil disturbance, effectively eliminating the direct contact exposure pathway, unless DTSC is contacted for approval to manage the soil in place. Soil excavated from a SMP project area will remain within the same SMP project area unless it is

disposed of off-site; if UC proposes to use the excavated soils in other portions of the RES, UC will contact DTSC for approval. The sampling results will be documented in a summary report and submitted by EH&S to DTSC with SMP Form B following project completion, as described in Section 6.0, Completion Reporting.

Soils exceeding Category II criteria will be transported off site to an appropriate disposal facility. Any deviations from the specified soil management requirements will be discussed with DTSC. Only soil which meets the DTSC Information Advisory, Clean Imported Fill Material requirements (DTSC 2001) may be managed without DTSC oversight or land use controls.

If the COC is PCBs (Aroclors), the soil will continue to be excavated until concentrations of total PCBs are less than or equal to 1 mg/kg. DTSC and EPA will be consulted on a case-by-case basis if soils with total PCB concentrations greater than 1 mg/kg are present below 10 feet bgs to determine if excavation below that depth is appropriate.

4.3 SOIL MANAGEMENT ACTIONS

Soil management will be conducted based on the criteria described in Section 4.2.

4.3.1 On-Site Management Plan

Soils exceeding Category I criteria, but less than Category II criteria, may be managed within the SMP project area described in SMP Form A, provided there is acceptable cover to eliminate the potential exposure pathway of human contact with the soil. Human receptors in the RES are commercial workers, construction workers, maintenance workers, and any on-site visitors. Category I criteria are protective of exposure to chemicals by off-site receptors via the inhalation pathway.

Acceptable covers include:

- A minimum of 2 feet of soil with chemical concentrations below Category I criteria; the overlying soil may not be breached. Prevention of breaches to the soil will be stipulated in the on-site management plan and managed by EH&S. In the event that the cover is breached, the breached area would be subject to renewed SMP requirements.
- Concrete building foundations and slabs with continuous coverage, which is laid directly over the soil or base rock layer above soil that will prevent contact with the soil;
- Asphalt or concrete pavement (and accompanying base rock) with continuous coverage, which is laid directly over the soil that exceeds the criteria.

A physical horizontal and vertical demarcation layer, such as geosynthetic fabric or snow fencing, will be placed over areas where soils exceeding Category I criteria, but are less than Category II criteria, are excavated or left in place and covered with an acceptable cover; the demarcation layer will be placed below the acceptable cover. Demarcation will not be required in the event that at least 2 feet of in-situ Category I soil (to be left in place) already covers Category II soil.

The on-site management plan will document the following:

- Summary of the proposed soil disturbance work, including location and depths of soil disturbance
- Data evaluation that supports the decision that the soil within the project area can be managed-in-place in accordance with the SMP
- Text and associated analytical results describing the cover or the materials to eliminate direct contact exposure pathway to commercial workers and visitors
- Figure showing the proposed cover area, material, and thickness

The on-site management plan will serve as the basis for the soil management action to be conducted during construction activities. The locations of covered soils will be documented in the closure reports for each SMP project, as well as in a centralized GIS database. The depth, cover material (if applicable), and management date of each of the excavated or covered areas will also be documented in the closure report for the SMP project and in the GIS metadata.

4.3.2 Soil Excavation Plan

Soil that exceeds Category II criteria will be excavated to a depth of 2 feet below the depth of project soil disturbance, or EH&S will consult with DTSC if other soil management actions are proposed. The area will be backfilled such that at least 2 feet of clean fill, or a permanent hardscaped surface, is placed above soil remaining in the excavation which exceeds Category I or Category II criteria. If site circumstances justify leaving the soil in place, UC will contact DTSC for approval.

A physical horizontal and vertical demarcation layer, such as geosynthetic fabric or snow fencing, will be placed over areas where soils exceeding Category II criteria have not been excavated. The demarcation layer will be covered with soil below Category I criteria.

The excavation plan will document the following:

- Summary of the proposed soil disturbance work, including location and depths of soil disturbance
- Data evaluation that supports the decision that the soil within the project area containing concentrations greater than the Category II criteria will be excavated for off-site disposal
- Text describing the placement and source of the imported clean fill or Category I soil, if applicable, to eliminate the direct contact exposure pathway to commercial workers and visitors
- Figure showing previous sampling locations and the proposed excavation and depths
- Description of how the excavated soil will be stockpiled, profiled and transported off-site for disposal
- Confirmation sampling plan

The excavation plan will serve as the basis for the soil management action to be conducted during excavation activities. The locations of excavated soils will be documented in the closure reports for each SMP project, as well as in a centralized GIS database. The boundaries of the covered areas will be determined using a hand-held GPS device or by other means to accurately map locations and incorporated into a site-wide figure showing movement of soils. The depth and excavation date of each of the excavated areas will also be documented in the closure report for the SMP project and in the metadata of the GIS figure.

4.4 DOCUMENTATION

EH&S approval of the sampling design, data evaluation, and soil management will be documented through the completion of SMP Form B, Sampling Design, Data Evaluation, and Soil Management Parts 1, 2, and 3 ([Exhibit C1](#)), and required supporting documentation. Whether or not EH&S elects to follow the prescriptive protocols or site-specific sampling, the sampling will be outlined in a sampling strategy memorandum provided to DTSC with SMP Form B, Part 1. EH&S will submit a data summary report with SMP Form B, Part 2, documenting the results of the sampling activities. If SMP Form B, Part 3 is required, EH&S will submit the soil management or excavation plan with sufficient detail, including the selection of remedial goals and the proposed actions. Instructions for completing SMP Form B and supplemental documents are presented below.

Instructions for Completing SMP Form B, Sampling, Data Evaluation, Soil Management	
1. Sampling Design	
a. SMP Areas Affected	Consult SMP Figure C-7 to identify SMP areas affected by project.
b. Sampling Density	Consult SMP Figure C-7 and Table C-3 to determine the number of sampling locations.
c. Chemicals of Concern	Consult SMP Table C-3 to identify soil analytical requirements. Include a summary of existing data within the sampling strategy memorandum.
d. Sampling Depth	Consult SMP Section 4.1 to identify required total sampling depth and intervals.
e. Project is within area of groundwater above screening criteria	Consult SMP Table C-3 to determine if project is within SMP area with potential for groundwater contamination or vapor intrusion. If so, consult with current groundwater monitoring program.
f. Sampling design meets all SMP prescriptive requirements	Evaluate if proposed sampling meets the prescriptive requirements outlined in SMP. If not, indicate if DTSC concurrence has been received on the site-specific sampling strategy.
2. Data Evaluation (Post-Sampling)	
a. Sampling Design Completed	Confirm all samples were collected and analyzed according to sampling design in Item 1.
b. Sample Results below Category I	Consult SMP Table C-1 for soil categorization criteria. If results do not exceed Category I criteria, EH&S submits SMP Form B with attached data summary report to DTSC. No further soil management actions are required. Category I soils are suitable for commercial use, and can be managed within the SMP project area. Soil excavated from a SMP project area will remain within the same SMP project area unless it is disposed of off-site; if UC proposes to use the excavated soils in other portions of the RES, UC will contact DTSC for approval.

Instructions for Completing SMP Form B, Sampling, Data Evaluation, Soil Management (Continued)	
2. Data Evaluation (Post-Sampling) (Continued)	
c. Soil Exceeding Category I is Defined Vertically and Laterally	If sample results exceed Category I criteria, then soil management is required, and the boundaries of contaminants exceeding criteria must be defined. If the project requires excavation, additional sampling may be conducted during or following excavation activities.
d. Soil Less Than Category II Criteria	If sample results are less than Category II criteria, soil may be managed on site within the SMP project area according to SMP Section 4.3, and an on-site management plan is required. If sample results are above Criteria II criteria, off-site disposal is required unless DTSC provides approval for on-site management. Review and approval of the plans is included in the item below. EH&S will submit SMP Form B to DTSC following project completion reporting discussed in Section 6.0.
3. Soil Management Action	
a. On-Site Management Plan Meets SMP Requirements	Consult SMP Section 4.3 regarding on-site management plan requirements. DTSC must be notified if deviations result in not adhering to the intent of the prescriptive portions of the SMP, for example, if sampling depths or frequencies are less than described in Section 4.1.
b. Excavation Plan Meets SMP Requirements	Consult SMP Section 4.3 regarding excavation plan requirements. DTSC must be notified of deviations which result in not adhering to the intent of the prescription portions of the SMP, for example if soils above Criteria II remain in place or the proposed cover does not meet the criteria presented in Section 4.2.1.
4. SMP Form B EH&S Approval	Form B must be signed and dated by EH&S staff responsible for implementation of SMP. Signature indicates review and approval of Items 1, 2, and 3. Signature indicates that proper additional documentation necessary is included within EH&S files. Completed Form B must be provided to DTSC.
5. References Used to Complete Form	Include names and dates of documents used to complete form.

EH&S will maintain within UC files additional internal documentation necessary in support of the information presented in SMP Form B. If SMP Form B has not been approved or no activities have occurred for 1 year, the information contained in the form must be reviewed and updated as necessary prior to work occurring in the project area. Supporting documentation will be available upon request from DTSC.

The following documents will be submitted as attachments to SMP Form B, as appropriate.

SMP Form B, Part 1 Sampling Design will document the planned sampling design. Prior to conducting sampling, a sampling strategy memorandum will be submitted as an attachment to DTSC with Part 1 of SMP Form B completed, which will include the following:

- Summary of the proposed soil disturbance work, including location and depths of soil disturbance
- Identification of the SMP Areas affected by the project area and corresponding sampling density and required analytes
- Description of the proposed sampling locations, sampling depths, sample identification scheme, and sample collection methodology

- Figures depicting project area, depths of proposed soil disturbance, and sampling locations, drawn to scale

SMP Form B, Part 2 Data Evaluation will document the sampling results. Following completion of sampling, if soil concentrations are less than the Category I criteria (no action required), EH&S will submit a data summary report with SMP Form B to DTSC and include:

- Summary of soil sampling conducted in accordance with the sampling design
- Summary of soil sampling location, depths, sample identification and analytical results compared to soil criteria
- Laboratory analytical reports
- Soil data evaluation results, including data completeness, and data quality

Documentation will be completed for these projects with the submittal of SMP Form B, Part 2.

For all other projects, where soil concentrations are greater than the Category I criteria, SMP Form B, Part 3 Soil Management Action will also be required, along with a soil excavation plan or on-site management plan with the components listed in Section 4.3; these documents will be submitted to DTSC prior to conducting the soil management action.

5.0 IMPLEMENTATION OF SOIL MANAGEMENT ACTIONS

This section describes management practices that will be employed whenever applicable during implementation of projects subject to the requirements of the SMP.

5.1 PRE-EXCAVATION ACTIVITIES

Pre-construction activities for any SMP project may include (1) permitting and notification, (2) health and safety, (3) stormwater pollution prevention plan (SWPPP) development and implementation, (4) utility clearance, (5) clearing and grubbing, (6) groundwater water level measurement, (7) piezometer abandonment and replacement, (8) building demolition and abatement, and (9) implementation of grassland protection measures. Determination of the need for each activity will be determined by EH&S.

5.1.1 Permitting and Notification

The following permits and notifications will be required to perform any soil disturbance activity subject to the requirements of the SMP:

- EH&S will approve contractor personnel and subcontracts for access consistent with UC Berkeley policies.
- DTSC notification at least 14 days in advance of field work.
- RFS on-site worker and employee notifications.
- Amend the existing Notice of Intent (NOI) and SWPPP or create a new NOI and SWPPP in compliance with the Construction General Permit and upload to the California State Water Resources Control Board SMARTS database.
- Well abandonment and well installation permits for piezometers planned for abandonment and installation from Contra Costa County Environmental Health.
- Appropriate permits associated with RES adjacency to NOS or other shoreline conditions, including San Francisco Bay Conservation and Development Commission, U.S. Army Corps of Engineers, or RWQCB notifications.

5.1.2 Health and Safety

All personnel entering the project control area which encompasses the excavation area and support areas, will read and comply with the requirements set forth in a site-specific Health and Safety Plan (HSP) prepared by the contractor. All contractors will be responsible for operating in accordance with the most current requirements of Title 8, California Code of Regulations, Section 5192 (8 California Code of Regulations 5192) and Title 29, Code of Federal Regulations (CFR), Section 1910.120 (29 CFR 1910.120), Standards for Hazardous Waste Operations and Emergency Response. Onsite personnel will be responsible for operating in accordance with all applicable regulations of the Occupational Safety and Health Administration outlined in 8 California Code of Regulations General Industry and Construction Safety Orders and 29 CFR 1910 and 29 CFR 1926, Construction Industry Standards, as well as other applicable federal,

state and local laws and regulations. All personnel working at the site shall have reviewed and signed the HSP, and a safety meeting shall be conducted at the beginning of each work day to review potential site hazards and safe working procedures.

In the case that an excavation is greater than 4 feet deep, the contractor will be required to submit to EH&S a detailed plan showing the design of shoring, bracing, sloping, or other provisions to be made for worker protection from the hazards of caving ground during the excavation, as appropriate. The proposed plan will comply with the State of California Construction Safety Orders and Title 24 of the California Code of Regulations. If the detailed plan varies from such shoring system standards, it shall be prepared by a registered civil or structural engineer.

5.1.3 Storm Water Pollution Prevention Plan Compliance

The current SWPPP that was developed for stockpiling of clean soils in the RES will be modified to incorporate information about excavation activities in the RES (4LEAF, Inc. 2013), or a new SWPPP will be completed. The SWPPP will outline the Best Management Practices that shall be used to prevent erosion or runoff of soil, silts, gravel, non-stormwater discharges, hazardous chemicals, or other materials that are prohibited by the General Construction Permit from being discharged from the project boundaries. The SWPPP will include specific references to regulatory guidelines and applicable UC SOPs.

5.1.4 Utility Clearance

Prior to mobilization for any soil disturbance activity impacting soils greater than 2 feet bgs, underground utilities must be cleared and marked with UC facility management and utility locator. UC facility management will be consulted to first check for the presence of known utility lines in the vicinity of the proposed excavation area, based on existing utility maps, available information, and a site walk. An underground utility survey will be conducted by a utility location contractor. It should be noted that existing utility location data at the facility may be incomplete: not all lines are identified on a map, and accuracy of identified utility line locations are limited. Plastic utility lines without metal tracer wire may be present. Underground pipes or utilities will be identified using hand-held detection devices, and utilities will be marked on the ground with indications (standard colors, letters, and numbers) of the assumed type of utility. This information will be provided to the EH&S for approval to excavate, prior to excavation activities. Regardless of utility clearance activities, all soil sampling to 5 feet will be conducted with hand auger equipment.

5.1.5 Ground Clearance and Grubbing

Prior to excavation, large debris, fencing and large vegetation (trees/shrub) will be cleared from the area to be excavated, either manually or using heavy equipment. Small trees/shrubs may be left in place for removal by heavy equipment during excavation. Water shall be applied to the soil surface to mitigate potential dust generation during all intrusive activities.

5.1.6 Groundwater Level Measurement

Groundwater in the RES varies from 3 to 16 feet bgs. For excavation activities disturbing soil to depths greater than 3 feet bgs, the depth to groundwater will be measured in the piezometers in

the vicinity; ideally, measurement will be collected from three piezometers surrounding the area, within a time period of few hours. The potentiometric surface elevation of the shallow groundwater at the proposed excavation site calculated using this information, will assist the field team to determine at which depth groundwater is likely to occur while excavating or disturbing soils.

5.1.7 Piezometer Abandonment and Replacement

If a piezometer is located within the project footprint and cannot be maintained following the project, the existing piezometer will be abandoned properly prior to the excavation of the area. The groundwater data to date will be reviewed and EH&S will determine whether a replacement piezometer should be installed. The abandonment of the existing piezometer, and a location of a replacement piezometer, if applicable, will be proposed to DTSC for review and approval prior to abandoning the impacted piezometer. The existing piezometer will be abandoned and the replacement piezometer will be installed according to Contra Costa County Environmental Health regulations. The replacement piezometer location and elevation will be surveyed by a licensed surveyor. The replacement piezometer will be developed to accommodate use for future monitoring activities.

5.1.8 Hazardous Material Abatement

As part of hazardous material abatement for building demolition projects, a number of programs will be followed regarding the survey, abatement, and mitigation of the potential presence of hazardous materials related to LBP, asbestos or asbestos-containing materials, PCB-containing caulking, or the application of pesticides at building foundations.

Soil containing hazardous material identified in the survey will be removed as directed by EH&S. The removal activity may be conducted in conjunction with the building demolition work, following relevant health and safety procedures for the work.

5.1.9 Implementation of Grassland Protection Measures

Prior to construction activities near the grasslands, the core prairie area will be marked at a minimum with temporary fencing and signage, consistent with the recommendations in the Coastal Terrace Prairie Management Plan (UC 2014, Appendix G). Temporary construction fencing in the vicinity of the grassland portion of the NOS shall consist, at minimum, of steel t-posts and 4 feet tall red plastic netting.

5.1.10 Implementation of Archeological Resource Protection Measures

To protect archaeological artifacts potentially present in subsurface soils, all subsurface activities, including the possible identification and recovery of archaeological artifacts, would be conducted in accordance with the applicable BGC health and safety plans to ensure protection from known and potential hazards. In addition, consistent with DTSC protocols for addressing archaeological artifacts in contact with contaminated media, UC would work directly with DTSC and the appropriate trustee organization for each artifact on a case-by-case basis to ensure proper treatment of the artifacts.

5.2 EXCAVATION ACTIVITIES

The following subsections describe management practices that will be implemented as applicable when excavating contaminated soil. The excavation process may include: (1) excavation of contaminated soil, (2) pyrite cinder management, (3) erosion and dust control, (4) decontamination, (5) confirmation sampling, and (6) contaminated soil management. Applicable excavations include:

- Excavation to remove soil containing chemical concentrations greater than Category I criteria, but less than Category II criteria (for potential use below an acceptable cover within the SMP project area described in SMP Form A)
- Excavation to remove soil containing chemical concentrations greater than Category II criteria (for off-site disposal)

Implementation practices for excavation activities conducted (1) to geotechnically or structurally prepare a project footprint for construction; or (2) within project footprints that have been pre-characterized as containing soil with concentrations less than Category I criteria (and thus no soil management action is required) are not included in this SMP, and will be described within the project-specific construction documents.

5.2.1 Excavation

Excavation activities will be conducted when characterization soil sampling results (based on the 95 UCL concentrations, or the maximum concentration if less than ten samples are collected) are greater than Category I or II criteria, per the soil management options described in Section 4.0. Characterization sampling will be conducted prior to excavation. During excavation, soils will be visually observed for unusual soils such as pyrite cinders, petroleum stains, or alum mud; if observed, excavation will be stopped until the identified soil is managed by EH&S staff.

Excavation will be conducted in a safe manner with proper sloping of sidewalls. Excavation will not extend below groundwater level. Workers will not be allowed to enter the excavation when it is deeper than 4 feet, unless the excavation is properly shored or sloped. All identified utilities in the excavation footprint will be deenergized or disconnected prior to any excavation.

5.2.2 Confirmation Sampling

To determine the final depth and width of the excavation, confirmation soil samples will be collected from the bottoms and sidewalls of the excavations to evaluate if sufficient soil impacted with concentrations of chemicals exceeding Category I or II criteria has been removed. Confirmation samples will initially be analyzed for all analytes specified in the prescriptive sampling plan ([Table C-3](#)). All sampling and analysis activities will be conducted consistent with the protocols identified in the SAP ([Exhibit C2](#)).

Confirmation samples will be collected at the same grid spacing as indicated on [Figure C-7](#) (low, medium, or high density). Sampling required for each of the grid spacing categories consists of the following:

- Low – 125 foot grid spacing (one sample location per 15,625 square feet) – applicable in SMP Areas where no historical industrial activities occurred;
- Medium – 100 foot grid spacing (one sample location per 10,000 square feet) – applicable in SMP Areas where some historical industrial activities occurred, or an adjacent SMP Area has had a high level of historical industrial activities; and
- High – 75 foot grid spacing (one sample location per 5,625 square feet) – applicable in SMP Areas where a high level of historical industrial activities occurred.

At least one confirmation sample will be collected at the base of each excavation and one sidewall sample will be collected from each excavation sidewall. If chemicals are present in confirmation samples (based on the 95 UCL concentrations, or the maximum concentration if less than ten samples are collected) at a concentration exceeding the Category I or Category II criteria (depending on the remediation criteria), then the excavation will be expanded either laterally for sidewall samples or vertically for bottom samples. Confirmation sampling frequency may be increased based on the results of the initial or subsequent confirmation sampling results, or visual observations.

For sidewall samples that exceed the criteria, the excavation will be expanded approximately 5 feet laterally, and then resampled. For bottom confirmation samples that exceed the criteria, the excavation will be expanded approximately 1 foot vertically, with the provision that excavation will not extend to such depth as to extend into standing groundwater. The distance to expand an excavation laterally and vertically may be adjusted based on site-specific or project-specific conditions. The excavation and confirmation sampling process will repeat until sample results are below the appropriate criteria, or unless DTSC has approved adequate excavation has been conducted. EH&S will contact DTSC for concurrence if there are proposed deviations from this approach.

The horizontal location and depth of each confirmation sample will be accurately recorded on the as-built plans and all final confirmation sample results will be recorded for presentation in the Completion Report, which will accompany SMP Form C.

Continuous observation of soil will be required as it is excavated to observe the soil for indications of potential contamination such as pyrite cinders or unusual debris. If workers observe unusual debris, EH&S will be notified prior to proceeding with excavation in the area. If pyrite cinders are observed, the soil will be managed as described below.

5.2.3 Cinder Management

Cinder management applies to the management of pyrite cinders and soils impacted by pyrite cinders during any soil disturbance activity, regardless of the size of the expected soil disturbance. Cinder management is based on and is consistent with the previous cinder management strategy implemented at Former RFS, as documented in the *Pyrite Cinder-Containing Soil Management Procedures* (UC Berkeley 2007) and its attachments *Regulatory Status of Soils Excavated During Replacement of Old Sewer Lines* (DTSC 1993) and *In-Trench Reuse of Contaminated Trench Spoils during Utility Excavations* (RWQCB 1995).

EH&S or EH&S-trained personnel will conduct inspections during excavation where cinders are expected during the following activities:

- Building construction earthwork
- Drainage pipe or culvert installation
- Sewer or water main installation or removal
- Road work where excavation is required as part of drainage or road base installation
- Building renovation work that involves the types of underground utility work discussed above

EH&S does not expect that direct oversight and inspections will be necessary during smaller projects, including:

- Tree planting and removal
- Minor landscaping projects not intended to impact subsurface soils such as routine maintenance, weed control, and plantings
- Small irrigation line work and repairs
- Emergency utility work

During soil disturbance activities that are not conducted to remove contaminated soil, excavated soils, including those mixed with cinders, may be deposited back into the original excavation, assuming that there is no complete exposure pathway identified. Exposure pathways are eliminated if cinders are placed beneath 2 feet of native or clean fill, or a hardscaped feature such as a roadway, parking lot, or building foundation. Cinders will not be placed back into the original excavation if the highest measured groundwater is within 5 feet of the bottom of the excavation and placed no closer than 2 feet to the surface, unless approved by DTSC. If cinders are excavated from an excavation less than 2 feet deep, cinders cannot be replaced in that excavation unless covered with hardscape, or with DTSC approval. For projects which qualify as *de minimis*, EH&S will evaluate if placement of cinders within shallow excavations is protective of possible future exposure. To the extent that no removal of cinders from the project area is involved and that all material can be placed back into the excavation, EH&S will likely not perform cinder sampling.

During soil disturbance activities that are conducted to remove contaminated soil, cinders will be removed from the excavation if they are within the original excavation footprint.

Displaced soil suspected of, or known to contain cinders, which cannot be placed back into the excavation will be assessed to determine if it exhibits a characteristic specified in Identification and Listing of Hazardous Waste, Chapter 11, Title 22, California Code of Regulations. EH&S will sample the material and determine the proper method of disposal. While sample results are pending, the material will be stored in covered stockpiles, covered bins, or drums. If the displaced soil is determined to be a hazardous waste, it will be managed in accordance with all California and Federal hazardous waste laws and regulations. If the presence of cinders has not

been confirmed, then soil characterized as having concentrations below Category I criteria may be reused within the SMP project area. Soil characterized as having concentrations below Category II criteria can be managed in place within the SMP project area described in SMP Form A. Soil management in place generally consists of placement of soil beneath 2 feet of clean fill, under a roadway or parking lot, or building foundation, as defined in Section 4.3.1.

EH&S will track areas where cinders are encapsulated in a GIS-based map to ensure that the cinder material remains isolated. Any cinders-contaminated soil discovered during small excavations that is not managed in place will be sampled for management and disposal and results will be reported in writing to DTSC.

5.2.4 Erosion, Dust Control, and Air Monitoring

All excavated soils will be managed to prevent dust, spills to the ground or water, disposal into drains, and exposure risk to people or the environment. Excavation, transportation, and handling of all soil must result in no visible dust at the fence line of the excavation. Any soil material proposed to be placed as fill, whether from an offsite source or onsite source, will be kept covered or moist to facilitate eventual compaction and to control dust during earthwork operations. A water truck, water tank, or hydrant will be available to supply water in sufficient quantity on the job site while earthwork operations are underway. Sufficient water will be applied to suppress dust while exercising care to avoid generating runoff to any area outside the project boundary. Dust control measures will be implemented, as appropriate and necessary, beginning with site mobilization and continuing during all phases of the construction activities. Water will not be applied if there is a possibility of spreading contaminated soil or leaching contaminants from the soil, or if it results in hazardous working conditions.

Erosion and Dust Control

Contractors will not be allowed to stockpile material containing or suspected to contain hazardous waste or contamination unless covered and protected from rain or wind erosion for the duration of the construction project. Stockpiles of material containing hazardous waste or contamination will be placed on plastic sheeting of adequate thickness to contain the soils, and will not be placed in areas potentially affected by surface run-on or run-off. Contaminated and clean soils material will not be allowed to enter storm drains, inlets, or waters of the State. The plastic sheeting used to cover the soil must be anchored to the ground and weighted as necessary to securely and completely cover the stockpiled soil to prevent wind-blown dust from being generated. All stockpiled soil must be managed in accordance with the requirements outlined in the SWPPP and Section 5.1.4 of the RAW. EH&S will review and approve the project-specific SWPPP prior to submittal to the State Water Board. EH&S or EH&S-trained personnel will conduct inspections during work where soil is disturbed, including:

- Building construction earthwork
- Excavation of contaminated soil
- Loading and transportation of soil
- Drainage pipe or culvert installation

- Sewer or water main installation or removal
- Road work where excavation is required as part of drainage or road base installation

The construction general permit, if applicable to the project, requires that all SWPPP-related inspections must be performed by a Qualified SWPPP Practitioner (QSP) or Developer (QSD). The QSP or QSD can delegate other trained staff to perform some of the inspections on their behalf but the QSD or QSP must do some of the inspections since they have to certify the inspections.

EH&S does not typically require direct oversight and inspections for smaller projects, including:

- Tree planting and removal
- Landscaping projects impacting less than 10 CY
- Small irrigation line work and repairs
- Soil sampling and piezometer installation
- Emergency utility work

If the excavation is to be conducted when rain is possible, the site work must be carefully executed to contain potentially contaminated surface water, groundwater in excavations, muddy soils within the project area, and prevent off-site tracking of sediment and soils to adjoining roads.

Air Monitoring

Exposure monitoring and air sampling will be evaluated for each SMP project to monitor possible airborne levels of contaminants down-wind from any excavation and stockpile areas, and ensure that all on- and off-site workers are protected. The monitoring will help assure that excavation activities do not pose unacceptable concentrations to project personnel or any down-wind human receptors.

Prior to beginning construction for a project, a description of the conditions under which air monitoring would take place, the general approach that would be used by EH&S to develop action levels, a general description of the air monitoring equipment expected to be employed, and a citation to any appropriate health and safety plans.

Pertinent project information to decide if a project requires air monitoring include:

- Project size and location
- Nature of project and potential to generate airborne particulates or dust
- Contaminant concentrations
- Proximity to potential on-site and off-site receptors

Should air monitoring be required for a project, action levels will be developed using available soil sampling data to determine the chemicals of potential concern for the project, the potential concentration of the chemicals in dust, and acceptable concentrations in dust (including risk-based concentration). The potential concentrations of chemicals in dust will then be compared to the acceptable concentrations and action levels will be established. It is anticipated that only large projects or projects in areas with elevated soil concentrations would require perimeter dust monitoring using real-time aerosol monitors (such as the MIE Personal Data RAMs) equipped with data loggers to provide immediate information for the total dust levels present. Should analyte-specific monitoring be required (such as for mercury vapors), equipment and additional action level criteria will be included in the project construction plans or a separate air monitoring plan.

5.2.5 Decontamination

An exclusion zone will be established around the project's excavation area. Access to and from the exclusion zone by personnel and equipment will be controlled to mitigate site risks and prevent the spread of contamination. Decontamination procedures for workers will be established in the HSP.

A lined decontamination pad appropriately sized for storage and treatment of all anticipated rinse water will be placed just outside the exclusion zone and near the excavation area. The pad should be sized to collect decontamination water and overspray. Collection and removal of the decontamination water and precipitation captured in the decontamination pad will be conducted utilizing sumps, dikes, ditches, and holding tanks as required. The pad design will depend on the size and duration of the project. For smaller projects, a lined bermed area with water collection to drums via a sump pump at the low end is sufficient. The decontamination pad design will be approved by EH&S prior to construction.

All wastes including liquid wastes and non-hazardous or hazardous contaminated soils will be managed to prevent uncontrolled releases outside of the project area. Contaminated material handling and storage is discussed in Section 5.2.6.

All vehicles exiting the site will be inspected to be free of mud on tires, wheel wells, undercarriage, and other exposed surfaces outside the covered truck bed or roll-off bin. Vehicles will be cleaned as necessary prior to leaving the decontamination area.

5.2.6 Waste Handling and Storage

Wastes generated during excavation and investigation will include hazardous and nonhazardous soil, decontamination water, and other investigation-derived waste (IDW). Wastes will be handled and stored according to the protocols below and all state and federal laws. Storage containers will be in good condition and constructed of materials that are compatible with the material to be stored. Storage of IDW and soil stockpiles will not be allowed on coastal terrace prairie grasslands, or anywhere in the NOS. Each container will be clearly labeled with an identification number and a written log will be kept to track the source of contaminated material in each temporary storage container. Samples of soils and liquids will be collected and analyzed for contaminated material in conformance with state and federal criteria as well as to the requirements of the treatment or landfill facility, as further described in Section 5.3.1 below.

Hazardous Soils

Soil with chemical concentrations known to be TSCA waste, Resource Conservation and Recovery Act hazardous waste, or California hazardous waste, based on results from prior sampling or EH&S knowledge, will be stockpiled separately from soils with unknown chemical concentrations, or concentrations less than hazardous waste criteria.

For temporary storage of contaminated soil or hazardous soil remediation waste storage, securely covered stockpiles, drums, or metal containers will be utilized. Drums and other metal containers must be appropriately labeled per all applicable legal requirements.

Stockpiles will be constructed to isolate stored contaminated material from the environment. Stockpiles will be placed on and covered with a chemically resistant geomembrane liner free of holes and other damage. Stockpiles will be managed in compliance with Section 5.1.4 of the RAW and the applicable SWPPP as modified for the soil management action, to prevent pollutants from being discharged from the project boundaries.

Roll-off bins used to temporarily store contaminated material will be water-tight. A cover will be placed over the bins to prevent precipitation from contacting the stored material. Excavated soil containing pyrite cinder must be segregated and stored in covered bins, drums, or other suitable container.

Nonhazardous Soils Waste

Excavations and investigations may generate nonhazardous soil waste. Soils that are considered potentially contaminated will be segregated from nonhazardous waste and clean soils until characterized. Soils with chemical analysis results that do not exceed state or federal hazardous waste criteria concentrations are considered nonhazardous soils only if approved by EH&S.

Nonhazardous soils may be used on-site consistent with the provisions of the SMP, or may be removed from the property only if directed and approved by EH&S.

Waste Water

Liquid collected from personnel and equipment decontamination operations will be temporarily stored in drums or other suitable containers. Water from heavy equipment decontamination, excavations, and stockpile areas will be temporarily stored in tanks, drums, or other suitable containers. Stored wastewater containers will be appropriately labeled per all applicable legal requirements.

Aqueous waste will be analyzed per the requirements of the SWPPP and project COCs. If analytical test results show that the water is not contaminated and within limits for onsite discharge then it will be disposed of on-site per the SWPPP. Waste water not suitable for on-site disposal will be managed consistent with Section 5.3.1.

5.3 POST-EXCAVATION ACTIVITIES

Post-excavation activities include waste classification and transportation, and site restoration.

5.3.1 Waste Classification, Transportation, and Disposal

Wastes and their expected waste classifications anticipated to be generated during excavation will include the following:

Type of Waste	Expected Waste Classification
Soil containing chemical concentrations less than hazardous waste criteria	Nonhazardous solid waste
Soil containing chemical concentrations greater than hazardous waste criteria	Hazardous solid waste
Soil containing PCB concentrations greater than 1 mg/kg	TSCA solid waste
Aqueous wastes from decontamination water and any surface water contained onsite	Nonhazardous or hazardous liquid waste (pending waste characterization results)
IDW (PPE and disposable sampling equipment)	Nonhazardous solid waste or hazardous solid waste, consistent with soil or aqueous waste determinations

Waste Classification

Waste codes applicable to each hazardous waste stream will be identified based on the requirements in 40 CFR 261 and California Title 22 California Code of Regulation 66261, and any other applicable state law or regulation. All applicable treatment standards in 40 CFR 268 and state land disposal restrictions will be identified and a determination will be made as to whether or not the waste meets or exceeds the standards. Wastes with total PCB concentrations greater than 1 mg/kg will be disposed of off-site at an appropriate facility for TSCA waste. Waste profiles, analyses, classification, and treatment standards will be according to the requirements of receiving facility and will be reviewed and approved by EH&S prior to any waste disposal activities.

Existing data for the excavated soil may be sufficient to meet disposal facility profiling requirements. If, however, the selected disposal facilities require additional profiling, or if EH&S elects to conduct additional waste profiling, samples will be collected from the excavated soil and analyzed for the constituents specified by the selected disposal facilities.

To characterize soil for disposal, waste characterization samples will be collected to adequately meet the representativeness and variability goals identified in SW-846 Chapter 9. Waste characterization sampling will be proposed on a case-by-case basis, to allow for incorporation of site conditions, SMP sampling results, and waste stream volumes.

Analytical criteria are dependent on the requirements of the receiving facility; therefore, the receiving facility will be consulted prior to analysis of the samples. Additional tests may be needed based on the results of the initial tests. Once characterized, the waste will be classified and disposed according to federal and state regulations.

A waste acceptance letter will be obtained from each selected disposal facility. Waste profile sample results and documentation will be included in the Completion Report, which will accompany SMP Form C.

Waste Transportation

Manifests will be used for transporting hazardous wastes as required by 40 CFR 263 and applicable state law or regulation. Transportation will comply with all requirements in the Department of Transportation referenced regulations in the 49 CFR series. Manifests and waste profiles will be reviewed and approved by EH&S prior to any waste transportation activities. Land disposal restriction notifications will be prepared as required by 40 CFR 268 and any applicable state law or regulation for each shipment of hazardous waste and will be reviewed and approved by EH&S. Hazardous waste manifests will be prepared for each shipment of waste shipped offsite using instructions in 40 CFR 761, Sections 207 and 208 and all other applicable requirements. Soil waste will be removed from the site in compliance with all U.S. Department of Transportation regulations and will be covered to prevent soil loss during transport.

Waste Disposal

No soils will be removed from the site for offsite disposal without EH&S permission. Soils designated for off-site soil disposal will first be sampled according to the requirements of the potential receiving facility and in compliance with all state and federal waste classification requirements. All contaminated nonhazardous or hazardous soil waste will be disposed at an appropriately permitted landfill or treatment facility. Personal protective equipment (PPE) and disposable sampling equipment will be disposed of offsite as hazardous or nonhazardous waste.

5.3.2 Site Restoration

Excavations will be backfilled as soon possible after all contaminated materials have been removed and confirmation test results have been evaluated by EH&S. As discussed in Section 4.3.1, before placing backfill, a demarcation layer will be placed along the bottom and sides of the excavation, if soil exceeding Category I criteria is to be left-in-place, to indicate the extent to which soil was excavated and backfilled. If UC construction specifications apply, soil will be spread, moisture conditioned, and compacted in 8- to 12-inch thick loose lifts to 95 percent relative compaction or greater relative to the modified proctor standard (American Society for Testing and Materials D1557).

Backfill Material

All fill material, imported or otherwise, will be entirely free of refuse and any other deleterious material. If UC construction specifications apply, a testing laboratory or the project geotechnical engineer will be retained to certify that all fill has been spread, compacted, and tested to meet the compaction standards established for the project.

As discussed in Section 5.2.6, soil with concentrations of COCs below Category I criteria may be used as backfill in the same excavation, or at another location within the RES with DTSC approval.

Other sources of imported clean fill are also permitted at the BGC. In order to minimize the potential of introducing contaminated fill material, documentation will be verified that the fill source is appropriate, as outlined in the Imported Soils Sampling and Analysis Requirements to

Assess Contaminant Concentrations included as [Attachment C2](#). Potential sources of imported fill will be sampled as recommended in the Cal/EPA DTSC Information Advisory, Clean Imported Fill Material (DTSC 2001). Fill documentation will include detailed information on the previous use of the land from where the fill is taken, whether an environmental site assessment was performed and its findings, and the results of analytical testing performed. If such documentation is not available or is inadequate, samples of the fill material will be chemically analyzed. Analytical methods required for the fill material will be based on the source of the fill and knowledge of the prior land use. The number of samples per volume of imported fill will be determined according to the table in the “Waste Characterization” section above.

Analytical results of potential imported fill will be compared to the following criteria to determine if the fill can be imported and used:

- Category I criteria ([Table C-1](#))
- Total threshold limit concentrations (Title 22 of the California Code of Regulations)

EH&S personnel will review fill documentation before approving acceptance of fill soil, and will notify DTSC before any soil is imported for use. EH&S will provide written notification, all analytical results, and location and history of source area to DTSC, as part of the documentation included in SMP Form C.

6.0 COMPLETION REPORTING

Completion reporting is conducted for all projects requiring soil excavation or on-site management. Completion reporting will document all portions of the SMP relevant to proper sampling and management of soils.

Projects with soils exceeding Category I criteria will require an on-site management or excavation plan per Section 4.3 and will also require documentation of all activities following completion of the soil disturbance project. Documentation of project completion will be addressed through SMP Form C, Completion Report ([Exhibit C1](#)) and within a final project completion report. Instructions for completing SMP Form C are presented below. Geologic or engineering plans, specifications, drawings, and reports contained in the Completion Report will be prepared by, or under the direct supervision of, a California professional geologist or civil engineer, as appropriate, who will review and sign all such documents indicating responsibility for their content. If UC elects to select alternative methods for soil sampling and management for a project, EH&S will prepare a detailed completion summary report for submittal to DTSC for concurrence in lieu of SMP Forms and attachments. If SMP Form C has not been approved or no activities have occurred for 1 year, the information contained in the form will be reviewed and updated as necessary prior to submittal of the completion report.

Instructions for SMP Form C, Completion Report	
1. Summary of Completed Construction Project	Provide description of the completed construction project, with specific attention to final surface grade, including asphalt, concrete, landscaped areas, or building footings. The intent is to describe any possible exposure pathways to Category II soils, if applicable.
2. Dates of On-Site Project Work	Provide the dates of each step of the project conducted on-site (sampling, soil management actions, soil disposal).
3. Summary of Completed Soil Management Actions	Provide description of any on-site or excavation soil management activities completed.
4. On-Site Management Plan Implemented	Confirm that the on-site management plan was implemented according to SMP Form B, Item 3a, if applicable. Include any deviations from the plan, if appropriate.
5. Soil Excavation Plan Implemented	Confirm that the excavation plan was implemented according to SMP Form B, Item 3b, if applicable. Include any deviations from the plan, if appropriate.
6. Project Completion Report Meets SMP Requirements	Final confirmation that all soil sampling and management activities were completed according to the SMP requirements. Attach completion report which discusses soil sampling design, sampling results, data evaluation, soil management practices, and final construction project completion, and includes a reference list.
7. SMP Form C EH&S Approval	Form C must be signed and dated by EH&S staff responsible for implementation of SMP. Signature indicates review and approval of Items 1 through 4. Signature indicates that proper additional documentation necessary is included within EH&S files. EH&S will provide SMP Form C to DTSC.

In addition to SMP Form C, EH&S will prepare a completion report to provide to DTSC. As discussed in Section 1.4, UC will post completion reports on the RFS Environmental website,

and DTSC will post completion reports to DTSC's Envirostor website for the former RFS. The completion report will include the following information documenting the soil management action completion:

- Summary of previous soil sampling, analytical results, and data evaluation
- Summary of soil management strategies and actions conducted
- Summary of the soil excavation work, including location and depths of excavation activities
- Discussion of any deviations from the soil excavation or on-site management plan
- Text describing the final cover or the materials to eliminate direct contact exposure pathway to commercial workers and visitors
- Figures indicating all sampling locations, Criteria I or II exceedances, final excavation areas, and cover area, material, and thickness, if appropriate
- Summary of disposition of excavated soil (off-site disposal or on-site management)
- Summary of all confirmation sample results
- Summary of backfill, final grade, and final project description
- Copies of signed hazardous waste manifest and bill of lading

7.0 REFERENCES









- 4LEAF, Inc. 2013. Storm Water Pollution Prevention Plan for the Stockpiling of CRT Soil at the Richmond Field Station, Richmond, California. January 23 (revision to original submitted October 22, 2012).
- California Department of Toxic Substances Control (DTSC). 1993. Regulatory Status of Soils Excavated During Replacement of Old Sewer Lines. Prepared by Watson Gin, Chief, Permit Streamlining Branch, Hazardous Waste Management Branch, Department of Toxic Substances Control. December 2.
- DTSC. 2001. Department of Toxic Substances Control, Information Advisory, Clean Imported Fill Material. October. Available on-line at:
www.dtsc.ca.gov/Schools/upload/SMP_FS_Cleanfill-Schools.pdf
- DTSC. 2006. Interim Guidance, Evaluation of School Sites with Potential Soil Contamination as a Result of Lead from Lead-based Paint, Organochlorine pesticides from Termiticides, and Polychlorinated biphenyls from Electrical Transformers. Revised June 9.
http://www.dtsc.ca.gov/Schools/upload/Guidance_Lead_Contamination_060912.pdf
- DTSC. 2007. Letter to Doug Mosteller, Cherokee Simeon Venture I, LLC, from Barbara Cook, DTSC, Concurring on the Recommendation of 16 mg/kg Arsenic as a Good Estimator of the Upper Range of the Ambient Distribution of Arsenic at the Campus Bay Site. October 1.
- DTSC. 2009. Use of the Northern and Southern California Polynuclear Aromatic Hydrocarbon (PAH) Studies in the Manufactured Gas Plant Site Cleanup Process. July 1.
- Enesco Environmental Services, Inc. 1989. "Environmental Assessment of University of California Richmond Field Station." Richmond, California. August.
- Environ Corporation, Entrix, IRIS Environmental, and Env America. 2002. Background Levels of Polycyclic Aromatic Hydrocarbons in Northern California Surface Soil. Prepared for: Pacific Gas and Electric Company and U.S. Navy. June 7.
- Erler & Kalinowski, Inc. 2007. Technical Memorandum: Background Concentrations of Arsenic in Soil at Campus Bay, Campus Bay Site, Richmond, California. July 23.
- Lloyd, R.J.W, R.M. Moore, B.S. Woolf, and H.P. Stein. 1975. "Polychlorinated Biphenyls (PCBs), NIOSH Current Intelligence Bulletin 7." Available on-line at:
http://www.cdc.gov/Niosh/78127_7.html
- New World Environmental Inc. 2012. "Final Status Survey Report for UC Berkeley Capital Projects, Richmond Field Station, Buildings B102 and B110." November 18.
- New World Environmental, Inc. 2013. "Final Status Survey Report for Richmond Field Station Buildings 112, 113, 117 and 150." August 3.

- San Francisco Bay Regional Water Quality Control Board. (RWQCB). 1995. "Memorandum: In-Trench Reuse of Contaminated Trench Spoils during Utility Excavations." August 31.
- RWQCB. 2013. "May 2013 Update to Environmental Screening Levels." May. Available on-line at: http://www.waterboards.ca.gov/rwqcb2/water_issues/programs/esl.shtml.
- RWQCB. 2016. "Environmental Screening Levels, San Francisco Bay Regional Water Quality Control Board." February. Available on-line at: http://www.waterboards.ca.gov/sanfranciscobay/water_issues/programs/ESL/ESL%20Workbook_ESLs_Interim%20Final_22Feb16_Rev3_PDF.pdf
- Tetra Tech (Tetra Tech EM Inc. [1996-2012]; currently Tetra Tech, Inc.). 2008a. "Current Conditions Report, University of California, Berkeley, Richmond Field Station, Richmond California." November 21.
- Tetra Tech. 2008b. "Implementation Summary Report for a Time-Critical Removal Action at the Forest Products Laboratory Wood Treatment Laboratory." March 14.
- Tetra Tech. 2009. "Final Implementation Summary Report for a Time-Critical Removal Action at Two Subareas in the Western Transition Area, University of California Berkeley, Richmond Field Station, Richmond, California." May 26.
- Tetra Tech. 2011. "Final Phase I Groundwater Sampling Results Technical Memorandum, University of California, Berkeley, Richmond Field Station, Richmond, California." May 11.
- Tetra Tech. 2013. "Final Site Characterization Report, Proposed Richmond Bay Campus, University of California, Berkeley, Richmond Field Station." May 28.
- Tetra Tech. 2014. "Final Removal Action Workplan, Richmond Bay Campus, Richmond, California, Research, Education, and Support Area and Groundwater within the Former Richmond Field Station Site" July 18.
- Tetra Tech. 2015. "Final Ambient Metals Evaluation, Aluminum, Cobalt, Manganese, and Nickel, Technical Memorandum. Richmond Field Station Site, Berkeley Global Campus at Richmond Bay, University of California, Berkeley." December 11.
- Tetra Tech. 2016. "Final Phase IV Sampling Results Technical Memorandum, Richmond Field Station Site, Berkeley Global Campus at Richmond Bay, University of California, Berkeley." May 15.
- University of California (UC). 2014. "Richmond Bay Campus Long Range Development Plan." May 15.
- UC Berkeley. 2007. Pyrite Cinder-Containing Soil Management Procedures. Prepared by Greg Haet, Associate Director, University of California, Office of Environment, Health and Safety. May 16.


- UC Berkeley. 2014a. Letter from Dan Hibbing, Radiation Safety, UC Berkeley Environmental Health & Safety to Karl Hans, UC Berkeley. Richmond Field Station Bulb Investigation Letter Report. August 5.
- UC Berkeley. 2014b. Letter to Lynn Nakashima, DTSC, from Greg Haet, UC Berkeley. Pacific Earthquake and Engineering Research Excavation Report and Results, Richmond Field Station Site, Berkeley Global Campus. October 31.
- URS Corporation (URS). 1999. "Final Field Sampling and Analysis Plan and Tiered Risk Evaluation, University of California, Berkeley, Richmond Field Station." December 10.
- U.S. Environmental Protection Agency (EPA). 2005. Polychlorinated Biphenyl (PCB) Site Revitalization Guidance Under the Toxic Substances Control Act. November. Available on-line at: <http://www.epa.gov/osw/hazard/tsd/pcbs/pubs/pcb-guid3-06.pdf>

FIGURES

LEGEND

-  Property Boundary
134.0 acres
-  Natural Open Space
25.0 acres
-  Research, Education & Support
107.6 acres
-  Potential Road Alignment through Natural Open Space*
0.8 acres
-  Zone of Potential Road Alignment through Natural Open Space
-  Private Road: 1/3 UC Undivided Interest
0.6 acres
-  25' Buffer Zone
-  City of Richmond Realigned Regatta Boulevard

* NOTE: The potential road alignment is illustrative. A road with similar dimensions may be aligned differently but will fall within the Zone of Potential Road Alignment through Natural Open Space.

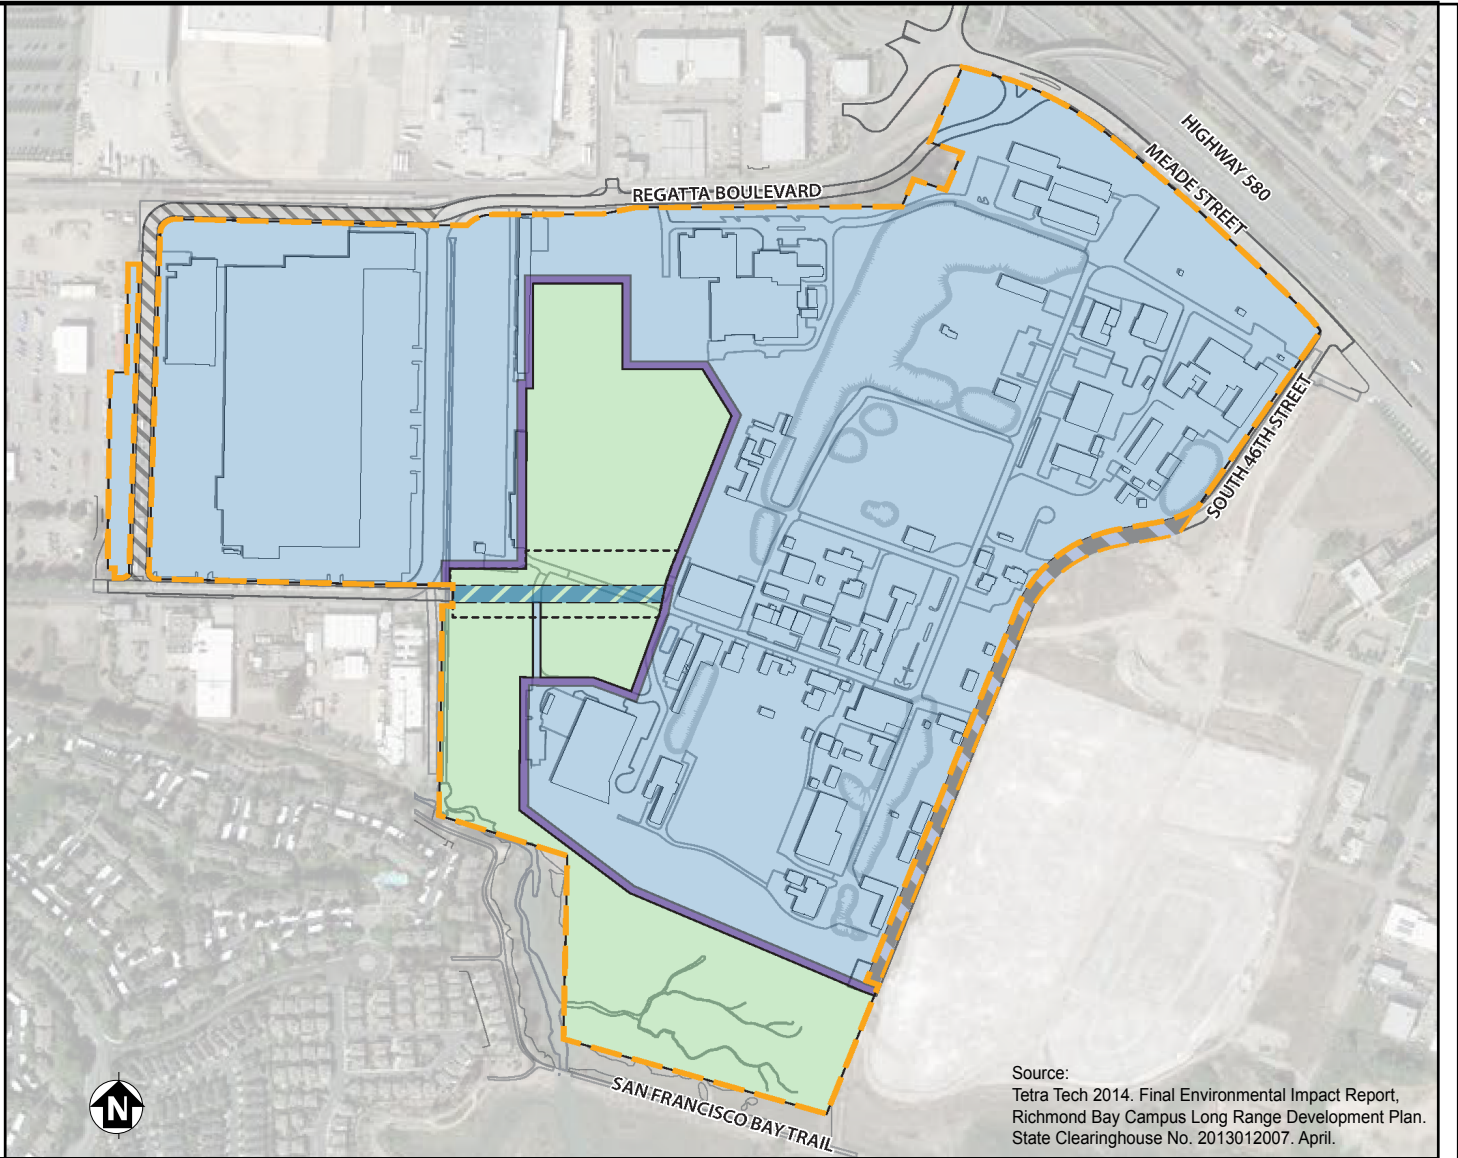


Source:
Tetra Tech 2014. Final Environmental Impact Report,
Richmond Bay Campus Long Range Development Plan.
State Clearinghouse No. 2013012007. April.



**Berkeley Global Campus at
Richmond Bay**

**FIGURE C-1
BERKELEY GLOBAL CAMPUS
AT RICHMOND BAY**

Soil Management Plan

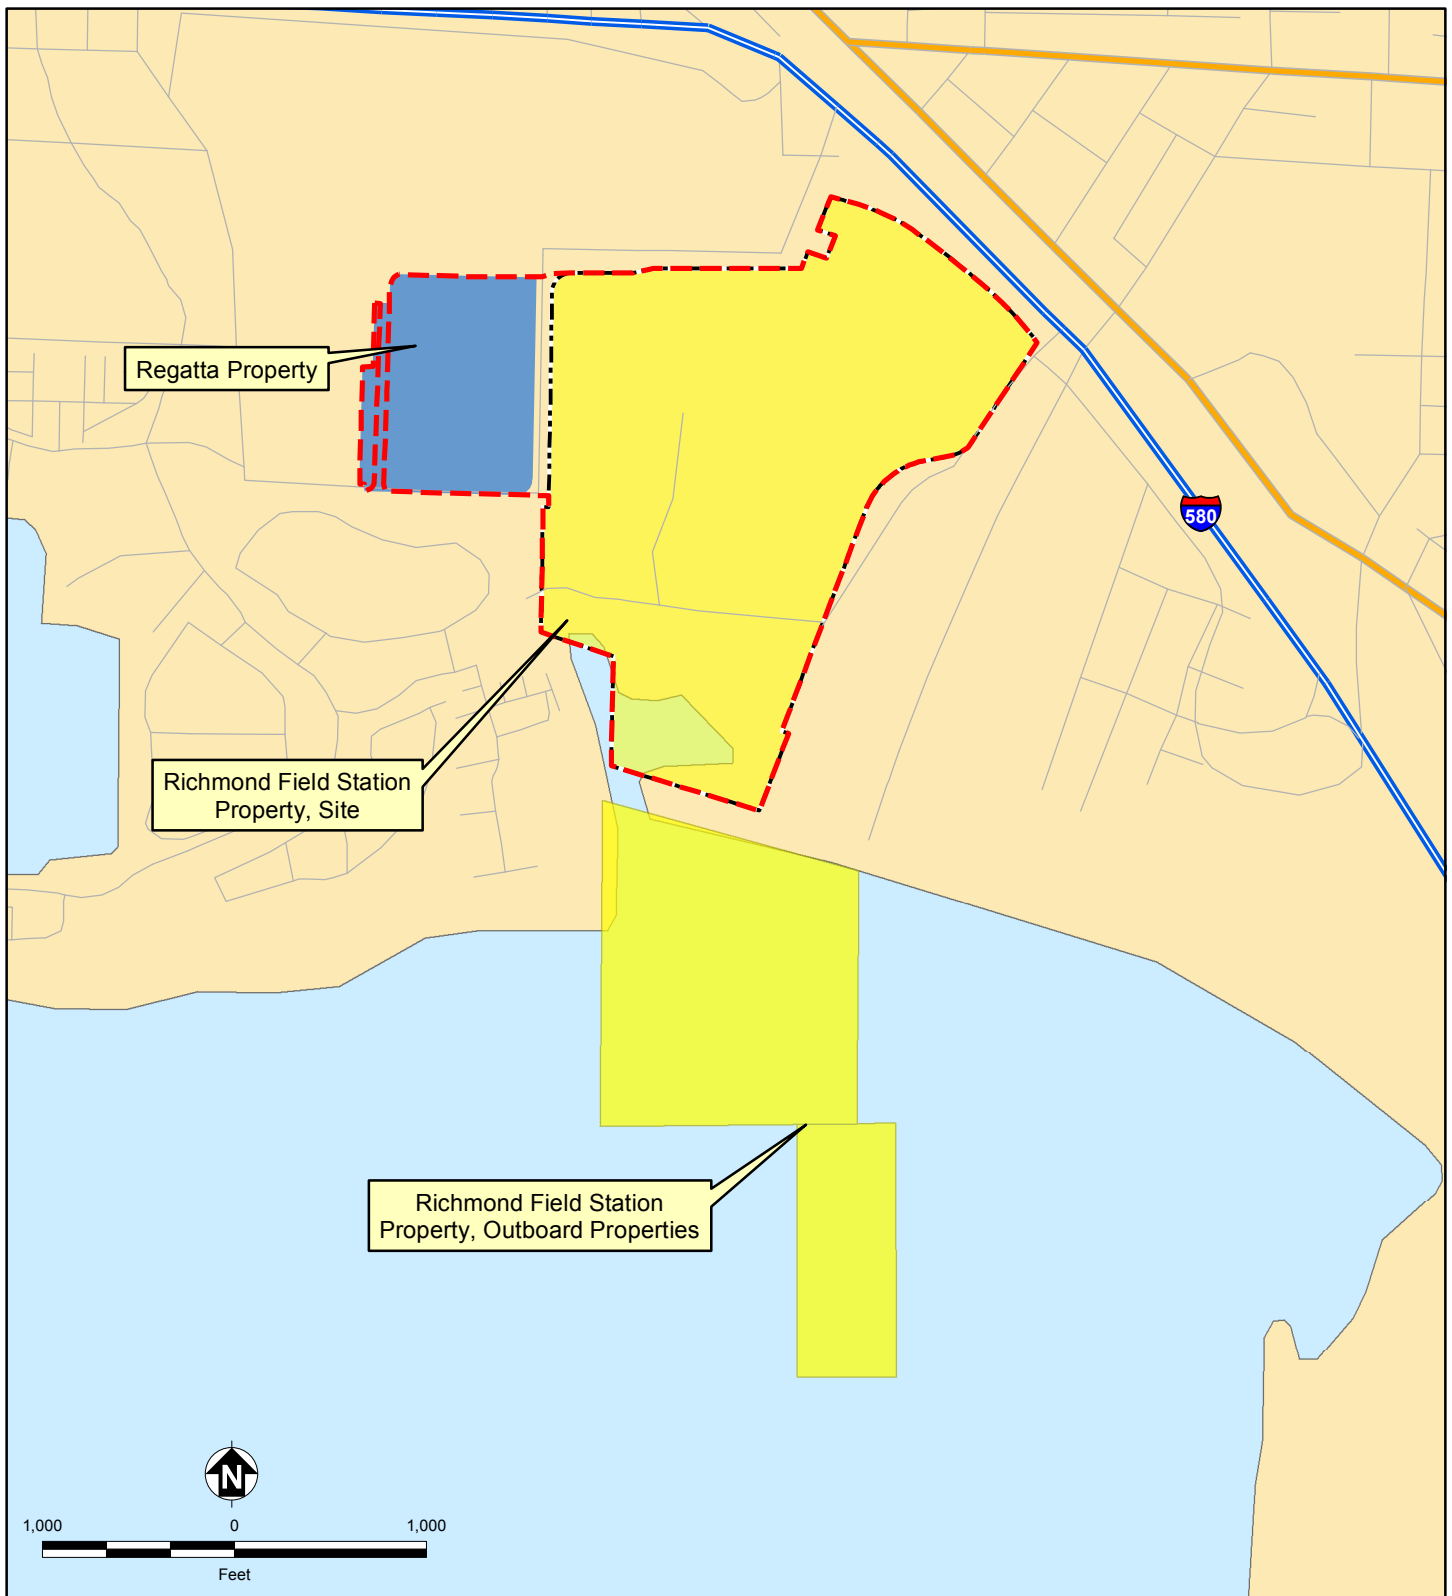

- Richmond Field Station Property
- Portion of RFS Property Subject to DTSC order, Defined as "Site"
- Regatta Property
- Berkeley Global Campus at Richmond Bay


Notes:
 DTSC Department of Toxic Substances Control
 RFS Richmond Field Station



Berkeley Global Campus at Richmond Bay

**FIGURE C-2
 UNIVERSITY OF CALIFORNIA
 PROPERTIES**

Soil Management Plan

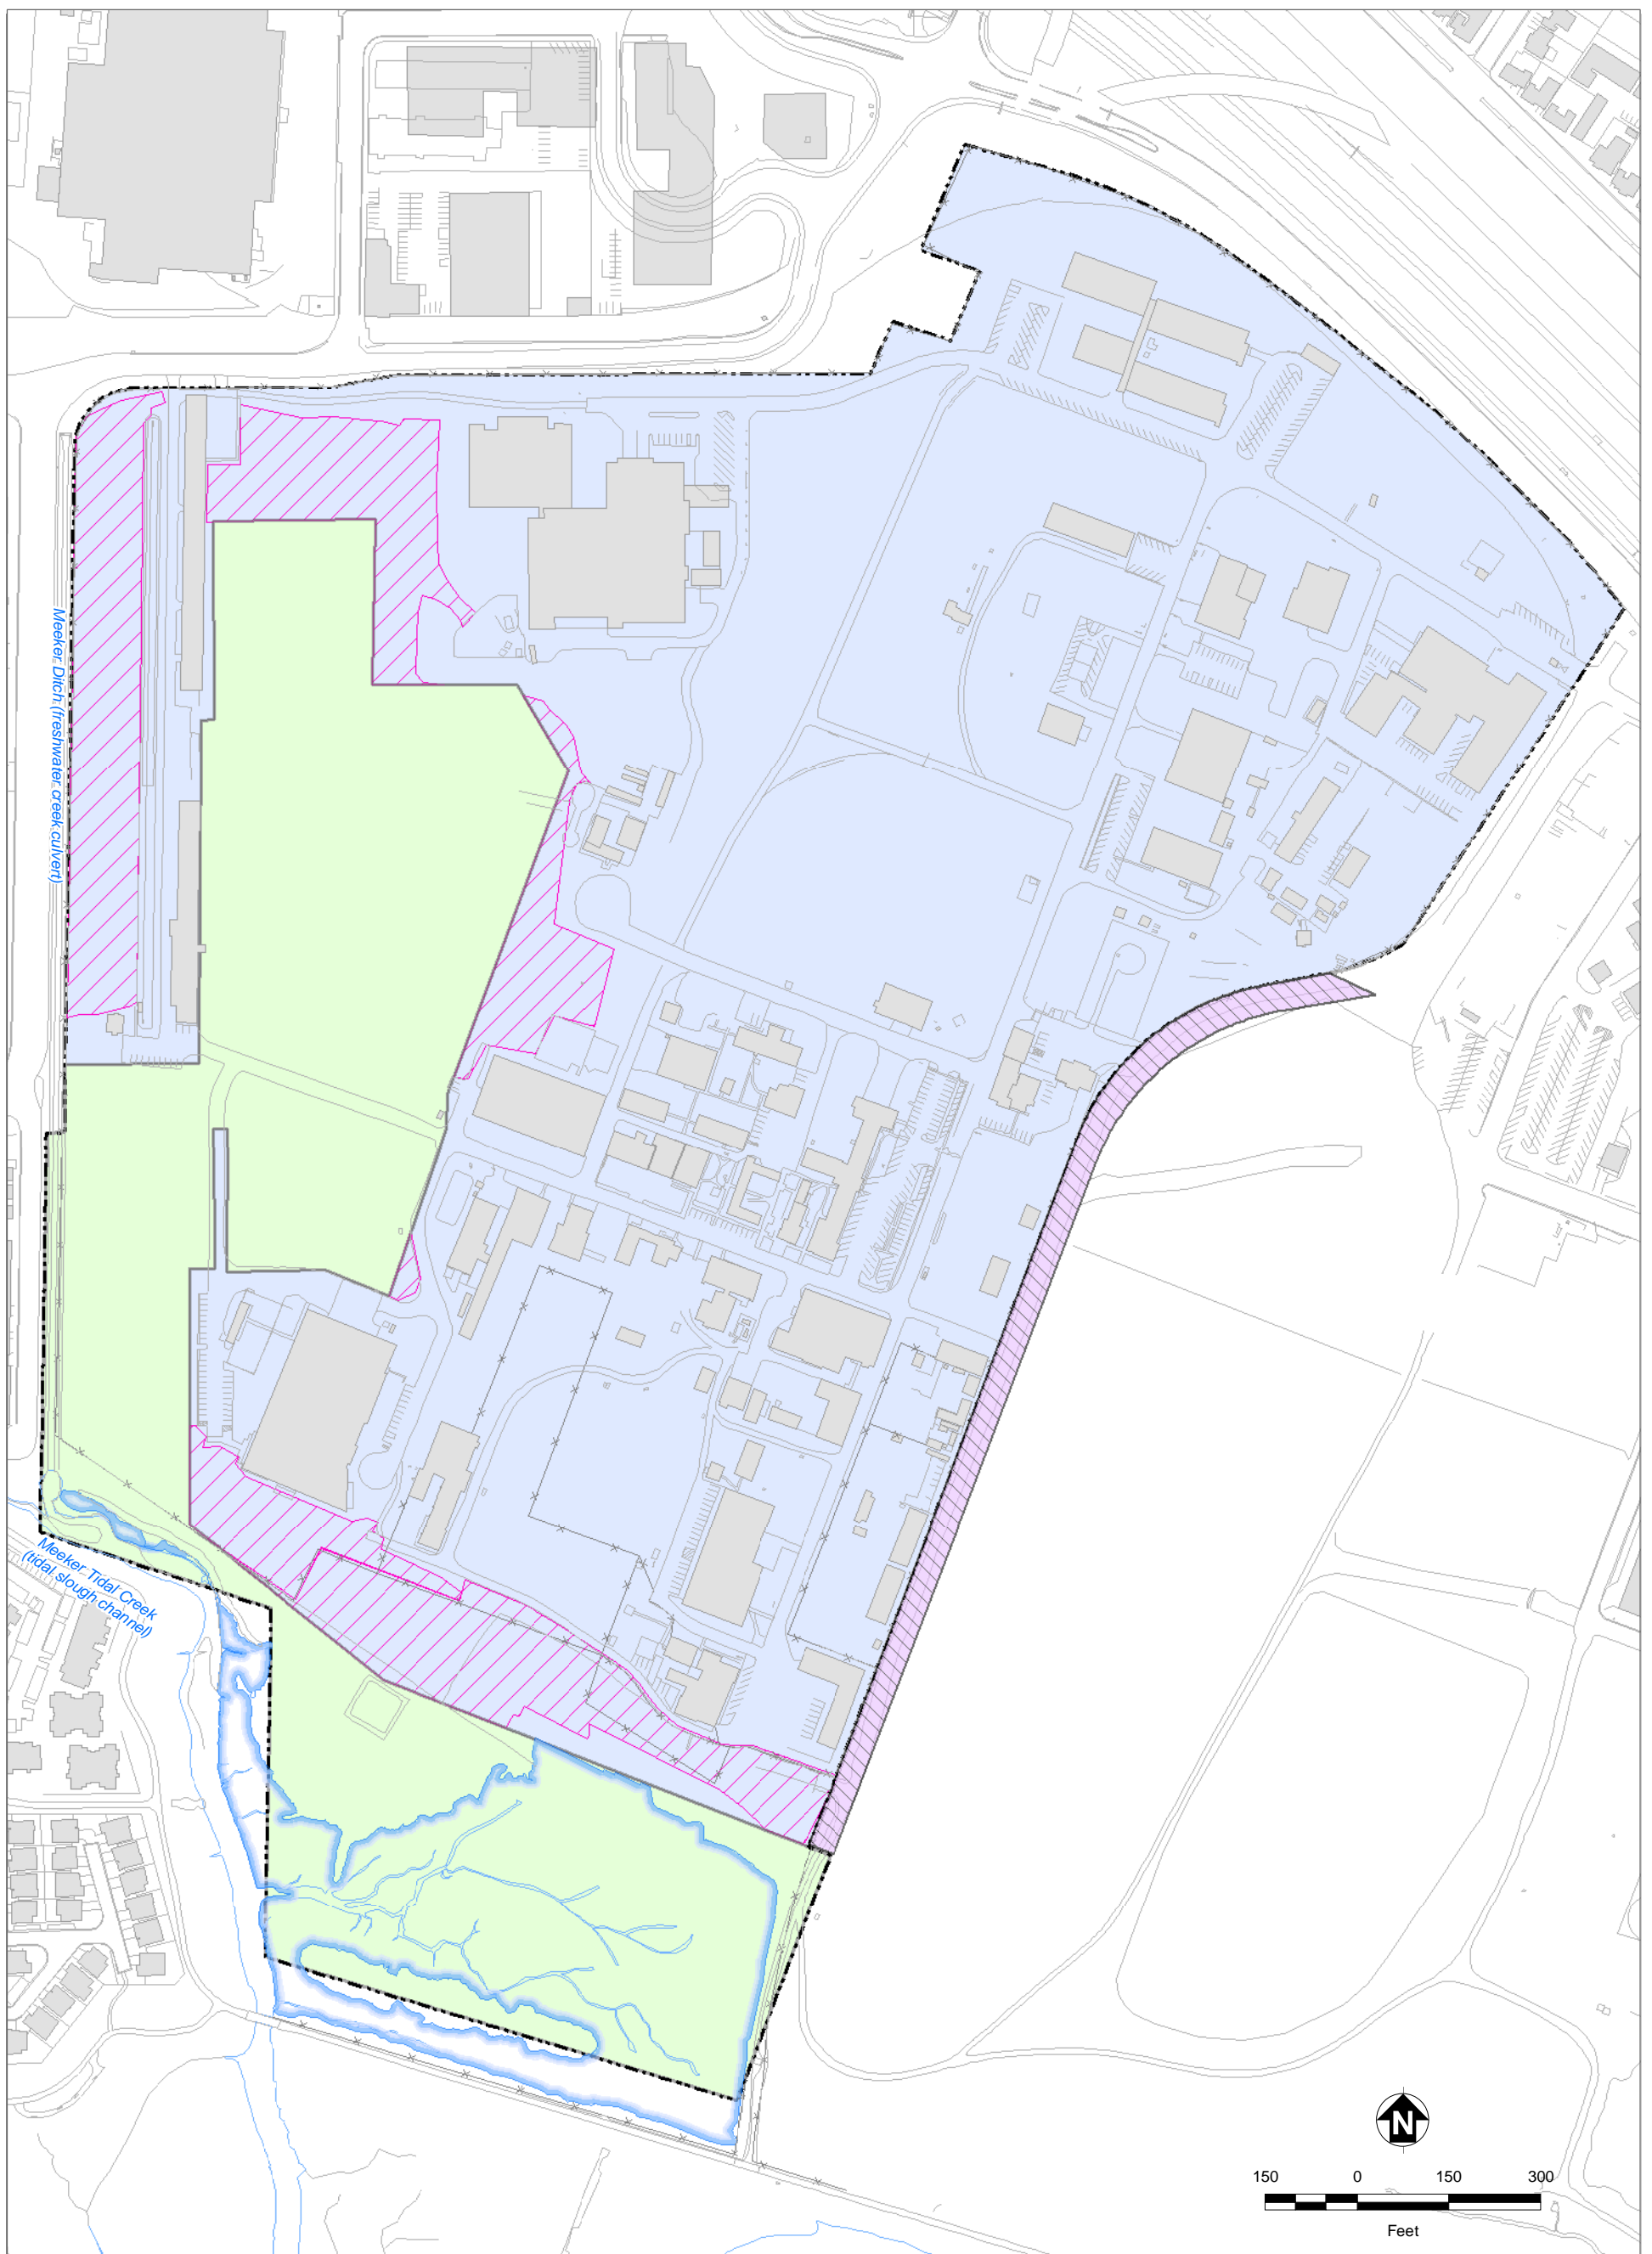

- Research, Education & Support Area
- Natural Open Space
- The portion of South 46th Street owned by UC and Zeneca under a 1/3 and 2/3 shared interest is subject to the RAW
- Habitat within RES Area
- Existing Building
- Portion of RFS Property Subject to DTSC order, Defined as "Site"
- Roads and Other Landscape Features
- Marsh Boundary


Note:
 DTSC Department of Toxic Substances Control
 RAW Removal Action Workplan
 RES Research, Education, & Support
 RFS Richmond Field Station
 UC University of California



Richmond Bay Campus

**FIGURE C-3
 RESEARCH, EDUCATION AND
 SUPPORT AREA AND
 NATURAL OPEN SPACE WITHIN
 SITE BOUNDARY**

Soil Management Plan

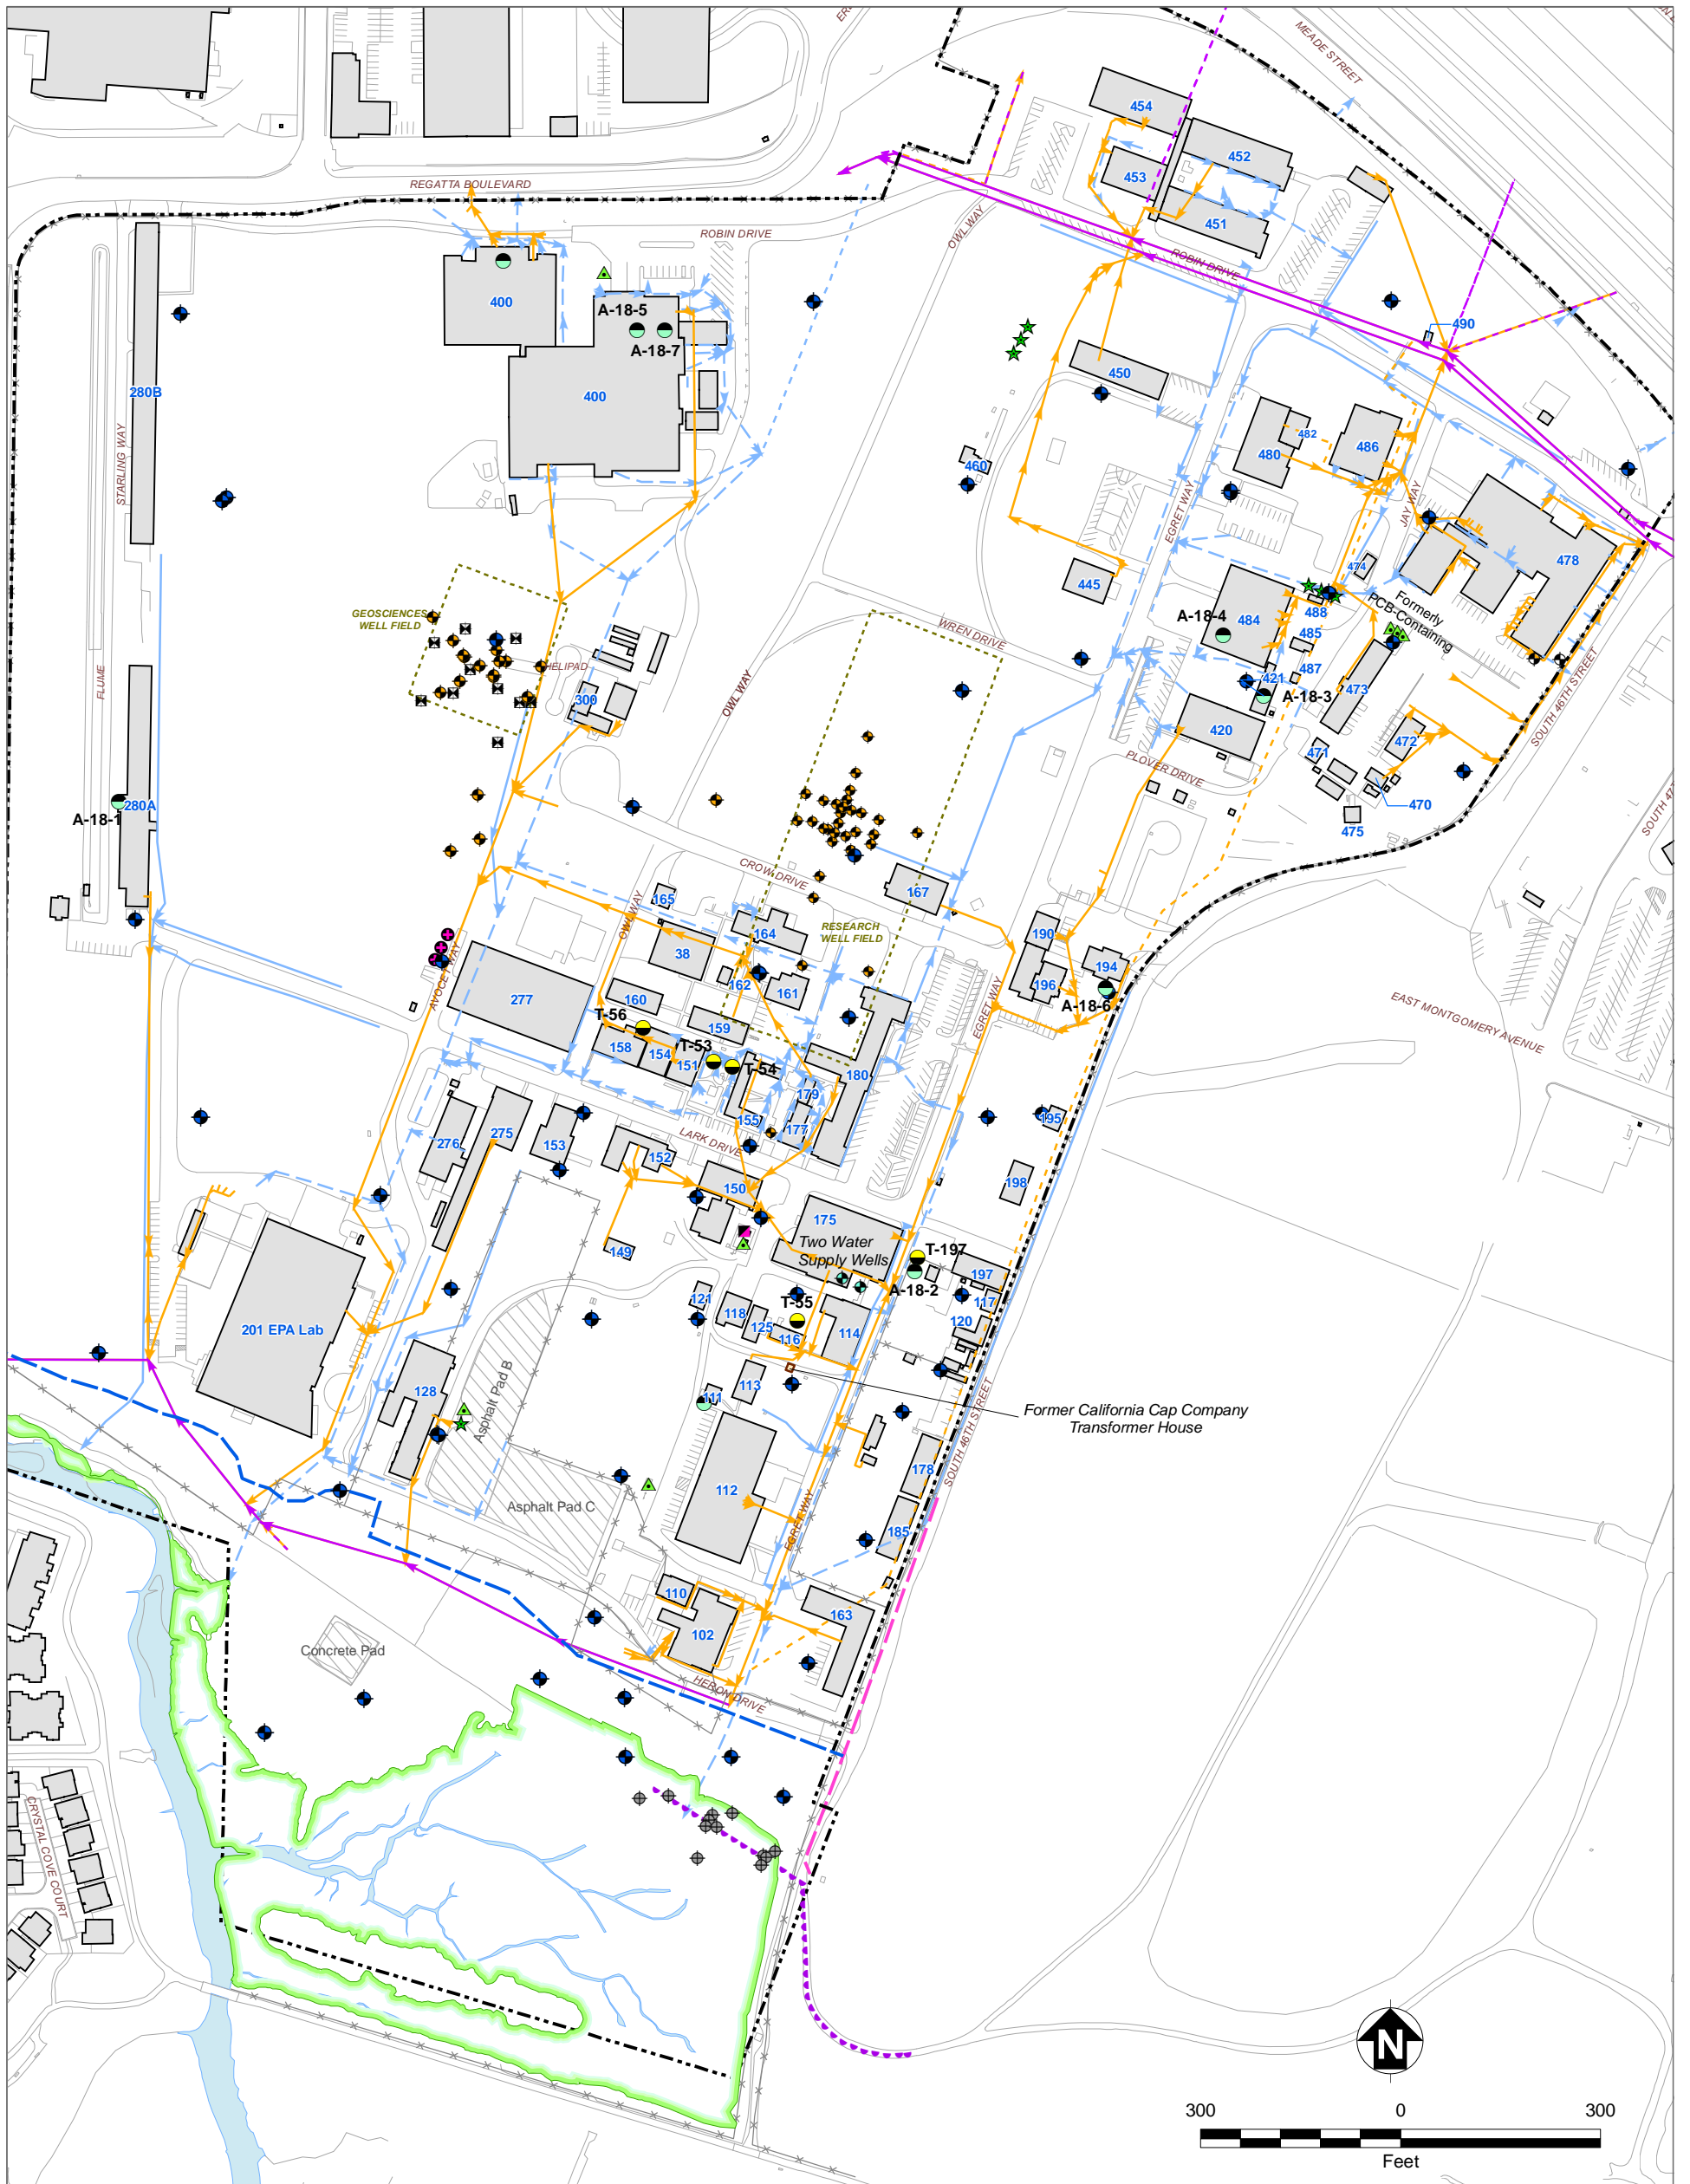


<ul style="list-style-type: none"> Existing Building (Building Numbers Shown in Blue) Marsh Boundary Surface Water Asphalt/Concrete Pads Well Field Boundary Portion of RFS Property Subject to DTSC order, Defined as "Site" Fenceline Biologically Active Permeable Barrier Wall Former Seawall Slurry Wall Aboveground Storage Tank (AST) Former Underground Storage Tank (UST) 	<ul style="list-style-type: none"> Open Well (Not in Use) Closed Well (Pressure Grouted) Open Piezometer Open Geosciences Well BAPB Wells on RFS Property Zeneca Wells on RFS Property <p>Transformer Locations:</p> <ul style="list-style-type: none"> Pad-Supported, Non PCB-Containing Pad-Supported, Former PCB-Containing (Removed) Pole-Mounted, Non PCB-Containing Pole-Mounted, Former PCB-Containing (Removed) 	<p>City Sanitary Sewer Lines:</p> <ul style="list-style-type: none"> Existing City of Richmond Sewer Abandoned City of Richmond Sewer Existing RFS Sewer Abandoned RFS Sewer <p>Storm Drain Lines:</p> <ul style="list-style-type: none"> Open Swale Underground Culvert Gutters Underground Culvert, Abandoned (Grouted at Manholes)
--	--	---

Berkeley Global Campus at Richmond Bay

**FIGURE C-4
PHYSICAL FEATURES**

Soil Management Plan

Note:
 BAPB Biologically Active Permeable Barrier
 DTSC Department of Toxic Substances Control
 EBRPD East Bay Regional Parks District
 EPA Environmental Protection Agency
 PCB Polychlorinated biphenyls
 RFS Richmond Field Station

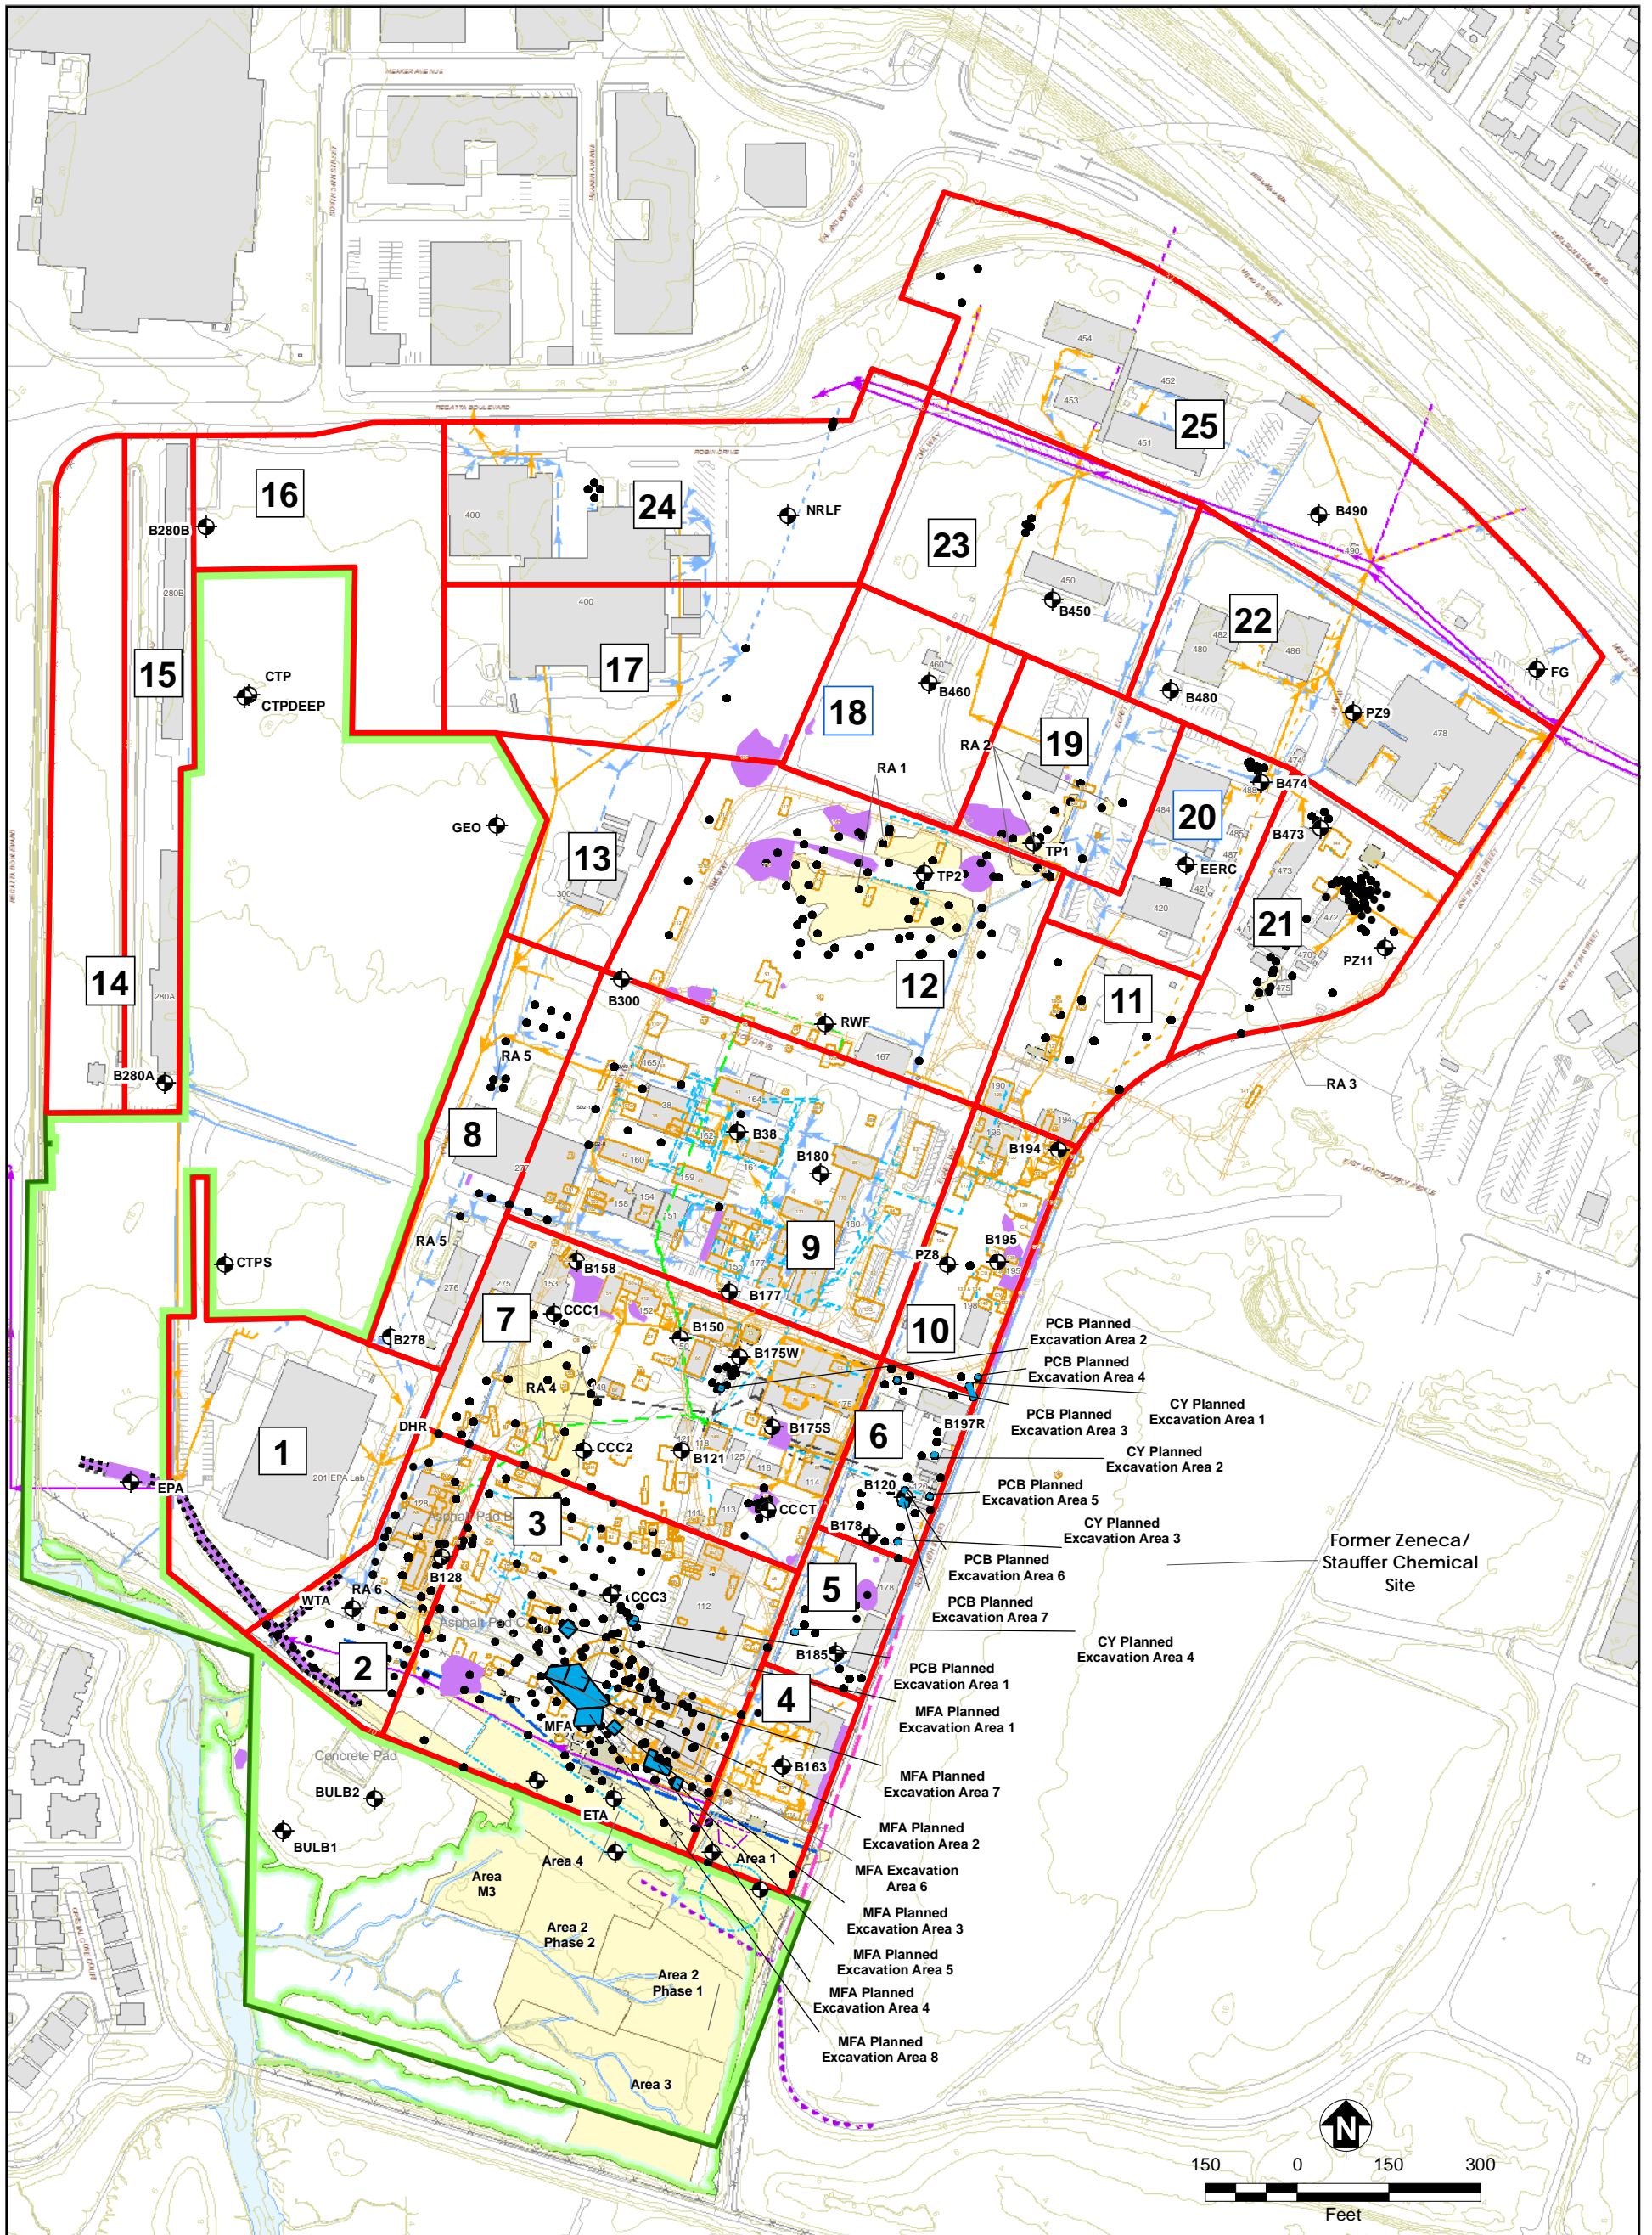

<ul style="list-style-type: none"> RES Area within the Site Boundary Natural Open Space Area Planned Excavation Areas Existing Building Removed or Relocated Building (RFS) Remediated Areas Surface Water Asphalt/Concrete Pad Marsh Boundary Known Pyrite Cinders Area Suspect Pyrite Cinders (Presence Not Verified) SMP Area Boundaries and identifiers Elevation Contour (US Survey Feet NAVD88) April 2008 - Source: Contra Costa County Former SERL Pond 	<ul style="list-style-type: none"> Roads or Other Landscape Feature Biologically Active Permeable Barrier Wall Former Seawall (Approximate) Slurry Wall Sanitary Sewer Lines: Existing City of Richmond Sewer Abandoned City of Richmond Sewer Existing RFS Sewer Abandoned RFS Sewer Storm Drain Lines: Open Swale Underground Culvert Gutters Underground Culvert, Abandoned (Grouted at Manholes) 	<ul style="list-style-type: none"> Former California Cap Company Facilities/Building Former Pacific Cartridge Company Building Former U.S. Briquette Company Building Former California Cap Company Tramway Former California Cap Company Utilities: Natural Gas Line Fuel Line Hydraulic Line Soil Sampling Location Piezometer Location
--	--	---

Notes: Only currently existing samples are shown on this figure. Samples removed through excavation are not shown here.


CY	Corporation Yard
MFA	Mercury Fulminate Area
PCB	Polychlorinated biphenyl
RES	Remediation Area
RA	Research, Education & Support
RFS	Richmond Field Station
SMP	Soil Management Plan
SERL	Sanitary Engineering Research Laboratory

Berkeley Global Campus at Richmond Bay

FIGURE C-5

SOIL MANAGEMENT PLAN AREAS

Soil Management Plan

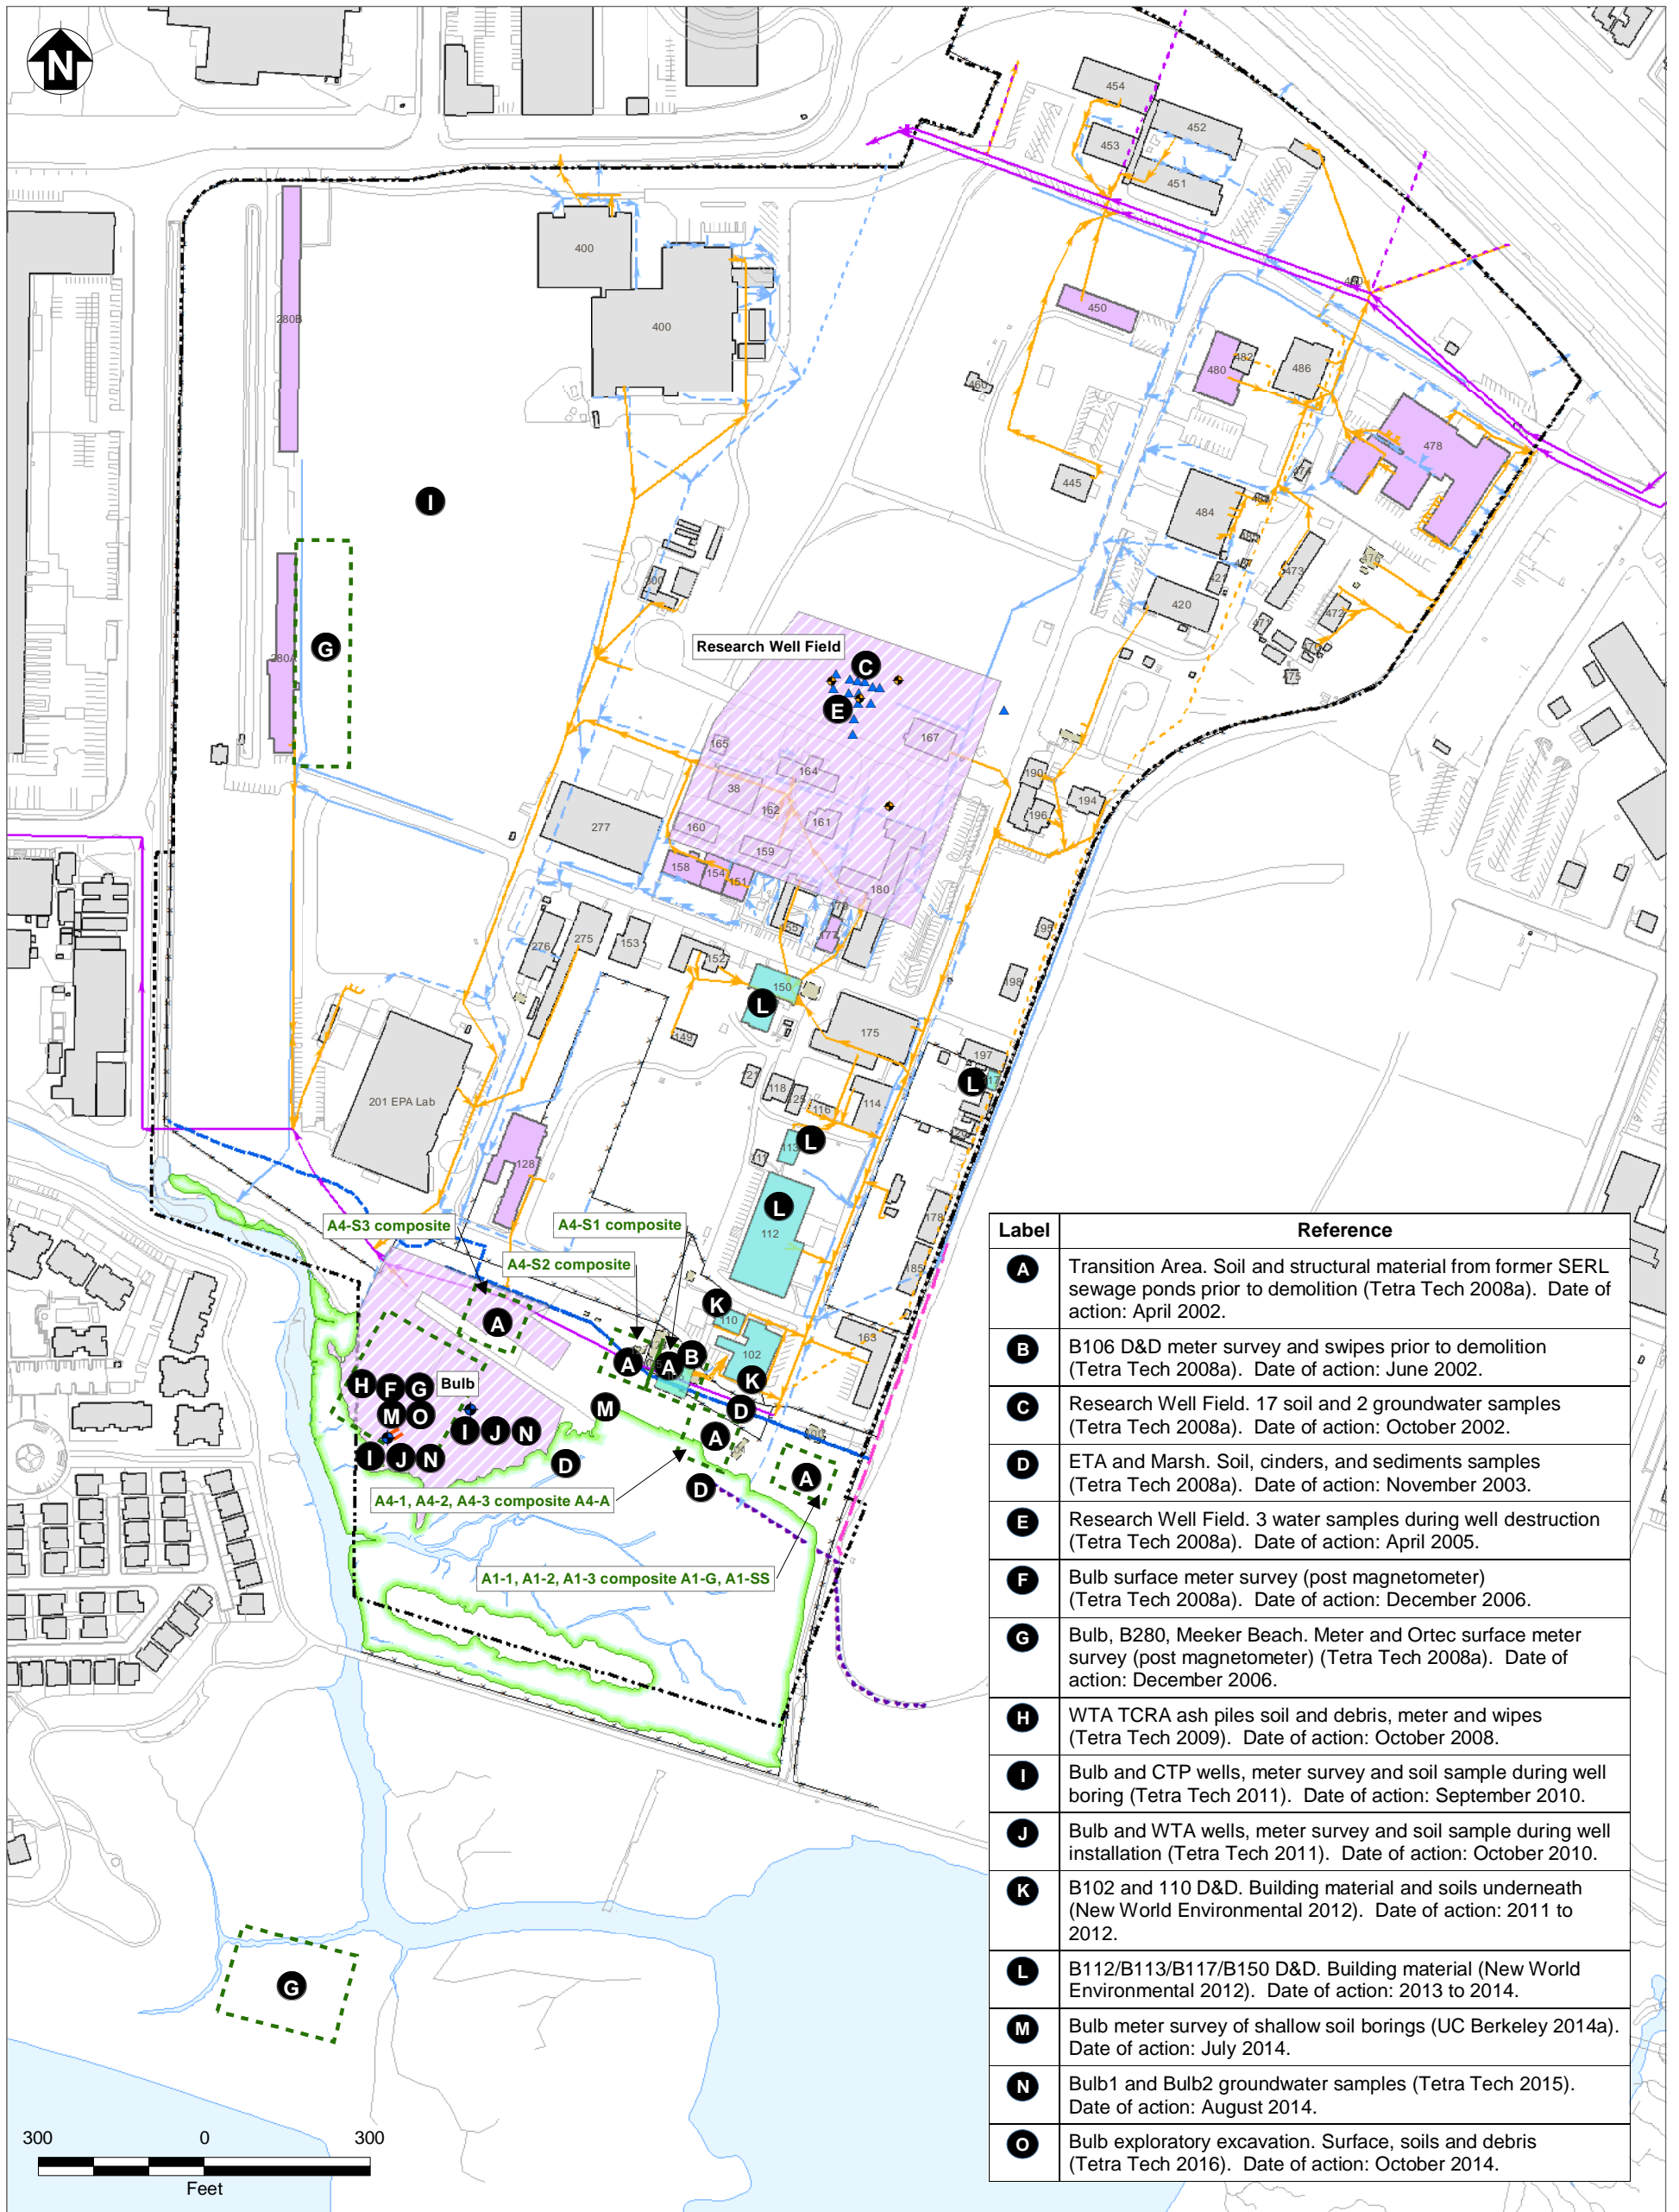

Label	Reference
A	Transition Area. Soil and structural material from former SERL sewage ponds prior to demolition (Tetra Tech 2008a). Date of action: April 2002.
B	B106 D&D meter survey and swipes prior to demolition (Tetra Tech 2008a). Date of action: June 2002.
C	Research Well Field. 17 soil and 2 groundwater samples (Tetra Tech 2008a). Date of action: October 2002.
D	ETA and Marsh. Soil, cinders, and sediments samples (Tetra Tech 2008a). Date of action: November 2003.
E	Research Well Field. 3 water samples during well destruction (Tetra Tech 2008a). Date of action: April 2005.
F	Bulb surface meter survey (post magnetometer) (Tetra Tech 2008a). Date of action: December 2006.
G	Bulb, B280, Meeker Beach. Meter and Ortec surface meter survey (post magnetometer) (Tetra Tech 2008a). Date of action: December 2006.
H	WTA TCRA ash piles soil and debris, meter and wipes (Tetra Tech 2009). Date of action: October 2008.
I	Bulb and CTP wells, meter survey and soil sample during well boring (Tetra Tech 2011). Date of action: September 2010.
J	Bulb and WTA wells, meter survey and soil sample during well installation (Tetra Tech 2011). Date of action: October 2010.
K	B102 and 110 D&D. Building material and soils underneath (New World Environmental 2012). Date of action: 2011 to 2012.
L	B112/B113/B117/B150 D&D. Building material (New World Environmental 2012). Date of action: 2013 to 2014.
M	Bulb meter survey of shallow soil borings (UC Berkeley 2014a). Date of action: July 2014.
N	Bulb1 and Bulb2 groundwater samples (Tetra Tech 2015). Date of action: August 2014.
O	Bulb exploratory excavation. Surface, soils and debris (Tetra Tech 2016). Date of action: October 2014.

Legend:

- Historic Area of Radiological Materials Use
- Suspected Use or Disposal - Exterior Locations
- Decontamination and Decommissioning Complete
- Exploratory Excavation Trenches
- Area of Radiological Survey or Sampling
- Discrete Radiological Sampling Location
- Closed Well Where Radiological Sampling Occured
- Indicates reference to investigation; see back of this figure for full list of report references
- Existing Piezometer
- Existing Building
- Removed or Relocated Building (RFS)
- Marsh Boundary
- Surface Water
- Richmond Field Station Site Boundary
- Road or Other Landscape Feature
- Biologically Active Permeable Barrier Wall
- Fenceline
- Former Seawall
- Slurry Wall
- Sanitary Sewer Lines:**
 - Existing City of Richmond Sewer
 - Abandoned City of Richmond Sewer
 - Existing RFS Sewer
 - Abandoned RFS Sewer
- Storm Drain Lines:**
 - Open Swale
 - Underground Culvert
 - Gutters
 - Underground Culvert, Abandoned (Grouted at Manholes)

Notes:



- All radiological reference documents are included in Section 7.0 References.
- Table C-4 provides additional radiological survey and sampling information.



Berkeley Global Campus at Richmond Bay

**FIGURE C-6
HISTORIC RADIOLOGIC USE
AND SAMPLING LOCATIONS**

Soil Management Plan

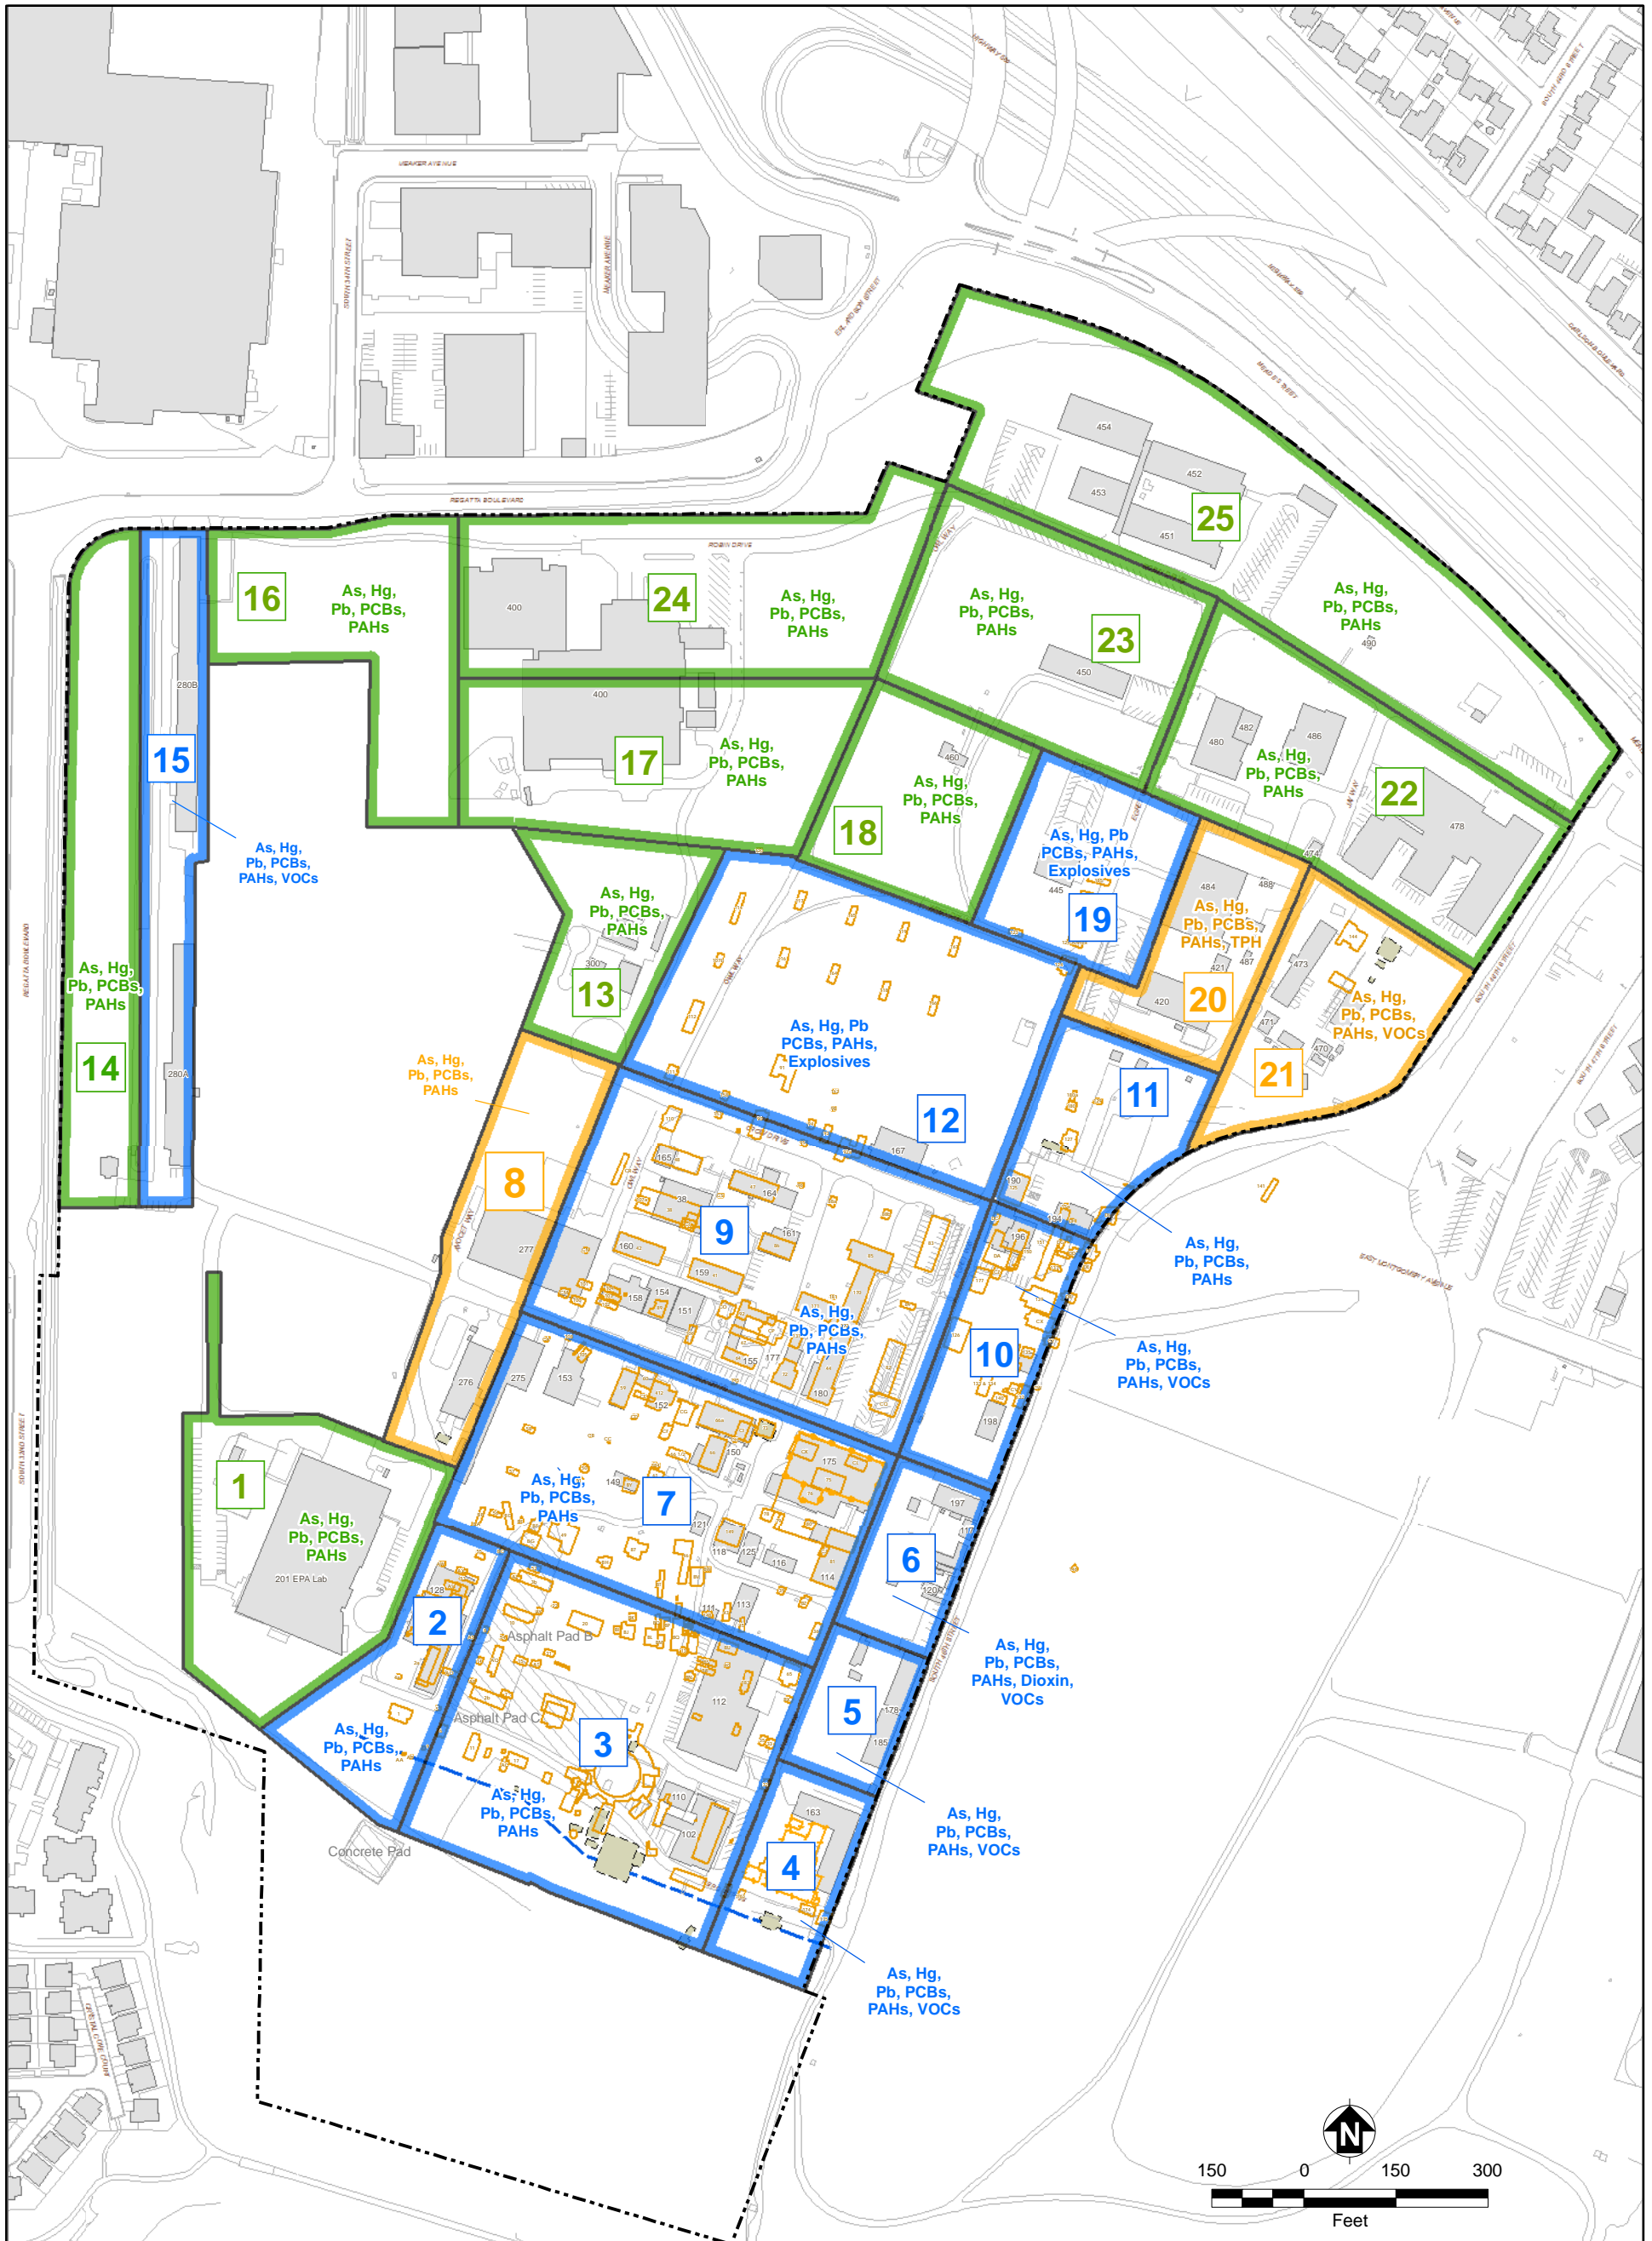

- Existing Building
 - Removed or Relocated Building
 - Asphalt/Concrete Pad
 - Former Seawall (Approximate)
 - Approximate Site Boundary
 - Roads or Other Landscape Feature
 - Former California Cap Company Facilities/Building
- SMP Area Boundaries and Identifiers with Density Protocol**
- Low Density Sampling Area: 125 foot grid spacing; one sample per 15,625 square feet.
 - Medium Density Sampling Area: 100 foot grid spacing; one sample per 10,000 square feet.
 - High Density Sampling Area: 75 foot grid spacing; one sample per 5,625 square feet.

- Notes:**
- As Arsenic
 - Hg Mercury
 - PAH Polycyclic aromatic hydrocarbons
 - Pb Lead
 - PCB Polychlorinated biphenyl
 - SMP Soil Management Plan
 - TPH Total petroleum hydrocarbons
 - VOC Volatile organic compound



Berkeley Global Campus at Richmond Bay

**FIGURE C-7
SOIL MANAGEMENT PLAN AREAS
SAMPLING DENSITIES AND
RECOMMENDED ANALYTES**
Soil Management Plan

TABLES

Table C-1: Category I and II Criteria

Chemical ³	Risk-Based Concentrations ^{1,2}				Other Criteria	Category I Criteria ⁴	Category II On-Site Management Criteria ⁵
	Commercial Worker	Construction Worker	Maintenance Worker	Off-Site Receptor (Inhalation)			
Metals							
Aluminum	100,000	20,300	100,000	6,860,000	Eliminated ⁶	--	--
Antimony	367	109	2,720	--	--	109	1,090
Arsenic	0.224	1.58	1.58	745	16 ⁷	16 ^{7,8}	16 ^{7,8}
Barium	100,000	2,110	52,600	686,000	--	2,110	21,100
Beryllium	1,760	29.0	128	1,330	--	29.0	290
Boron	100,000	33,600	100,000	27,400,000	--	33,600	100,000
Cadmium	1,000	68.1	73.0	762	--	68.1	681
Chromium	100,000	100,000	100,000	--	--	100,000	100,000
Cobalt	273	19.9	34.1	356	73 ⁶	73.0	199
Copper	36,700	10,900	100,000	--	--	10,900	100,000
Iron	100,000	100,000	100,000	--	--	100,000	100,000
Lead ^{8,9}	320	320	320	--	320 ^{8,9}	320 ^{8,9}	800 ^{8,9}
Manganese	20,500	212	5,300	68,600	5,900 ⁶	5,900	5,900
Mercury ¹⁰	275	77.0	1,920	412,000	--	77.0	275
Molybdenum	4,590	1,360	34,000	--	--	1,360	13,600
Nickel	14,900	60.6	1,180	12,300	280 ⁶	280.0	606
Selenium	4,590	1,340	33,500	27,400,000	--	1,340	13,400
Silver	4,590	1,360	34,000	--	--	1,360	13,600
Thallium	9.17	2.72	68.0	--	--	2.72	27.2
Vanadium	4,590	1,360	34,000	--	--	1,360	13,600
Zinc	100,000	81,600	100,000	--	--	81,600	100,000
VOCs							
1,2-Dichloropropane	4.41	71.0	83.7	0.993	--	0.993	9.93
Acetone	100,000	100,000	100,000	475,000	--	100,000	100,000
Benzene	1.44	27.9	27.9	0.320	--	0.320	3.20
Ethylbenzene	24	393	393	5.94	--	5.94	59.40
m,p-Xylene	2,510	2,350	58,700	614	--	614	6,140
o-Xylene	2,950	2,730	68,100	725	--	725	7,250
Toluene	5,230	3,830	95,700	1,440	--	1,440	14,400
Trichloroethylene	5.72	15.8	93.7	1.03	--	1.03	10.3

Table C-1: Category I and II Criteria

Chemical ³	Risk-Based Concentrations ^{1,2}				Other Criteria	Category I Criteria ⁴	Category II On-Site Management Criteria ⁵
	Commercial Worker	Construction Worker	Maintenance Worker	Off-Site Receptor (Inhalation)			
SVOCs							
BAP (EQ) ¹¹	0.145	0.963	0.963	1,150	0.4 ¹²	0.4 ¹²	1.45
1-Methylnaphthalene	36.4	243	243	--	--	36.4	364
2-Methylnaphthalene	1,510	403	10,100	--	--	403	4,030
4-Methylphenol	47,800	13,000	100,000	823,000,000	--	13,000	100,000
Acenaphthene	22,600	6,050	100,000	--	--	6,050	60,500
Acenaphthylene	22,600	6,050	100,000	--	--	6,050	60,500
Anthracene	100,000	30,200	100,000	--	--	30,200	100,000
Benzo(a)anthracene	0.880	5.87	5.87	11,500	--	0.880	8.80
Benzo(a)pyrene	0.145	0.963	0.963	1,150	--	0.145	1.45
Benzo(b)fluoranthene	0.88	5.87	5.87	11,500	--	0.880	8.80
Benzo(g,h,i)perylene	11,300	3,020	75,600	--	--	3,020	30,200
Benzo(k)fluoranthene	0.880	5.87	5.87	11,500	--	0.880	8.80
bis(2-Ethylhexyl)phthalate	95.5	647	647	1,330,000	--	95.5	955
Chrysene	8.80	58.7	58.7	115,000	--	8.80	88.0
Dibenz(a,h)anthracene	0.145	0.963	0.963	2,670	--	0.145	1.45
di-n-Butylphthalate	47,800	13,000	100,000	--	--	13,000	100,000
Fluoranthene	15,100	4,030	100,000	--	--	4,030	40,300
Fluorene	15,100	4,030	100,000	--	--	4,030	40,300
Indeno(1,2,3-cd)pyrene	0.880	5.87	5.87	11,500	--	0.880	8.80
Naphthalene	18.0	450	450	3.57	--	3.57	35.7
Phenanthrene	15,100	4,030	100,000	--	--	4,030	40,300
Pyrene	11,300	3,020	75,600	--	--	3,020	30,200
PCBs							
Aroclor-1242	0.528	3.50	3.50	5,620	1 ¹³	1 ¹³	1 ¹³
Aroclor-1248	0.528	3.50	3.50	5,620	1 ¹³	1 ¹³	1 ¹³
Aroclor-1254	0.528	2.02	3.50	5,620	1 ¹³	1 ¹³	1 ¹³
Aroclor-1260	0.528	3.50	3.50	5,620	1 ¹³	1 ¹³	1 ¹³
Total PCBs ¹⁴	--	--	--	--	1 ¹³	1 ¹³	1 ¹³
Pesticides							
4,4'-DDD	7.59	52.8	52.8	46,400	--	7.59	75.9
4,4'-DDE	5.36	37.3	37.3	33,000	--	5.36	53.6
4,4'-DDT	5.36	37.3	37.3	33,000	--	5.36	53.6

Table C-1: Category I and II Criteria

Chemical ³	Risk-Based Concentrations ^{1,2}				Other Criteria	Category I Criteria ⁴	Category II On-Site Management Criteria ⁵
	Commercial Worker	Construction Worker	Maintenance Worker	Off-Site Receptor (Inhalation)			
Pesticides (continued)							
Aldrin	0.107	0.745	0.745	654	--	0.107	1.07
alpha-BHC	0.289	2.01	2.01	1,780	--	0.289	2.89
alpha-Chlordane	1.40	9.76	9.76	9,420	--	1.40	14.0
beta-BHC	1.01	7.04	7.04	6,040	--	1.01	10.1
Carbazole	145	934	934	291,000	--	145	1,450
Chlordane	1.40	9.76	9.76	9,420	--	1.40	14.0
delta-BHC	0.289	2.01	2.01	1,780	--	0.289	2.89
Dieldrin	0.114	0.792	0.792	696	--	0.114	1.14
Endosulfan I	3,910	1,100	27,500	--	--	1,100	11,000
Endosulfan II	3,910	1,100	27,500	--	--	1,100	11,000
Endosulfan sulfate	3,910	1,100	27,500	--	--	1,100	11,000
Endrin	195	54.9	1,370	--	--	54.9	549
Endrin aldehyde	195	54.9	1,370	--	--	54.9	549
gamma-BHC (Lindane)	1.66	11.5	11.5	10,300	--	1.66	16.6
gamma-Chlordane	1.40	9.76	9.76	9,420	--	1.40	14.0
Heptachlor	0.405	2.82	2.82	2,460	--	0.405	4.05
Heptachlor epoxide	0.200	1.39	1.39	1,230	--	0.200	2.00
Mirex	0.101	0.704	0.704	628	--	0.101	1.01
Pentachlorophenol	1.86	12.2	12.2	628,000	--	1.86	18.6
Dioxin							
Dioxin TEQ ¹⁵	0.0000164	0.000116	0.000116	0.0843	--	0.0000164	0.000164
Explosives							
HMX	23,900	6,500	100,000	--	--	6,500	65,000
TPH							
Diesel range organics	--	--	--	--	880 ¹⁶	880 ¹⁶	880 ¹⁶
Gasoline range organics	--	--	--	--	2,800 ¹⁶	2,800 ¹⁶	2,800 ¹⁶
Motor oil range organics	--	--	--	--	32,000 ¹⁶	32,000 ¹⁶	32,000 ¹⁶

Notes:
All values are in mg/kg.

Table C-1: Category I and II Criteria

Notes (continued):

1	Risk-based concentrations are calculated in Appendix C of the Site Characterization Report (Tetra Tech 2013a). Risk-based concentrations are shown with 3 significant figures, except where the default value of 100,000 mg/kg applies (where calculated value exceeds 100,000 mg/kg). Risk-based concentrations shown are the minimum values between the cancer and noncancer multi-pathway risk-based concentrations. For the off-site receptor, the values shown are the minimum values between the cancer and noncancer inhalation pathway risk-based concentrations calculated for the unrestricted use scenario.		
2	Bold values indicate the lowest of the risk-based concentrations for all potential future receptors.		
3	All chemicals detected at the site are included in this table. If a chemical is detected in the future that is not included in the table, risk-based concentrations will be calculated for it, and DTSC will be consulted.		
4	Category I criteria are based on the lowest of the calculated risk-based concentrations, unless background, ambient, or TSCA criterion are available, in which case the alternate values are selected and noted within this table. Category I criteria for TPH constituents are based on the RWQCB ESL.		
5	Category II criteria are based on 10 times the Category I criteria, unless otherwise noted. In cases where 10 times the Category I criteria is greater than 100,000 mg/kg, the default value of 100,000 mg/kg is used.		
6	Screening levels for cobalt, manganese, and nickel were updated, and aluminum was eliminated as a chemical of concern, based on the Final Ambient Metals Evaluation, Aluminum, Cobalt, Manganese, and Nickel (Tetra Tech 2015).		
7	The background level for arsenic (16 mg/kg) was established for the RFS Site as approved within the Final Removal Action Workplan (Tetra Tech 2014). The arsenic criteria is a not to exceed value, except in cases where arsenic is associated with cinders in soil (see note 8).		
8	If lead or arsenic is associated with cinders, manage on site per Section 5.2.3 of the SMP. If not associated with cinders, investigate further, determine if source is present, and dispose of off-site.		
9	A risk-based concentration was not calculated for lead. Rather, the industrial CHHSL of 320 mg/kg (Cal/EPA OEHHA 2009) was used for the commercial, construction, and maintenance worker scenarios. The Category II lead value is based on industrial RSL from EPA (2012).		
10	The toxicity criteria for mercuric chloride was used as a surrogate for mercury to calculate the risk-based concentration.		
11	The toxicity criteria for benzo(a)pyrene was used as a surrogate for BAP (EQ) to calculate the risk-based concentration.		
12	The ambient level for BAP (EQ) (0.4 mg/kg) is based on the 95 UCL concentration of the ambient dataset for BaP (EQ) in surface soils in Northern California (DTSC 2009; Environ Corporation and others 2002).		
13	The other criterion is based on the TSCA High Occupancy, no further conditions threshold criterion for total PCBs from EPA (2005). The TSCA criterion is a not-to-exceed value.		
14	PCB COCs include Aroclor-1248, Aroclor-1254, and Aroclor-1260. The receptor-specific risk-based concentration for total PCBs is the sum of the individual risk-based concentrations for the three COCs. The TSCA criteria for Aroclors of 1 mg/kg is applicable for total PCBs (the sum of all detected individual Aroclors in a particular sample).		
15	The toxicity criteria for 2,3,7,8-TCDD was used as a surrogate for Dioxin TEQ to calculate the risk-based concentration.		
16	Criteria for TPH constituents are based on the RWQCB Direct Exposure Soil Screening Levels for Commercial/Industrial Shallow Soil Exposure or Construction Worker (Table S-1) or Leaching to Groundwater Nondrinking Water (Table S-2) (RWQCB 2016).		
--	Not applicable	DDT	Dichlorodiphenyltrichloroethane
95 UCL	95th percentile Upper Confidence Limit of the arithmetic mean	DTSC	California Department of Toxic Substances Control
BAP (EQ)	Benzo(a)pyrene equivalent	EPA	U.S. Environmental Protection Agency
BHC	Hexachlorocyclohexane	HMX	Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine
Cal/EPA	California Environmental Protection Agency	mg/kg	Milligrams per kilogram
CHHSL	California human health screening level	OEHHA	Office of Environmental Health Hazard Assessment
COC	Chemical of concern	PCB	Polychlorinated biphenyl
DDD	Dichlorodiphenyldichloroethane	RBC	Risk-based concentration
DDE	Dichlorodiphenyldichloroethylene	RSL	Regional Screening Level

Table C-1: Category I and II Criteria

Notes (continued):

RWQCB	California Regional Water Quality Control Board	TEQ	Toxic equivalency quotient
SMP	Soil management plan	TPH	Total petroleum hydrocarbons
SVOC	Semivolatile organic compound	TSCA	Toxic Substances Control Act
TCDD	Tetrachlorodibenzo-p-dioxin	VOC	Volatile organic compound

References:

- Cal/EPA OEHHA. 2009. "Revised California Human Health Screening Levels for Lead." Integrated Risk Assessment Branch, OEHHA, Cal/EPA. September.
- DTSC. 2009. Use of the Northern and Southern California Polynuclear Aromatic Hydrocarbon (PAH) Studies in the Manufactured Gas Plant Site Cleanup Process. July.
- Environ Corporation, Entrix, IRIS Environmental, and Env America. 2002. Background Levels of Polycyclic Aromatic Hydrocarbons in Northern California Surface Soil. Prepared for: Pacific Gas and Electric Company and U.S. Navy. June 7.
- EPA. 2005. PCB Site Revitalization Guidance Under the Toxic Substances Control Act. November. Available online at: <http://www.epa.gov/osw/hazard/tsd/pcbs/pubs/pcb-guid3-06.pdf>.
- EPA. 2012. "Regional Screening Levels." Screening Levels for Chemical Contaminants. November.
- RWQCB. 2016. "February 2016 Update to Environmental Screening Levels." February. Available on-line at: http://www.waterboards.ca.gov/rwqcb2/water_issues/programs/esl.shtml.
- Tetra Tech. 2013. Site Characterization Report, Research, Education, and Support Area and Groundwater within the Richmond Field Station Site. May 28.
- Tetra Tech. 2014. Final Removal Action Workplan, Research, Education, and Support Area and Groundwater within the Richmond Field Station Site. July 18.
- Tetra Tech. 2015. Final Ambient Metals Evaluation, Aluminum, Cobalt, Manganese, and Nickel, Technical Memorandum. December 11.

Table C-2: Summary of SMP Areas and Historical Activities

SMP Area	Historical Activities	UC Berkeley Activities ¹	Previous Cleanups ²	Depth of Completed Cleanup (ft bgs)	COC of Completed Cleanup	Report Reference for Cleanup	Known Pyrite Cinders?	Commercial Vapor Intrusion RBC Exceedance in GW
1	--	--	--	--	--	--	Y	N
2	CCC, Shell Manufacturing, Pyrite Cinder Disposal	B128	Area 4 - Phase 2 RA 6 (AOC U6) - Phase 3	1 - 1.5 ³ 2 - 5	Pyrite Cinders, Hg Hg, PCBs	URS 2004 URS 2005	Y	N
3	CCC, MFA, Pyrite Cinder Disposal	B102, B112	Area 4 - Phase 2 RA 4 (AOC U4) - Phase 3 RA 6 (AOC U6) - Phase 3	1 - 5 ³ 1 2 - 5	Pyrite Cinders, Hg As, Cr, Cu, Pb, Hg Hg, PCBs	URS 2004 URS 2005	Y	N
4	CCC, Briquette, Pyrite Cinder Disposal	B163	Area 1 - Phase 1	11	Pyrite Cinders, Hg	URS 2003b	N	N
5	CCC	--	--	--	--	--	Y	Y ⁴
6	CCC	B120 chemical and petroleum product storage, maintenance equipment storage, incinerator, UST (removed)	--	--	--	--	Y	Y ⁵
7	CCC, Pacific Cartridge Company	B118, B125, B275, UST (removed)	RA 4 (AOC U4) - Phase 3	1	As, Cr, Cu, Pb, Hg	URS 2005	Y	N
8	--	B276, B277	RA 5 (AOC U8) - Phase 3	2	PCBs	URS 2005	N	N
9	CCC	B151, B158, B165, B277, UST (Removed)	--	--	--	--	N	N
10	CCC	AST	--	--	--	--	Y	N
11	CCC	--	--	--	--	--	N	N
12	CCC, Explosives Storage Area	B167	RA 1 (AOC U1) - Phase 3 RA 2 (AOC U2) - Phase 3	1 1 - 3 ⁶	As, Cu, Pb As, Cu	URS 2005	Y	N
13	--	B300	--	--	--	--	N	N
14	--	--	--	--	--	--	N	N
15	--	B280A, B280B, AST	--	--	--	--	N	Y ⁵
16	--	--	--	--	--	--	N	N
17	--	--	--	--	--	--	Y	N
18	--	B460	--	--	--	--	N	N
19	CCC, Explosives Test Pit	--	RA 2 (AOC U2) - Phase 3	1 - 3 ⁶	As, Cu	URS 2005	Y	N
20	--	B420, B421, B484, AST, B421 hydraulic oil spill	--	--	--	--	N	N
21	--	FPL WTL (B470-B473)	RA 3 (AOC U3) - Phase 3 FPL WTL TCRA	1 2 - 3.5	As, Cu As	URS 2005 Tetra Tech 2008c	N	Y ⁴
22	--	FPL (B474, B478, B480)	--	--	--	--	N	N
23	--	B450, AST	--	--	--	--	N	N
24	--	--	--	--	--	--	N	N
25	--	--	--	--	--	--	N	N

Table C-2: Summary of SMP Areas and Historical Activities

Notes:

- 1 See Section 1.1.4.1 of the CCR (Tetra Tech 2008d) for a description of research activities associated with each building. Transformers are present in SMP Areas 2, 3, 7, 8, 20, 21, and 24. All transformers have been investigated. Remediation activities are planned to remove PCB contamination near the B112 and B150 transformers in SMP Areas 3 and 7. PCB levels at all other transformers do not require remediation.
- 2 Cleanups planned for mercury in SMP Area 3, and for PCBs in SMP Areas 3 and 7.
- 3 Depth indicated is the range of depths of the remediated area within the SMP Area.
- 4 TCE groundwater concentration exceeds site-specific goal of 270 µg/L established by DTSC for the Campus Bay site (EKI 2008; Terraphase 2012).
- 5 Carbon tetrachloride groundwater concentration exceeds commercial RBC of 2.63 µg/L (Tetra Tech 2013).
- 6 A wooden vault approximately six foot by six foot by six feet deep containing cinders was discovered during the remedial action. The structure and cinders were removed.

Acronyms:

--	None/not applicable	N	No
µg/L	Micrograms per liter	MFA	Mercury Fulminate Area
AOC	Area of concern	Pb	Lead
As	Arsenic	PCB	Polychlorinated biphenyl
AST	Aboveground storage tank	RA	Remedial area
CCC	California Cap Company	RBC	Risk-based concentration
Cr	Chromium	SMP	Soil management plan
COC	Chemical of concern	TCE	Trichloroethene
Cu	Copper	TCRA	Time-critical removal action
DTSC	Department of Toxic Substances Control	Terraphase	Terraphase Engineering, Inc.
EKI	Erler & Kalinowski, Inc.	Tetra Tech	Tetra Tech, Inc. (formerly Tetra Tech EM Inc.)
FPL WTP	Forest Products Products Laboratory Wood Treatment Laboratory	UC	University of California
ft bgs	Feet below ground surface	URS	URS Corporation
GW	Groundwater	UST	Underground storage tank
Hg	Mercury	Y	Yes

References:

EKI. 2008. "Revised Human Health Risk Assessment and Calculation of Site-Specific Goals for Lots 1, 2, and 3. Campus Bay Site, Richmond, California." April 30.

Terraphase. 2012. "Response to Department of Toxic Substances Control Comments Regarding the 'Revised TCE Risk Evaluation.' Campus Bay Site, Richmond, California." July 19.

Tetra Tech. 2008c. "Implementation Summary Report for a Time-Critical Removal Action at the Forest Products Laboratory Wood Treatment Laboratory." March 14.

Tetra Tech. 2008d. "Current Conditions Report, University of California, Berkeley, Richmond Field Station, Richmond California." November 21.

Tetra Tech. 2013. "Final Site Characterization Report, Proposed Richmond Bay Campus, University of California, Berkeley, Richmond Field Station, Richmond, California." May 28.

URS. 2003b. "Implementation Report, Phase 1 Subunit 2A, Meade Street Operable Unit, University of California, Berkeley, Richmond Field Station." September 4.

URS. 2004. "Implementation Report, Phase 2 Subunit 2A and 2B, Meade Street Operable Unit, University of California, Berkeley, Richmond Field Station." December 3.

URS. 2005. "Implementation Report, Phase 3 Upland Portion of Subunit 2B, Meade Street Operable Unit, University of California, Berkeley, Richmond Field Station." June 16.

Table C-3: Recommended Soil Sampling Density and Analysis for Sampling Design

SMP Area ¹	Sampling Density ²	Recommended Analytes ³				
		As, Hg, Pb, PCBs, PAHs	TPH	Dioxins	Explosives	VOCs
1	Low	X	--	--	--	--
2	High	X	--	--	--	--
3	High	X	--	--	--	--
4	High	X	--	--	--	X
5	High	X	--	--	--	X
6	High	X	--	X	--	X
7	High	X	--	--	--	--
8	Medium	X	--	--	--	--
9	High	X	--	--	--	--
10	High	X	--	--	--	X
11	High	X	--	--	--	--
12	High	X	--	--	X	--
13	Low	X	--	--	--	--
14	Low	X	--	--	--	--
15	High	X	--	--	--	X
16	Low	X	--	--	--	--
17	Low	X	--	--	--	--
18	Low	X	--	--	--	--
19	High	X	--	--	X	--
20	Medium	X	X	--	--	--
21	Medium	X ⁴	--	--	--	X
22	Low	X ⁴	--	--	--	--
23	Low	X	--	--	--	--
24	Low	X	--	--	--	--
25	Low	X	--	--	--	--

Notes:

- 1 See [Figure C-5](#) for location of SMP Areas.
- 2 Low, medium, and high sampling densities correspond to those defined in Section 4.1 of the SMP.
 Low = 1 sample location per 15,625 square feet of project area (125 foot grid spacing)
 Medium = 1 sample location per 10,000 square feet of project area (100 foot grid spacing)
 High = 1 sample location per 5,625 square feet of project area (75 foot grid spacing)
- 3 Existing sample results will be evaluated when selecting analytes at each sampling location.
- 4 Soil containing concentrations of arsenic in this SMP Area exceeding commercial RBCs may be associated with the FPL WTL and should be considered for off-site disposal.

Acronyms:

--	None/not applicable	PCB	Polychlorinated biphenyl
As	Arsenic	RBC	Risk-based concentration
FPL WTP	Forest Products Laboratory Wood Treatment Laboratory	SMP	Soil management plan
Hg	Mercury	TPH	Total petroleum hydrocarbons
PAH	Polycyclic aromatic hydrocarbons	VOC	Volatile organic compounds
Pb	Lead		

Table C-4 Historic Radiological Use and Sampling Locations, Reference List

Letter	Area/ Building	Investigation	Date	Reference
A	Transition Area	Sewage Treatment Experimental Ponds areas and B106 perimeter soils prior to demolition	4/22/2002	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32 and Appendix G copy of May 3, 2002 LBNL memo from Dave to Rod with 5/3/2002 analyses of twelve samples of miscellaneous structural material from the two historic research ponds including asphalt, sewage, gunite, soil, cinders and sediment.
B	B106	Building 106 decommissioning, meter survey and swipes, prior to demolition	6/1/2002	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32. Note, the concrete from demolition crushed and used as aggregate base under north end of Egret Way in 2003 repaving project.
C	Research Well Fields	Seventeen soil samples and two groundwater well water samples	10/1/2002	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32 and Appendix G copies of reports: Eberline Services. 2002. Water Sample Results from RFS-Well Field – Tritium. November 23. Eberline Services. 2002. Soil Sample Results from RFS-Well Field – Cesium-137. November 7. And UCB_ORR R210062 report. See also December 8, 2005 "Revised Technical Specifications for Well Destructions" Stellar Environmental, pages 15 and 16, and Attachment B (for documents listed above) .
D	Eastern Transition Area and adjacent Upland Area behind Seawall	Gamma spectroscopy of Phase 2 excavation areas including cinders, M3 marsh sediment, and upland side of the sea wall	11/20/2003	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32 and Appendix G excerpt from the December 3, 2004 URS Corporation "Implementation Report, Phase 2 Subunit 2A and 2B, Meade Street Operable Unit, University of California, Berkeley, Richmond Field Station" remedial activities summary and January 7, 2004 Eberline analytical report. (Sample locations are approximate on figure.)
E	Research Well Fields	Tritium and gross beta analysis of water in three wells during well destruction	4/11/2005	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32 and Appendix G copies of report: Eberline Services. May 17, 2005 analytical report "Richmond Field Station, 2005-21, Eberline Services Report R504066-8411 for groundwater sample results for three wells (224Southeast, New 50 West, and 50 East) collected for decommissioning waste characterization, copied from December 8, 2005 Revised Technical Specifications for Well Destructions, Stellar Environmental.
F	Bulb	Site B "Bulb" Survey Area	12/11/2006	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32 and Appendix G UC Berkeley. December 11, 2006 memorandum to the Richmond Field Station File from Zack Phillips of the Office of Environment, Health & Safety, regarding Follow up to Magnetometer Findings.
G	Meeker Beach, Bulb, B280	Site A Meeker Beach Survey Area, Site B "Bulb" Survey Area, Site C B280 Survey Area Ludlum meters and Ortec Detective surveys	12/21/2006	Tetra Tech 2008 Current Conditions Report Section 1.1.4.5 pages 29-32 and Appendix G report: January 3, 2007 Follow Up Survey of Three Separate Sites at RFS memorandum to the Richmond Field Station File and January 23, 2007 Ortec Detective memorandum to the Richmond Field Station File both from Zack Phillips of the Office of Environment, Health & Safety.
H	Western Transition Area Ash Piles	WTA Ash Pile Sampling	10/2/2008	Tetra Tech May 26, 2009. "Implementation Summary Report for a Time-Critical Removal Action at Two Subareas in the Western Transition Area, University of California, Berkeley, Richmond Field Station, Richmond, California." and February 2009 "Richmond Field Station Radiological Survey Report Debris Pit" by Jim Reese, ERS Solutions.
I	Bulb and CTP well	Bulb1, Bulb2 and CTP soil sampling during geoprobe boring prior to well installation	9/29/2010	Tetra Tech May 11, 2011 Final R1 Phase I Groundwater Sampling Results (page 7) and Tetra Tech April 1, 2011. Sampling Results for Waste Characterization Sampling from the Phase I Field Sampling Workplan Groundwater Investigation Attachment 1 RAD2. Note: CTP was sampled as "background".
J	Bulb and WTA well	Bulb1 and Bulb2 soil samples and meter survey of soil cuttings during well installation and WTA meter survey	10/13/2010	Tetra Tech May 11, 2011 FINAL R1 Phase I Groundwater Sampling Results (page 7) and Tetra Tech April 1, 2011. Sampling Results for Waste Characterization Sampling from the Phase I Field Sampling Workplan, Attachment 1 RAD2. Note WTA was used as "background" for meter survey.
K	B102/B110	Building 102 and 110 D&D, interior and soil underneath buildings	2011-2012	New World Environmental Inc November 18, 2012. Final Status Survey Report for UC Berkeley Capital Projects, Richmond Field Station, Buildings B102 and B110. CDPH License Amendment #90 issued 11/30/2012
L	B112/B113/B117/B150	B112/B113/B117/B150 D&D	2013-2014	New World Environmental August 3, 2013. Final Status Survey Report for Richmond Field Station Buildings 112, 113, 117 and 150, with follow-up and January 21, 2014 and May 19, 2014 letters from UC Berkeley EH&S to CDPH. CDPH License Amendment #95 issued July 2, 2014.
M	Bulb	EH&S Bulb meter survey of soil during shallow soil sample collection	7/27/2014	UC Berkeley EH&S August 5, 2014. Richmond Field Station Bulb Investigation letter report, UC Berkeley H&S (Karl Hans: Dan Hibbing, Radiation Safety to Karl Hans Environmental Protection.)
N	Bulb	Bulb1 and Bulb2 Pre-excavation groundwater sampling	10/14/2014	Tetra Tech. April 2015. Phase IV Sampling Results Technical Memorandum. University of California, Berkeley, Richmond Field Station, Richmond, California. April X .
O	Bulb	Bulb Exploratory Excavation	10/28/2014 - 10/30/2014	Tetra Tech April 2015 Phase IV Sampling Results Technical Memorandum. University of California, Berkeley, Richmond Field Station, Richmond, California. Attachment 5 Final Completion Report Exploratory Excavation for Magnetic Anomaly Source in Bulb, Cabrera Services March 2015.

EXHIBITS

EXHIBIT C1 Soil Management Plan Forms A, B, C

Richmond Bay Campus
Soil Management Plan
Project Approval Checklist
University of California

SMP FORM A: PROJECT OVERVIEW

1. Tracking No, Revision No. and Date:	<i>If after 6 months the project has not proceeded to the next step, the information on this form must be reviewed and updated as necessary.</i>		
2. Project Name:			
3. Description:	<i>Attach figure identifying project location</i>		
4. Points of Contact:	Name:	Position:	
	Email:	Phone:	
5. Estimated Schedule:			
6. DTSC Work Notice Requirements	Yes <input type="checkbox"/>	No <input type="checkbox"/>	If Yes, notify DTSC 14 days prior to activity
7. Impacts to Piezometer Network	Yes <input type="checkbox"/>	No <input type="checkbox"/>	Piezometer ID: If Yes, notify DTSC
8. Radiological Status Have radioactive materials been used within the project area? If yes, have buildings within the project area been properly decontaminated, decommissioned, and cleared by CDPH?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	
	Yes <input type="checkbox"/>	No <input type="checkbox"/>	If No, contact CDPH; do not investigate project area until it is cleared by CDPH
9. Total Volume of Soil Excavation Planned (in CY)			
10. De Minimis Status	Project exempt from SMP prescriptive requirements based on volume (< 10 CY or 500 square feet of hardscape)? Yes <input type="checkbox"/> No <input type="checkbox"/>		
11. SMP Form A Approval a. Greg Haet, Project Coordinator, EH&S b. Scott Shackleton, Facilities Management, UCB, College of Engineering c. Professional Civil Engineer or Geologist	_____		
	(Signature, Date)		

(Signature, Date)			

(Name, Signature, Date, Stamp)			

SMP FORM B: SAMPLING, DATA EVALUATION, SOIL MANAGEMENT ACTION

Project Name: _____

Tracking Number: _____ Revision Number: _____

Date Submitted to DTSC: _____

EH&S Point of Contact: _____

If this form has not been approved or no activities have occurred for 1 year, the information contained herein must be reviewed and updated as necessary prior to work occurring in the project area.

1. Sampling Design (attach Sampling Strategy Memorandum)

a. SMP Areas Affected	<i>Consult SMP Figure 6</i>	
b. Sampling Density and Planned Number of Sample Locations	<i>Consult SMP Figure 6</i>	
c. Chemicals of Concern and Summary of Existing Data	<i>Consult SMP Tables 1 and 2, and the most current groundwater report Include data summary in sampling strategy memorandum</i>	
d. Sampling Depths and Intervals	<i>Consult SMP Section 4.1</i>	
e. Project is within area of GW above screening criteria	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	<i>Consult SMP Table 1</i> If Yes, consult RAW, notify DTSC
f. Sampling design meets all SMP prescriptive requirements	Yes <input type="checkbox"/> No <input type="checkbox"/>	If No, DTSC concurrence received? Yes <input type="checkbox"/> No <input type="checkbox"/>

2. Data Evaluation (Post-Sampling) (attach Data Summary Report)

a. Sampling Design Implemented	Yes <input type="checkbox"/> No <input type="checkbox"/>	If No, describe deviations:
b. Sample Results Meet Category I	Yes <input type="checkbox"/> No <input type="checkbox"/>	<i>Consult SMP Table 3</i> If Yes, submit summary report with SMP Form B If sample results indicate unanticipated contamination or discovery, notify DTSC
c. Soil Exceeding Category I is Defined Vertically and Laterally	Yes <input type="checkbox"/> No <input type="checkbox"/> NA <input type="checkbox"/>	If No, consult sampling requirements or defer to excavation confirmation sampling
d. Soil Meets Category II Criteria	Yes <input type="checkbox"/> No <input type="checkbox"/> NA <input type="checkbox"/>	Soil proposed for on-site management requires plan Soil above Category II criteria requires excavation plan

3. Soil Management Action (attach On-Site Management or Soil Excavation Plan)

a. On-Site Management Plan Meets SMP Requirements	Yes <input type="checkbox"/> No <input type="checkbox"/>	<i>Consult SMP Section 4.3</i> If No, provide explanation or contact DTSC:
b. Excavation Plan Meets SMP Requirements	Yes <input type="checkbox"/> No <input type="checkbox"/>	<i>Consult SMP Section 4.3</i> If No, provide explanation or contact DTSC:

SMP FORM B: SAMPLING, DATA EVALUATION, SOIL MANAGEMENT ACTION

Project Name: _____

Tracking Number: _____ Revision Number: _____

Date Submitted to DTSC: _____

EH&S Point of Contact: _____

If this form has not been approved or no activities have occurred for 1 year, the information contained herein must be reviewed and updated as necessary prior to work occurring in the project area.

4. SMP Form B Approval	
a. Greg Haet, Project Coordinator, EH&S	_____ (Signature, Date)
b. Scott Shackleton, Facilities Management, UCB, College of Engineering	_____ (Signature, Date)
c. Professional Civil Engineer or Geologist	_____ (Name, Signature, Date, Stamp)
5. References Used to Complete Form	<i>Include names and dates of documents</i>

SMP FORM C: COMPLETION REPORT

Project Name: _____

Tracking Number: _____ Revision Number: _____

Date Submitted to DTSC: _____

EH&S Point of Contact: _____

If this form has not been approved or no activities have occurred for 1 year, the information contained herein must be reviewed and updated as necessary prior to work occurring in the project area.

<p>1. Summary of Completed Construction Project, Including Project Date (attach Completion Report)</p>		
<p>2. Dates of On-Site Project Work</p>		
<p>3. Summary of Completed Soil Management Actions</p>		
<p>4. On-Site Management Plan Implemented</p>	<p>Yes <input type="checkbox"/></p> <p>If No, describe deviations:</p>	<p>No <input type="checkbox"/> NA <input type="checkbox"/></p>
<p>5. Soil Excavation Plan Implemented</p>	<p>Yes <input type="checkbox"/></p> <p>If No, describe deviations:</p>	<p>No <input type="checkbox"/> NA <input type="checkbox"/></p>
<p>6. Project Completion Report Meets SMP Requirements</p>	<p>Yes <input type="checkbox"/></p> <p>If No, contact DTSC</p>	<p>No <input type="checkbox"/></p>
<p>7. SMP Form C Approval a. Greg Haet, Project Coordinator, EH&S</p>	<p>_____ (Signature, Date)</p>	
<p>b. Scott Shackleton, Facilities Management, UCB, College of Engineering</p>	<p>_____ (Signature, Date)</p>	
<p>c. Professional Civil Engineer or Geologist</p>	<p>_____ (Name, Signature, Date, Stamp)</p>	

EXHIBIT C2 Sampling and Analysis Plan

Final

**Sampling and Analysis Plan for the
Soil Management Plan
Removal Action Workplan, Exhibit C2**

**Berkeley Global Campus at Richmond Bay,
Richmond, California**

Research, Education, and Support Area within the
Former Richmond Field Station

April 12, 2017

Prepared for

Office of Environment, Health & Safety
University of California, Berkeley
317 University Hall No. 1150
Berkeley, California 94720

Prepared by



TETRA TECH, INC.

1999 Harrison Street, Suite 500
Oakland, California 94612

CONTENTS

ACRONYMS AND ABBREVIATIONS	C2-iv
EXECUTIVE SUMMARY	C2-ES-1
1.0 INTRODUCTION	C2-1
1.1 BACKGROUND.....	C2-1
1.2 PROJECT OBJECTIVE	C2-2
1.3 PROJECT ORGANIZATION AND RESPONSIBILITIES	C2-2
2.0 SAMPLING DESIGN	C2-4
3.0 SAMPLING PROCEDURES	C2-5
3.1 HAND AUGER	C2-5
3.2 DRILLING METHODS	C2-5
3.2.1 Direct Push.....	C2-5
3.2.2 Hollow-Stem Auger	C2-6
3.3 OTHER	C2-6
4.0 ANALYTICAL PROCEDURES.....	C2-7
4.1 ANALYTICAL METHODS.....	C2-7
4.2 QUANTITATION LIMITS	C2-7
4.3 SELECTION OF ANALYTICAL LABORATORIES.....	C2-19
5.0 QUALITY ASSURANCE OBJECTIVES	C2-20
5.1 DATA QUALITY OBJECTIVE PROCESS	C2-20
5.2 QUALITY ASSURANCE OBJECTIVES FOR MEASUREMENT DATA.....	C2-20
5.2.1 Sensitivity	C2-21
5.2.2 Precision and Accuracy.....	C2-21
5.2.3 Representativeness	C2-22
5.2.4 Completeness	C2-22
5.2.5 Comparability	C2-23
5.3 FIELD QUALITY CONTROL SAMPLES	C2-23
6.0 SAMPLE CUSTODY	C2-26
6.1 SAMPLE IDENTIFICATION	C2-26
6.2 SAMPLE LABELS	C2-26
6.3 SAMPLE DOCUMENTATION	C2-26
6.4 CHAIN OF CUSTODY.....	C2-27
6.5 SAMPLE SHIPMENT	C2-28

CONTENTS (Continued)

6.6 DECONTAMINATION PROCEDURESC2-29

6.7 MANAGEMENT OF IDWC2-29

7.0 DATA REDUCTION, VALIDATION, AND REPORTINGC2-30

7.1 FIELD DATA VERIFICATIONC2-30

7.2 LABORATORY DATA VERIFICATION.....C2-30

7.3 LABORATORY DATA VALIDATIONC2-30

 7.3.1 Cursory Data ValidationC2-30

 7.3.2 Full Data Validation.....C2-31

8.0 DATA ASSESSMENT PROCEDURESC2-32

9.0 REFERENCESC2-33

Tables

Table C2-1: Key Personnel.....C2-3

Table C2-2: Analytical Requirements TableC2-8

Table C2-3: Required Laboratory Quantitation Limits and QC Criteria.....C2-9

Table C2-4: QC Samples for Precision and Accuracy.....C2-25

ACRONYMS AND ABBREVIATIONS

BGC	Berkeley Global Campus
CAS	Chemical Abstracts Service
CCC	California Cap Company
CHSSL	California Human Health Screening Levels
COC	Chemical of concern
CPT	Cone penetrometer
DTSC	Department of Toxic Substances Control
EH&S	Environmental Health & Safety
EPA	Environmental Protection Agency
IDW	Investigation-derived waste
LCS	Laboratory control sample
LRDP	Long Range Development Plan
mg/kg	Milligram per kilogram
MS	Matrix spike
MSD	Matrix spike duplicate
ng/kg	Nanograms per kilogram
PAH	Polycyclic aromatic hydrocarbons
PARCC	Precision, accuracy, representativeness, completeness, and comparability
PCB	Polychlorinated biphenyl
QA	Quality assurance
QC	Quality control
RAW	Remedial action work plan
RES	Research, Education, and Support
RFS	Richmond Field Station
RPD	Relative percent difference
SAP	Sampling and analysis plan
SMP	Soil Management Plan
Tetra Tech	Tetra Tech EM Inc. (1996-2012): currently Tetra Tech, Inc.
TPH	Total petroleum hydrocarbons
UC	University of California
UC Berkeley	University of California, Berkeley
VOC	Volatile organic compound

EXECUTIVE SUMMARY

This sampling and analysis plan (SAP) is one element of the Soil Management Plan (SMP) for the Berkeley Global Campus (BGC). The SMP is an appendix to the Removal Action Workplan, but is also intended to serve as a stand-alone document to guide management of future environmental actions conducted at the “Research, Education, and Support” (RES) Area of the BGC. The SMP establishes management requirements for areas at BGC to ensure that soil disturbance activities do not adversely impact human health or the environment and that the soils are handled, stored and disposed of, or reused onsite in accordance with applicable laws, regulations, and University of California policies. The SAP addresses the quality assurance (QA) and quality control (QC) aspects of the field, laboratory, and data reporting efforts associated with the proposed activities to address the data gaps. The success of an environmental data collection effort depends on the quality of the data collected and used to make decisions. The intent of this SAP is to establish protocols for assuring quality data collection and criteria for determining the quality of resultant data.

- **Section 1.0 – Project Description:** This section gives a brief overview of the history of the site, a description of the current conditions at the BGC. For more information about past or current conditions at the site, please refer to the Site Characterization Report, Proposed BGC, Richmond, California (Tetra Tech EM Inc. (1996-2012): currently Tetra Tech, Inc. 2013). The second subsection describes the project objective, and the third contains a table summarizing roles and responsibilities of Environmental Health & Safety decision makers.
- **Section 2.0 – Sampling Design:** This section outlines the sampling evaluation process and sampling plan requirements for sampling projects within the RES Area.
- **Section 3.0 – Sampling Procedures:** This section presents specific procedures for various soil sampling methods.
 - Subsection 3.1 – Hand Auger: This subsection describes procedures for soil sample collection using a hand auger.
 - Subsection 3.2 – Drilling Methods: This subsection provides describes procedures for soil sample collection using drilling methods.
- **Section 4.0 – Analytical Procedures:** Section 4.0 describes the laboratory methods that may be used at the RES area for measurements and analysis. These methods are the same as those approved by the Environmental Protection Agency (EPA) unless otherwise documented.
 - Subsection 4.1 – Laboratory Methods: This subsection provides a summary of the EPA-approved laboratory analytical methods that will be used for the analysis of BGC samples.
 - Subsection 4.2 – Quantitation Limits: Analytical laboratories will be required to ensure that quantitation limits are sufficiently low to allow comparison to the risk based concentration screening criteria.
 - Subsection 4.3 – Laboratory Selection: This subsection presents the criteria to be considered when evaluating contract laboratories.

- **Section 5.0 – Quality Assurance Objectives:** Section 5.0 defines the specific QA and QC activities that will be applied to ensure that the environmental data collected are of the type and quality needed.
 - Subsection 5.1 – Data Quality Objective Process: This subsection describes the overall QA objective for collecting data that will provide results that are usable for their intended purpose.
 - Subsection 5.2 – Quality Assurance Objectives for Measurement Data: This subsection addresses the level of QC effort and objectives for sensitivity; accuracy and precision; and representativeness, completeness, and comparability of data.
 - Subsection 5.3 – Field Quality Control Samples: This subsection indicates the quality control samples that will be collected and analyzed for this project.
- **Section 6.0 – Sample Custody:** This section describes sample handling procedures including sample identification, labeling, documentation, and chain-of-custody forms. It also discusses proper practices for packing and shipping samples to laboratories. Equipment decontamination and management of investigation derived waste are also briefly described.
- **Section 7.0 – Data Reduction, Validation, and Reporting:** This section describes the methods used for verifying and validating data in the field, laboratory, and office.
- **Section 8.0 – Data Assessment Procedures:** This section describes the evaluation of the data to determine whether data objectives have been met.
- **Section 9.0 – References:** This section lists site reports, scientific reference materials, and regulatory guidance and standards cited throughout the document.

1.0 INTRODUCTION

This Sampling and Analysis Plan (SAP) is one element of the Soil Management Plan (SMP), which is intended to guide management of future environmental actions conducted at the Research, Education, and Support (RES) Area of the Berkeley Global Campus (BGC). The SAP addresses the quality assurance (QA) and quality control (QC) aspects of the field, laboratory, and data reporting efforts associated with the future proposed construction activities. The success of an environmental data collection effort depends on the quality of the data collected and used to make decisions. The intent of this SAP is to establish protocols for assuring quality data collection and criteria for determining the quality of resultant data.

1.1 BACKGROUND

The former Richmond Field Station (RFS) is an academic teaching and research facility, located at 1301 South 46th Street, Richmond, California, along the eastern shoreline of the Richmond Inner Harbor of the San Francisco Bay and northwest of Point Isabel, approximately 6 miles northwest of the University of California (UC) Berkeley Central Campus. The SMP and SAP focus on the portions of the former RFS which the proposed BGC designates as developable under the Long Range Development Plan (LRDP), identified as the RES Area. The RES Area consists of 82.5 acres within the former RFS. The RES Area occupies portions of the upland area and Transition Area. The proposed LRDP also designates a portion of the BGC preserved as Natural Open Space Area (26.5 acres). This Natural Open Space Area is not a part of the SMP.

Between the 1880s and 1948 and prior to UC ownership, the California Cap Company (CCC) operated facilities on portions of the RFS property for the manufacturing of blasting caps, shells, and explosives. Two small companies, the U.S. Briquette Company and the Pacific Cartridge Company, are presumed to have operated on a portion of the RFS property. By 1920, the CCC was the only remaining explosives manufacturer on site.

In October 1950, the CCC property was purchased by UC with the agreement that the CCC would remove all hazardous materials from the property. However, subsequent site observations and testing revealed the presence of hazardous materials on RFS. For example, several explosions reportedly occurred between 1950 and 1953 during a controlled burn for clearing. These explosions likely were associated with residual chemicals used by the CCC. Previous investigations in the test pit and explosive storage area found a single detection of explosives at a concentration close to the detection limit (URS Corporation 2000).

The former RFS was initially established by UC Berkeley for large-scale engineering research that required significant space and resources that were not available on UC Berkeley's central campus in downtown Berkeley. In addition to UC Berkeley-related operations, the UC Regents have leased space to non-UC Berkeley tenants. Complete environmental site conditions are presented in the Draft Site Characterization Report for the Proposed BGC (Tetra Tech EM Inc. [1996-2012]: currently Tetra Tech, Inc. [Tetra Tech] 2013).

1.2 PROJECT OBJECTIVE

The SMP provides a systematic process intended to ensure that future projects in the RES area impacting subsurface soils will not result in uncontrolled exposures to unknown or unidentified contaminants. The SMP prescribes protocols for Department of Toxic Substances Control (DTSC) notification; soil sampling, data analyses, soil management or disposal practices; and final reporting. DTSC notification is conducted through the submittal of SMP checklist forms throughout the process. Soil sampling is based on prescribed sampling frequency, depths, and chemicals of concern which are determined based on the size and location of the project. Soil management and disposal practices are based on comparison of soil sample results to screening criteria, and final reporting is conducted through submittal of a completion report once the project has been completed.

All soil disturbance activities within the RES Area require Office of Environment, Health & Safety (EH&S) notification. This notification will be provided in the form of a three-part Project Approval Checklist (SMP Forms A, B and C). This SAP establishes protocols for assuring quality data collection and criteria for determining the quality of resultant data in support of *SMP Form B, Sampling Design, Data Evaluation, and Soil Management*.

1.3 PROJECT ORGANIZATION AND RESPONSIBILITIES

The roles and responsibilities of the BGC project team members with respect to sampling and analysis are provided in [Table C2-1](#). Principal decision makers are further defined in the accompanying SMP.

TABLE C2-1: KEY PERSONNEL

Organization	Role	Responsibilities
UC, EH&S	Project Coordinator	Directs environmental health and safety compliance of the SMP. Receives notices, comments, approvals, and related communications from DTSC. Reports to and interacts with the DTSC for all SMP tasks. Signatory to SMP Forms A, B, C.
UC, EH&S	Project Geologist	Reviews all documents for technical accuracy.
DTSC	Remedial Project Manager	Reviews environmental health and safety compliance of the SMP. Signatory to 5-year remedial action work plan (RAW) review process including updated SMP, if appropriate. Receives notices, comments, and related communications from UC. Interacts with UC for all SMP tasks. Reviews all submittals and notifications to DTSC for quality and completeness.
Project-by-Project Basis	Field team Leader	Responsible for directing day-to-day field activities conducted by subcontractor personnel. Verifies that field sampling and measurement procedures follow the sampling planning document. Provides project manager with regular reports on status of field activities.
Laboratory	Project Manager	Responsible for delivering analytical services that meet requirements of SAP. Reviews chains of custody to understand analytical requirements. Works with project chemist to confirm sample delivery schedules. Reviews laboratory data package before submittal.

2.0 SAMPLING DESIGN

This section outlines the sampling evaluation process and sampling plan requirements for sampling projects within the RES Area. Based on knowledge of the location and depth of the proposed soil disturbance activity, identify the soil sampling and analysis needed to evaluate the soil within the footprint of the proposed project. Projects which are not exempted from sampling, as discussed in Section 3.4 of the SMP, require collection, analysis and evaluation of additional soil chemical data in order to determine the appropriate soil management decision and action. EH&S must approve the sampling design (Form B) prior to implementation.

General

Sampling Design will be project-specific, depending on the geographical location, size, and depth of soil to be disturbed by the proposed project. As a first step, identify the SMP Area(s) (see SMP [Figure C-6](#) and [Table C-2](#)) corresponding to the proposed project area. The minimum soil sample location density and chemicals of concern (COC) for each of the 25 SMP Areas are listed in [Table C-3](#) of the SMP.

Soil Sampling Methodology

Soil samples should be collected in accordance with the methods found in Section 6.0 of this SAP.

Analytical Requirements

Analytical requirements for soil are summarized on [Table C-3](#) of the SMP and will vary depending on the location of the project within the RES Area. Soil samples should be analyzed in accordance with the methods designated in [Table C2-2](#).

Design Documentation

Sampling Design must be documented with sufficient detail for reviewer to (1) understand the project geographical area within the RES Area and depths of proposed soil disturbance, including project figure; (2) to check that the proposed sampling locations, depths and analysis meet the requirements of the SMP; and (3) the Sampling Design adequately takes into account known conditions within the project area, such as presence of existing buildings, remediated areas, or prior soil sample data. Section 4.1 of the SMP details the Sample Design process. The Sampling Design shall be approved by EH&S on Form B of Checklist prior to embarking on the field sampling effort.

3.0 SAMPLING PROCEDURES

The following sections describe methods for collecting soil samples. Samples will be collected for analysis of volatile organic compounds (VOC) and total petroleum hydrocarbons (TPH)-gasoline using an EnCore sampler. For all other analytical parameters, samples will be collected in sleeves or jars (Table C2-2).

3.1 HAND AUGER

A hand auger equipped with extensions and a “T” handle is used to obtain samples from a depth of up to 6 feet. If necessary, a shovel may be used to excavate the topsoil to reach the desired subsoil level. If topsoil is removed, its thickness should be recorded. Samples obtained using a hand auger are disturbed in their collection, so that determining the exact depth at which samples are obtained is difficult. The hand auger is screwed into the soil at an angle of 45 to 90 degrees from horizontal. When the entire auger blade has penetrated soil, the auger is removed from the soil by lifting it straight up without turning it, if possible. If the desired sampling depth has not been reached, the soil is removed from the auger and deposited onto plastic sheeting. This procedure is repeated until the desired depth is reached and the soil sample is obtained. The auger is then removed from the boring, and the soil sample is collected directly from the auger into an appropriate sample container.

All soil samples collected from less than 5 feet will be collected through hand auger equipment to ensure safety from unidentified utility lines.

3.2 DRILLING METHODS

Primary drilling methods expected to be of potential use at the BGC site include traditional auger drilling, direct-push methods, and potentially some type of small sonic drilling tools. Because of the proximity of the site to buildings and workers, the preferred methods will generally be direct-push methods because they are agile and create less of a disturbance, and are mobile and can be moved easily and quickly based on field sampling results.

3.2.1 Direct Push

Direct-push platforms have gained widespread acceptance in the environmental industry over the past decade because of their versatility, relatively low cost, and mobility. Using the weight of the truck in combination with a hydraulic ram or hammer, a tool string is pushed into the ground. All borehole locations must be advanced by hand auger equipment up to 5 feet before use of direct push techniques.

The two major classes of direct-push platforms are cone penetrometer (CPT) and percussion hammer systems. The distinction between these units is that CPT units advance the tool string by applying a hydraulic ram against the weight or mass of the vehicle alone, while percussion hammer units add a hammer to the hydraulic ram to compensate for their lower mass. These platforms share the same principle of operation, similar tools, and a number of advantages and limitations. They differ in scale, application, and to some extent the types of instruments and tools that have been developed for each. For these reasons, CPT and percussion hammer

platforms fill different niches in the environmental field. CPT rigs can generally push to greater depths and push larger-diameter rods; they allow sampling from depths that are inaccessible using percussion hammer rigs. Percussion hammer rigs are generally smaller, more portable, and require less training to use; they allow samples to be collected from places, including inside of buildings that are inaccessible to a CPT rig. Although they are sometimes limited in the depths to which they can penetrate, some of the smaller percussion hammer units as well as smaller CPT rigs can be anchored to the ground using earth augers to add to the reaction mass of the vehicle alone.

Because of their methods of operation, direct-push systems provide some unique advantages when collecting soil and soil-gas samples. In particular, direct-push systems are quicker and more mobile than traditional drill rigs. Sampling and data collection are faster, reducing the time needed to complete an investigation and increasing the number of sample points that can be collected during the investigation. Soil sampling systems have been developed in response to a need to collect samples of unconsolidated material from a range of depths, without generating large volumes of cuttings. Direct-push soil samplers also allow investigators to collect soil samples from a specific depth, with minimal disturbance to soil stratigraphy.

3.2.2 Hollow-Stem Auger

Hollow-stem augers are readily available and are recommended for penetrating unconsolidated materials when direct-push applications are not appropriate. Auger rigs are light and maneuverable. Each section or flight is typically 5 feet in length. A head is attached to the first flight, and cuttings are rotated to the surface as the borehole is advanced. A pilot bit (or center bit) can be held at the base of the first flight with drill rods to prevent cuttings from entering. When the bit is removed, formation samples can be obtained through the auger using split-spoon or thin-wall samplers.

3.3 OTHER

If a construction footprint at the BGC site includes an existing monitoring well, it will be necessary to move the well and collect a groundwater sample from the new well. For groundwater well installation and sampling, refer to Appendix A of the Field Sampling Workplan (Tetra Tech 2010).

4.0 ANALYTICAL PROCEDURES

The following sections the analytical methods and laboratory selection criteria for samples collected for the RES area.

4.1 ANALYTICAL METHODS

The COCs in the RES area are metals, polycyclic aromatic hydrocarbons (PAH), and polychlorinated biphenyls (PCB). In addition, VOCs, TPH, and dioxins may need to be investigated. SMP Form B will indicate the appropriate analyses for each investigation. [Table C2-2](#) specifies the analytical methods, maximum holding time, sample containers, and preservation for the possible chemicals to be investigated in the RES area.

4.2 QUANTITATION LIMITS

To ensure risk based screening criteria are met, analytical laboratories will be required to ensure quantitation limits are sufficiently low to allow comparison to the screening criteria. [Table C2-3](#) lists the chemical, risk based concentration screening criteria, and required laboratory quantitation limit. If the laboratory reporting limit for a given chemical is not sufficiently low to allow comparison to the risk based screening criteria, a further discussion of that chemical with DTSC is required, or alternative methods should be pursued.

TABLE C2-2: ANALYTICAL REQUIREMENTS TABLE

Matrix	Analytical Group	Analytical Method	Containers	Sample Volume	Preservation Requirements	Maximum Holding Time (preparation / analysis)
All RES areas						
Soil	Metals	SW-846 EPA 6010/7471	8 ounce glass jar or sleeve	5 grams	Cool, 4+/- 2°C	180 days (28 days mercury)
Soil	PAHs	SW-846 EPA 8270-SIM		30 grams	Cool, 4+/- 2°C	14 days/40 days
Soil	PCBs	SW-846 EPA 8082		30 grams	Cool, 4+/- 2°C	14 days/40 days
Potential analyses						
Soil	VOCs	SW-846 EPA 5035/8260	EnCore sampler	5 grams	Cool, 4 °C ± 2	48 hours to preserve/14 days
Soil	Dioxins	SW-846 EPA 8280	4 ounce glass jar or sleeve	30 grams	Cool, 4 °C ± 2	30 days
Soil	TPH-purgeables	SW-846 EPA 5035/8015	EnCore sampler	5 grams	Cool, 4 °C ± 2	48 hours to preserve/14 days
Soil	TPH-extractables	SW-846 8015	4 ounce glass jar or sleeve	30 grams	Cool, 4 °C ± 2	14 days/40 days

Note:

EPA Environmental Protection Agency

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA

Total Metals (EPA 6010/7471)

Chemical	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD %Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample %Recovery	Duplicate Relative Percent Difference
Antimony	7440-36-0	109	15	75 - 125	20	85 - 115	20
Arsenic	7440-38-2	16.0 ¹	10	75 - 125	20	85 - 115	20
Barium	7440-39-3	2,110	2,000	75 - 125	20	85 - 115	20
Beryllium	7440-41-7	29	10	75 - 125	20	85 - 115	20
Cadmium	7440-43-9	68.1	35	75 - 125	20	85 - 115	20
Chromium	7440-47-3	100,000	50,000	75 - 125	20	85 - 115	20
Cobalt	7440-48-4	73	50	75 - 125	20	85 - 115	20
Copper	7440-50-8	10,900	1,500	75 - 125	20	85 - 115	20
Iron	7439-89-6	100,00	27,000	75 - 125	20	85 - 115	20
Lead	7439-92-1	320	40	75 - 125	20	85 - 115	20
Mercury	7439-97-6	77	10	80 - 120	20	85 - 115	20
Manganese	7439-96-5	5,900	900	75 - 125	20	85 - 115	20
Molybdenum	7439-98-7	1,360	190	75 - 125	20	85 - 115	20
Nickel	7440-02-0	280	250	75 - 125	20	85 - 115	20
Selenium	7782-49-2	1,340	190	75 - 125	20	85 - 115	20
Silver	7440-22-4	1,360	190	75 - 125	20	85 - 115	20
Thallium	7440-28-0	2.72	0.50	75 - 125	20	85 - 115	20
Vanadium	7440-62-2	1,360	190	75 - 125	20	85 - 115	20
Zinc	7440-66-6	81,600	11,000	75 - 125	20	85 - 115	20

Notes:

- 1 Background
- CAS Chemical Abstracts Service
- mg/kg Milligram per kilogram
- MS Matrix spike
- MSD Matrix spike duplicate
- QC Quality control

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Polycyclic Aromatic Hydrocarbons (EPA 8270-SIM)**

Chemical	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MS % Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample % Recovery	Surrogate % Recovery
Naphthalene	91-20-3	3.57	1.8	45 - 115	40	50 - 115	-
Acenaphthene	83-32-9	6,050	1,600	45 - 115	40	50 - 115	-
Acenaphthylene	208-96-8	6,050	1,600	45 - 115	40	50 - 115	-
Fluorene	86-73-7	4,030	40	45 - 115	40	50 - 115	-
Phenanthrene	85-01-8	4,030	1,100	45 - 115	40	50 - 115	-
Anthracene	120-12-7	30,200	8,200	45 - 115	40	50 - 115	-
Fluoranthene	206-44-0	4,030	1,100	45 - 115	40	50 - 115	-
Pyrene	129-00-0	3,020	820	45 - 115	40	50 - 115	-
Benzo(a)anthracene	56-55-3	0.880	0.04	45 - 115	40	50 - 115	-
Chrysene	218-01-9	8.80	0.40	45 - 115	40	50 - 115	-
Benzo(b)fluoranthene	205-99-2	0.880	0.04	45 - 115	40	50 - 115	-
Benzo(k)fluoranthene	207-08-9	0.880	0.04	45 - 115	40	50 - 115	-
Benzo(a)pyrene	50-32-8	0.145	0.007	45 - 115	40	50 - 115	-
Indeno(1,2,3-cd)pyrene	193-39-5	0.880	0.04	45 - 115	40	50 - 115	-
Dibenzo(a,h)anthracene	53-70-3	0.145	0.03	45 - 115	40	50 - 115	-
Benzo(g,h,i)perylene	191-24-2	13,020	820	45 - 115	40	50 - 115	-
1-Methylnaphthalene	90-12-0	36.4	7.4	45 - 115	40	50 - 115	-
2-Methylnaphthalene	91-57-6	403	110	45 - 115	40	50 - 115	-
2-Fluorobiphenyl	-	-	-	-	-	-	50 - 110
Terphenyl-d14	-	-	-	-	-	-	50 - 135

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Polycyclic Aromatic Hydrocarbons (EPA 8270-SIM) (Continued)**

Chemical	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD % Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample % Recovery	Surrogate % Recovery
2,4,6-Tribomophenol	-	-	-	-	-	-	40 – 125
2-Fluorophenol	-	-	-	-	-	-	20 – 110
Nitrobenzene-d5	-	-	-	-	-	-	40 - 110

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Polychlorinated Biphenyls (EPA 8082)**

Analyte	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD % Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample % Recovery	Surrogate % Recovery
PCB-1242	53469-21-9	1	0.10	60 - 130	30	60 - 130	60 - 125
PCB-1248	12672-29-6	1	0.10	60 - 130	30	60 - 130	60 - 125
PCB-1254	11097-69-1	1	0.10	60 - 130	30	60 - 130	60 - 125
PCB-1260	11096-82-5	1	0.10	60 - 130	30	60 - 130	60 - 125

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Volatile Organic Compounds (EPA 8260B)**

Chemical	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD % Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample % Recovery	Surrogate % Recovery
1,1,1-Trichloroethane	71-55-6	-	-	65 – 130	40	70 - 125	-
1,1,1,2-Tetrachloroethane	630-20-6	-	-	65 - 130	40	70 - 125	-
1,1,2,2-Tetrachloroethane	79-34-5	-	-	65 – 130	40	70 - 125	-
1,1,2-Trichloroethane	79-00-5	-	-	65 - 130	40	70 - 125	-
1,2,3-Trichloropropane	96-18-4	-	-	65 – 130	40	70 - 125	-
1,1-Dichloroethane	75-34-3	-	-	65 - 130	40	70 - 125	-
1,1-Dichloroethene	75-35-4	-	-	65 – 130	40	70 - 125	-
1,2-Dibromo-3-chloropropane	96-12-8	-	-	65 - 130	40	70 - 125	-
1,2-Dibromoethane	106-93-4	-	-	65 – 130	40	70 - 125	-
1,2-Dichloroethane	107-06-2	-	-	65 - 130	40	70 - 125	-
1,2-Dichloropropane	78-87-5	0.993	0.46	65 – 130	40	70 - 125	-
2-Butanone	78-93-3	-	-	65 - 130	40	70 - 125	-
2-Hexanone	591-78-6	-	-	65 – 130	40	70 - 125	-
Acetone	67-64-1	100,000	24,000	65 - 130	40	70 - 125	-
Benzene	71-43-2	0.320	0.15	65 – 130	40	70 - 125	-
Bromodichloromethane	75-27-4	-	-	65 - 130	40	70 - 125	-
Bromoform	75-25-2	-	-	65 – 130	40	70 - 125	-
Bromomethane	74-83-9	-	-	65 - 130	40	70 - 125	-
Carbon disulfide	75-15-0	-	-	65 – 130	40	70 - 125	-
Carbon tetrachloride	56-23-5	-	-	65 - 130	40	70 - 125	-

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Volatile Organic Compounds (EPA 8260B) (Continued)**

Chemical	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD % Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample % Recovery	Surrogate % Recovery
Chlorobenzene	108-90-7	-	-	65 – 130	40	70 - 125	-
Chloroethane	75-00-3	-	-	65 - 130	40	70 - 125	-
Chloroform	67-66-3	-	-	65 – 130	40	70 - 125	-
Chloromethane	74-87-3	-	-	65 - 130	40	70 - 125	-
<i>cis</i> -1,2-Dichloroethene	156-59-2	-	-	65 – 130	40	70 - 125	-
<i>cis</i> -1,3-Dichloropropene	10061-01-5	-	-	65 - 130	40	70 - 125	-
Dibromochloromethane	124-48-1	-	-	65 – 130	40	70 - 125	-
Dibromomethane	74-95-3	-	-	65 - 130	40	70 - 125	-
Dichlorodifluoromethane	75-71-8	-	-	65 – 130	40	70 - 125	-
Ethylbenzene	100-41-4	5.94	2.5	65 - 130	40	70 - 125	-
Methylene chloride	75-09-2	-	-	65 – 130	40	70 - 125	-
Methyl tert-Butyl Ether	1634-04-4	-	-	65 - 130	40	70 - 125	-
Tetrachloroethene	127-18-4	-	-	65 – 130	40	70 - 125	-
Toluene	108-88-3	1,440	550	65 - 130	40	70 - 125	-
<i>trans</i> -1,2-Dichloroethene	156-60-5	-	-	65 – 130	40	70 - 125	-
<i>trans</i> -1,3-Dichloropropene	10061-02-6	-	-	65 - 130	40	70 - 125	-
Trichloroethylene	79-01-6	1.03	0.44	65 – 130	40	70 - 125	-
Trichlorofluoromethane	75-69-4	-	-	65 - 130	40	70 - 125	-
Vinyl chloride	75-01-4	-	-	65 – 130	40	70 - 125	-
<i>o</i> -Xylenes	95-47-6	725	340	65 - 130	40	70 - 125	-
<i>m/p</i> -Xylenes	6777-61-2	614	300	65 – 130	40	70 - 125	-
1,2-Dichloroethane-d4	-	-	-	-	-	-	70 – 120

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Volatile Organic Compounds (EPA 8260B) (Continued)**

Chemical	CAS Number	Risk Based Concentration Screening Criteria (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD % Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample % Recovery	Surrogate % Recovery
4-Bromofluorobenzene	-	-	-	-	-	-	75 – 120
Dibromofluoromethane	-	-	-	-	-	-	85 – 115
Toluene-d8	-	-	-	-	-	-	85 - 120

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)

Total Petroleum Hydrocarbons (EPA 8015)

Chemical	CAS Number	Environmental Screening Level (mg/kg)	Required Laboratory Quantitation Limit (mg/kg)	MS/MSD %Recovery	MS/MSD Relative Percent Difference	Laboratory Control Sample %Recovery	Surrogate %Recovery
TPH-purgeables							
Gasoline	86290-81-5	2,800	210	70 – 130	40	75 – 125	-
Bromofluorobenzene	-	-	-	-	-	-	70 - 140
TPH-extractables							
Diesel (C10-C24)	68334-30-5	880	250	65 – 140	40	75 – 125	-
Motor Oil (C24-C36)	NA	32,000	1,250	65 – 140	40	75 - 125	-
Bromobenzene	-	-	-	-	-	-	50 - 150
Hexacosane	-	-	-	-	-	-	50 - 150

Source:

California Regional Water Quality Control Board 2016. "Environmental Screening Levels, San Francisco Bay Regional Water Quality Control Board." February. Available on-line at: http://www.waterboards.ca.gov/sanfranciscobay/water_issues/programs/ESL/ESL%20Workbook_ESLs_Interim%20Final_22Feb16_Rev3_PDF.pdf

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Dioxins/Furans (EPA 8290)**

Chemical	CAS Number	Toxicity Equivalence Factor	CHSSL (ng/kg)	Required Laboratory Quantitation Limit (ng/kg)	Laboratory Control Sample %Recovery	Surrogate %Recovery
2,3,7,8-Tetrachlorodibenzo-p-dioxin (TCDD)	1746-01-6	1.0	19	19	70 - 130	-
1,2,3,7,8-Pentachlorodibenzo-p-dioxin (PeCDD)	40321-76-4	1.0	-	19	70 - 130	-
1,2,3,4,7,8-Hexachlorodibenzo-p-dioxin (HxCDD)	39227-28-6	0.10	-	1.9	70 - 130	-
1,2,3,6,7,8-Hexachlorodibenzo-p-dioxin (HxCDD)	57653-85-7	0.10	-	1.9	70 - 130	-
1,2,3,7,8,9-Hexachlorodibenzo-p-dioxin (HxCDD)	19408-74-3	0.10	-	1.9	70 - 130	-
1,2,3,4,6,7,8-Heptachlorodibenzo-p-dioxin (HpCDD)	35822-46-9	0.01	-	0.19	70 - 130	-
1,2,3,4,6,7,8,9-Octachlorodibenzo-p-dioxin (OCDD)	3268-87-9	0.0003	-	0.0057	70 - 130	-
2,3,7,8-Tetrachlorodibenzofuran (TCDF)	51207-31-9	0.10	-	1.9	70 - 130	-
1,2,3,7,8-Pentachlorodibenzofuran (PeCDF)	57117-41-6	0.03	-	0.57	70 - 130	-
2,3,4,7,8-Pentachlorodibenzofuran (PeCDF)	57117-31-4	0.30	-	5.7	70 - 130	-
1,2,3,4,7,8-Hexachlorodibenzofuran (HxCDF)	70648-26-9	0.10	-	1.9	70 - 130	-
1,2,3,6,7,8-Hexachlorodibenzofuran (HxCDF)	57117-44-9	0.10	-	1.9	70 - 130	-
1,2,3,7,8,9-Hexachlorodibenzofuran (HxCDF)	72918-21-9	0.10	-	1.9	70 - 130	-
2,3,4,6,7,8-Hexachlorodibenzofuran (HxCDF)	60851-34-5	0.10	-	1.9	70 - 130	-
1,2,3,4,6,7,8-Heptachlorodibenzofuran (HpCDF)	67562-39-4	0.01	-	0.19	70 - 130	-
1,2,3,4,7,8,9-Heptachlorodibenzofuran (HpCDF)	55673-89-7	0.01	-	0.19	70 - 130	-
1,2,3,4,5,6,7,8-Octachlorodibenzofuran (OCDF)	39001-02-0	0.0003	-	0.0057	70 - 130	-
Total Tetrachlorodibenzo-p-dioxin (TCDD)	41903-57-5	-	-	-	-	-

TABLE C2-3: REQUIRED LABORATORY QUANTITATION LIMITS AND QC CRITERIA (CONTINUED)**Dioxins/Furans (EPA 8290) (Continued)**

Chemical	CAS Number	Toxicity Equivalence Factor	CHSSL (ng/kg)	Required Laboratory Quantitation Limit (ng/kg)	Laboratory Control Sample %Recovery	Surrogate %Recovery
Total Pentachlorodibenzo-p-dioxin (PeCDD)	36088-22-9	-	-	-	-	-
Total Hexachlorodibenzo-p-dioxin (HxCDD)	34465-46-8	-	-	-	-	-
Total Heptachlorodibenzo-p-dioxin (HpCDD)	37871-00-4	-	-	-	-	-
13C 2,3,7,8,-TCDF	-	-	-	-	-	40 – 135
37C 1,2,3,7,8-TCDD	-	-	-	-	-	40 - 135

Notes:

CHSSL California Human Health Screening Levels
ng/kg Nanograms per kilogram

4.3 SELECTION OF ANALYTICAL LABORATORIES

The following criteria will be considered when evaluating contract laboratories:

- Quality assurance and quality control documents governing laboratory operations
- Status of laboratory certification and the most recent laboratory audit conducted
- Initial demonstration of proficiency results for all analysts on all methods performed
- Availability of technical support regarding methods to be used
- Standard operating procedures for the desired analyses
- Method detection limits and quantitation limits for the desired analyses
- Laboratory past performance on performance evaluation samples

Additional criteria to be considered include:

- Laboratory capacity for the desired analyses
- Costs per analysis or batch of analyses
- Typical turn-around times for the type of analytical work requested
- Method development/optimization protocol

The source of analytical services to be provided will in part be determined by the project-specific intended use of the resulting data and specific requirements and constraints such as quick turnaround of data. The project-specific chain of custody will identify the laboratories that have been selected to provide analytical services.

The laboratory performing analytical analyses for samples collected from the RES area shall have current certification from the California Department of Health Services Environmental Protections Laboratory Accreditation Program to perform Hazardous Materials analysis for each method specified in this SAP.

5.0 QUALITY ASSURANCE OBJECTIVES

The intent of this SAP is to establish protocols for assuring quality data collection and criteria for determining the quality of resultant data. Data collection, reporting requirements, and analytical protocols are established to meet the needs of the SMP. The SAP emphasizes the use of proven, validated, and EPA-approved sampling methods and analytical methods such as Test Methods for Evaluating Solid Waste (SW-846) (EPA 1996). The following subsections define the specific QA and QC activities that will be applied to ensure that the environmental data collected are of the type and quality needed. In addition, Form B of the SMP is critical for the collection and use of environmental data.

5.1 DATA QUALITY OBJECTIVE PROCESS

All projects will be evaluated to determine the scope of sampling and analysis which may be required prior to initiating earthwork activities. Sampling design shall be reviewed and approved by EH&S prior to the sampling event. Soil sampling data collected from the project area will be evaluated to determine the appropriate soil management decision.

Form B is used to track project status for fulfilling the requirements for Sampling, Data Evaluation, and Soil Management steps. The Sampling Design must be approved by EH&S prior to initiating sampling. EH&S approval signature on Form B documents that the soil sampling is complete, the data has been evaluated, and the soil management decision for the project is approved. The project may proceed once EH&S approval of the soil management decision is documented.

5.2 QUALITY ASSURANCE OBJECTIVES FOR MEASUREMENT DATA

The overall QA objective is to develop and implement procedures for field sampling, chain-of-custody, laboratory analysis, and data reporting that will provide results that are usable for their intended purpose. This section addresses the level of QC effort and the specific QA objectives for sensitivity, accuracy, precision, representativeness, completeness, and comparability of data. Specific procedures for sampling, chain-of-custody, laboratory instrument calibration, laboratory analysis, reporting of data, internal QC, preventive maintenance of field equipment, and corrective action are described in other sections of this SAP. Form B will identify the numbers of samples that will be collected, and [Table C2-3](#) identified the types of field and laboratory QC samples that will be required.

Analytical data will be evaluated for compliance with QC limits ([Table C2-3](#)). Typically, when analytical data do not meet the QC limits, corrective action must be initiated or the data will be qualified or rejected. Corrective action includes stopping the analysis; examining instrument performance, sample preparation, and analysis information; recalibrating instruments; re-preparing and reanalyzing samples; and informing the appropriate project staff member of the problem.

The following subsections address the level of QC effort and objectives for sensitivity; accuracy and precision; and representativeness, completeness, and comparability of data.

5.2.1 Sensitivity

The QA objective for sensitivity is generally expressed in the form of the method quantitation limit for the analytical method selected. [Table C2-3](#) provides the concentrations of concern for contaminants known or suspected to be present at the sampling location based on risk-based criteria. The laboratory contracted for work under the SMP must be able to meet these quantitation limits. Quantitation limits reflect the influences of the sample matrix on method sensitivity and are typically higher than detection limits. Quantitation limits provide a reliable indication of the amount of material needed to produce an instrument response that can be routinely identified and reliably quantified when applying a particular analytical method to real environmental samples.

5.2.2 Precision and Accuracy

Precision and accuracy will be evaluated quantitatively by collecting the QC samples listed in [Table C2-3](#). Section 7.3 describes field QC samples in detail. The sections below describe how each of the precision, accuracy, representativeness, completeness, and comparability (PARCC) parameters will be assessed.

5.2.2.1 Precision

Precision is the degree of mutual agreement between individual measurements of the same property under similar conditions. Usually, combined field and laboratory precision is evaluated by collecting and analyzing field replicates and then calculating the variance between the samples, typically as a relative percent difference (RPD):

$$RPD = \frac{|A - B|}{(A + B)/2} \times 100\%$$

where:

- A = First duplicate concentration
- B = Second duplicate concentration

Laboratory analytical precision is evaluated by analyzing laboratory replicates or a MS and MSD. The results of the analysis of each MS/MSD and sample duplicate pairs will be used to calculate an RPD for evaluating precision. See [Table C2-3](#) for MS/MSD RPD criteria.

5.2.2.2 Accuracy

Sample spiking will be conducted to evaluate laboratory accuracy. This includes analysis of the MS and MSD samples, laboratory control samples (LCS) or blank spikes, surrogate standards, and method blanks. MS and MSD samples will be prepared and analyzed at a frequency of 5 percent. LCS or blank spikes are also analyzed at a frequency of 5 percent. Surrogate standards, where available, are added to every sample analyzed for organic constituents. The results of the spiked samples are used to calculate the percent recovery for evaluating accuracy.

$$\text{Percent Recovery} = \frac{S - C}{T} \times 100$$

where:

S	=	Measured spike sample concentration
C	=	Sample concentration
T	=	True or actual concentration of the spike

Results that fall outside the project-specific accuracy goals will be further evaluated on the basis of the results of other QC samples. See [Table C2-3](#) for spike recovery criteria.

5.2.3 Representativeness

Representativeness expresses the degree to which data accurately and precisely represents a characteristic of a population, parameter variations at a sampling point, a process condition, or an environmental condition. Representativeness is a qualitative parameter that depends on the proper design of the sampling program and proper laboratory protocol. The sampling network for each investigation will be designed to provide data that are representative of environmental conditions. During development of the SMP, consideration was given to past waste disposal practices, existing analytical data, current and former on-site physical setting and processes, and other relevant information.

Representativeness can also be affected by the time, place, and manner in which the samples are collected. The SMP identifies specific methods (i.e. grid frequency and prior investigation data) for achieving and demonstrating the representativeness of the samples to be collected.

Representativeness will also be satisfied by ensuring that this SAP and the Form B are followed, samples are collected in accordance with the appropriate DTSC guidance, proper analytical procedures are followed, and holding times of the samples are not exceeded in the laboratory.

5.2.4 Completeness

Completeness is a measure of the percentage of data that are valid. Valid data are obtained when samples are collected and analyzed in accordance with QC procedures outlined in this SAP, and when none of the QC criteria that affect data usability is exceeded. When all data validation is completed, the percent completeness value may be calculated by dividing the number of useable sample results by the total number of sample results.

Completeness will also be evaluated as part of the data quality assessment process (EPA 2006). The degree of completeness will be calculated by dividing the number of useable sample results by the total number of number of sample results. This evaluation will help determine whether there are any limitations on the decisions to be made based on the data collected. A minimum of 95% completeness per matrix type will be required for usable data.

5.2.5 Comparability

Comparability expresses the confidence with which one data set can be compared with another. Comparability of data will be achieved by consistently following standard field and laboratory procedures and by using standard measurement units in reporting analytical data.

5.3 FIELD QUALITY CONTROL SAMPLES

Field QC samples will be collected and analyzed to assess the quality of data generated from sampling activities. [Table C2-4](#) presents QC samples to be collected and analyzed for RES area projects. These samples may include trip blanks, equipment rinsate blanks, field replicates, and field split samples as described below:

- **Trip blanks** are used to assess the potential for sample contamination during handling, shipment, and storage. One trip blank is usually included within every shipping cooler of liquid samples to be analyzed for VOCs. Trip blanks are sample bottles filled by the analytical laboratory with organic-free water. The trip blanks are sealed and transported to the field; kept with empty sample bottles and then with the investigative samples throughout the field effort; and returned to the laboratory for analysis with the investigative samples. Trip blanks are never opened in the field.
- **Equipment rinsate blanks** are collected when sampling equipment is used. These blanks assess the cleanliness of sampling equipment and the effectiveness of equipment decontamination. Equipment rinsate blanks are typically collected for each type of decontaminated sampling equipment. Equipment rinsate blanks are collected by pouring analyte-free water over surfaces of cleaned sampling equipment that contact sample media. Equipment rinsate blanks are collected after sampling equipment has been decontaminated but prior to being reused for sampling.
- **Source blanks** are collected from the water used for the final decontamination rinse of equipment. They are used to assess contamination in the water used for decontamination. One source blank is collected from each source of water used for decontamination.
- **Field replicate samples** are independent samples collected as close as possible in space and time to the original investigative sample. Collection of soil replicates are decided based on the data objectives for each site. Immediately following collection of the original sample, the field duplicate sample is collected using the same collection method. Care should be taken to collect the field duplicate sample as close to the location of the original sample as possible. Field duplicate samples can measure how sampling and field procedures influence the precision of an environmental measurement. They can also provide information on the heterogeneity of a sampling location.
- **Temperature blanks** are used to assess the temperature of the samples upon arrival at the laboratory. A sample container is filled with distilled water and placed each cooler. Upon arrival at the laboratory, the temperature of the water is measured. The temperature blank is not analyzed.

- **Field split samples** are usually a set of two or more samples taken from a larger homogenized sample. Field split samples may be collected to monitor how closely laboratories are meeting project-specific QA objectives. The larger sample is usually collected from a single sampling location, but can also be a composite sample. Field split samples can be sent to two or more laboratories and are used to provide comparison data between the laboratories.

TABLE C2-4: QC SAMPLES FOR PRECISION AND ACCURACY

QC Type	QA Sample Type	Precision / Accuracy	Default Frequency
Field QC	Field Replicates	Precision	1 every 10 soil or sediment samples
	Equipment Rinsate	Accuracy	1 per day per type of non-disposable sampling equipment
	Source Water Blank	Accuracy	1 per source of decontamination water
	Trip Blanks	Accuracy	1 per shipping container containing volatile samples
	Temperature Blanks	Accuracy	1 per shipping container
Laboratory QC	Method Blanks	Accuracy	1 per every batch of samples, type of matrix, or 20 samples (whichever is more frequent)
Laboratory QC	MS/MSD Percent Recovery	Precision	1 per every 20 samples
	Laboratory Replicates (blind)	Precision	1 per every 20 samples
	LCS or Blank Spikes Percent Recovery	Accuracy	1 per every batch of samples, type of matrix, or 20 samples (whichever is more frequent)
	Surrogate Standard Percent Recovery	Accuracy	Every sample for organic analysis by gas chromatography

Source:

EPA. 2005 Uniform Federal Policy for Quality Assurance Project Plans. Part 2B, Quality Assurance/Quality Control Compendium: Minimum QA/QC Activities. EPA 505-B-04-900B.

6.0 SAMPLE CUSTODY

The sections below describe sample handling procedures, including sample identification and labeling, documentation, chain of custody, and shipping. Procedures for equipment decontamination and management of investigation derived waste are also briefly described below.

6.1 SAMPLE IDENTIFICATION

A unique sample identification number will be assigned to each sample collected during the various RES investigations. The sample numbering system allows each sample to be uniquely identified and provides a means of tracking the sample from collection through analysis.

6.2 SAMPLE LABELS

A sample label will be affixed to all sample containers. The label will be completed with the following information, written in indelible ink:

- Project name and location
- Sample identification number
- Date and time of sample collection
- Preservative used
- Sample collector's initials
- Analysis required

After it is labeled, each sample will be refrigerated or placed in a cooler that contains wet ice to maintain the sample temperature at or below $4 \pm 2^{\circ}\text{C}$.

6.3 SAMPLE DOCUMENTATION

Documentation during sampling is essential to ensure proper sample identification. Sampling personnel will adhere to the following general guidelines for maintaining field documentation:

- Documentation will be completed in permanent black ink.
- All entries will be legible.
- Errors will be corrected by crossing out with a single line and then dating and initialing the lineout.
- Unused portions of pages will be crossed out, and each page will be signed and dated.

The field team leader is responsible for ensuring that sampling activities are properly documented.

6.4 CHAIN OF CUSTODY

Standard sample custody procedures will be conducted to maintain and document sample integrity during collection, transportation, storage, and analysis. A sample will be considered to be in custody if one of the following statements applies:

- It is in a person's physical possession or view.
- It is in a secure area with restricted access.
- It is placed in a container and secured with an official seal such that the sample cannot be reached without breaking the seal.

Chain-of-custody procedures provide an accurate written record that traces the possession of individual samples from the time of collection in the field to the time of acceptance at the laboratory. The chain-of-custody record also will be used to document all samples collected and the analysis requested. Information that the field personnel will record on the chain-of-custody record includes:

- Project name and number
- Sampling location
- Name and signature of sampler
- Destination of samples (laboratory name)
- Sample identification number
- Date and time of collection
- Number and type of containers filled
- Analyses requested
- Preservatives used (if applicable)
- Filtering (if applicable)
- Sample designation (i.e. grab or composite)
- Sample media
- Signatures of individuals involved in custody transfer, including the date and time of transfer
- Air bill number (if applicable)
- Project contact and phone number

Unused lines on the chain-of-custody record will be crossed out. Field personnel will sign chain-of-custody records that are initiated in the field, and the air bill number will be recorded. The record will be placed in a waterproof plastic bag and taped to the inside of the shipping container used to transport the samples. Signed air bills will serve as evidence of custody transfer between field personnel and the courier, and between the courier and the laboratory. Copies of the chain-of-custody record and the air bill will be retained and filed by field personnel before the containers are shipped.

Laboratory chain of custody begins when samples are received and ends when samples are discarded. Laboratories analyzing samples must follow custody procedures at least as stringent as are required by the EPA Contract Laboratory Program statements of work (EPA 2003, 2004). The laboratory should designate a specific individual as the sample custodian. The custodian will receive all incoming samples, sign the accompanying custody forms, and retain copies of the forms as permanent records. The laboratory sample custodian will record all pertinent information concerning the samples, including the persons who delivered the samples, the date and time they were received, condition of the sample at the time it was received (sealed, unsealed, or broken container; temperature; or other relevant remarks), the sample identification numbers, and any unique laboratory identification numbers for the samples. When the sample transfer process is complete, the custodian is responsible for maintaining internal logbooks, tracking reports, and other records necessary to maintain custody throughout sample preparation and analysis.

The laboratory will provide a secure storage area for all samples. Access to this area will be restricted to authorized personnel. The custodian will ensure that samples that require special handling, including samples that are heat- or light-sensitive, radioactive, or have other unusual physical characteristics, will be properly stored and maintained prior to analysis.

6.5 SAMPLE SHIPMENT

The following procedures will be implemented when collected samples are shipped:

- The chain-of-custody records will be placed inside a plastic bag. The bag will be sealed and taped to the inside of the shipping container. The air bill, if required, will be filled out before the samples are handed over to the carrier. The laboratory will be notified if the sampler suspects that the sample contains any substance that would require laboratory personnel to take safety precautions.
- The shipping container will be closed and taped shut with strapping tape around both ends. If the shipping container has a drain, it will be taped shut both inside and outside of the shipping container.
- Signed and dated custody seals will be placed on the front and side of each shipping container. Wide clear tape will be placed over the seals to prevent accidental breakage.
- The chain-of-custody record will be transported within the taped sealed shipping container. When the shipping container is received at the analytical laboratory, laboratory personnel will open the shipping container and sign the chain-of-custody record to document transfer of samples.

Multiple shipping containers may be sent in one shipment to the laboratory. The outside of the shipping container will be marked to indicate the number of shipping containers in the shipment.

6.6 DECONTAMINATION PROCEDURES

All reusable equipment will be decontaminated according to the following procedures. All reusable sampling tools will be decontaminated before sampling begins and between sample locations. Reusable sampling tools will be decontaminated by scrubbing in a solution of potable water and nonphosphate detergent (Alconox or Liquinox). The tools will then be double-rinsed with distilled water. Sampling tools that are not used immediately after decontamination will be allowed to air dry and wrapped in plastic.

6.7 MANAGEMENT OF IDW

All soils and debris generated from soil borings and well installations, and water from well purging and decontamination will be contained as investigation-derived waste (IDW). The soil or water will be placed in 55-gallon drums, labeled, and stored on a concrete containment pad in a fenced or secured location at the BGC. Samples will be collected from the drums for characterization of the waste. The results of the sample will dictate the exact disposal requirements. The drums will then be shipped off site to the appropriate facility.

Personal protective equipment and miscellaneous waste from sampling (paper towels, aluminum foil, and plastic sheeting) will be placed in large garbage bags, sealed, and disposed of in facility trash receptacles as solid waste, or disposed of at a proper off-site facility to prevent exposure to unauthorized personnel, as appropriate.

7.0 DATA REDUCTION, VALIDATION, AND REPORTING

The following section describes the methods used for verifying and validating data.

7.1 FIELD DATA VERIFICATION

Project team personnel will verify field data through reviews of data sets to identify inconsistencies or anomalous values. Any inconsistencies discovered will be resolved as soon as possible by seeking clarification from field personnel responsible for data collection. All field personnel will be responsible for following the sampling and documentation procedures described in this SAP so that defensible and justifiable data are obtained.

Data values that are significantly different from the population are called “outliers.” A systematic effort will be made to identify any outliers or errors before field personnel report the data. Outliers can result from improper sampling or measurement methodology, data transcription errors, calculation errors, or natural causes. Outliers that result from errors found during data verification will be identified and corrected; outliers that cannot be attributed to errors in sampling, measurement, transcription, or calculation will be clearly identified in project reports.

7.2 LABORATORY DATA VERIFICATION

Laboratory personnel will verify analytical data at the time of analysis and reporting and through subsequent reviews of the raw data for any nonconformances to the requirements of the analytical method. Laboratory personnel will make a systematic effort to identify any outliers or errors before they report the data. Outliers that result from errors found during data verification will be identified and corrected.

7.3 LABORATORY DATA VALIDATION

Data validation is a systematic process for reviewing and qualifying data against a set of criteria to determine whether they are adequate for their intended use. Reviewing and evaluating all analytical data for their PARCC parameters verifies adequacy. EH&S will indicate the level of validation required for the data. Criteria for data qualification during the cursory and full review are derived from EPA guidelines (EPA 2008, 2010), the SAP, SMP, sampling planning document, and associated analytical methods. General requirements for cursory and full validation are listed below.

7.3.1 Cursory Data Validation

Cursory review of the analytical reports includes evaluating the following parameters, as applicable: holding times, initial and continuing calibrations, laboratory and field blanks, accuracy, laboratory precision, and analytical and matrix performance. An overall assessment of the data will also be conducted. Cursory data validation is the default review for SMP-related project sampling.

7.3.2 Full Data Validation

Full review includes all the elements of a cursory review as presented above, and the following additional items, as applicable:

- Method compliance, instrument performance check samples, cleanup performance, system performance check samples, system performance, inductively coupled plasma or atomic emission spectroscopy interference check samples, and overall assessment of the data
- Target analyte identification
- Analyte quantitation
- Detection and quantitation limit verification

Full data validation may be selected on a project-by-project basis, if determined to be necessary by UC EH&S staff.

8.0 DATA ASSESSMENT PROCEDURES

After environmental data have been reviewed, verified, and validated, the data must be further evaluated to determine whether data objectives have been met. This section describes these procedures.

UC will systematically assess data quality and data usability. This assessment will include the following elements:

- A review of the sampling design and sampling methods to verify that these were implemented as planned and are adequate to support project objectives.
- A review of project-specific data quality indicators for PARCC parameters and quantitation limits to determine if acceptance criteria have been met.
- A review of project-specific objectives to evaluate whether they have been achieved by the data collected.
- An evaluation of any limitations associated with the decisions to be made based on the data collected. For example, if data completeness is only 90 percent compared with a project-specific completeness objective of 95 percent, the data may still be usable to support a decision, but at a lower level of confidence.

Deviations from the Sampling Design (Form B), such as change in sample location, or analytical results which do not meet data quality criteria, will be evaluated to determine whether additional sampling is required. Once the data set is deemed acceptable per project sampling design, the soil sample results will be compared to the SMP Category I and Category II criteria to determine if a soil management action is required.

9.0 REFERENCES

- California Regional Water Quality Control Board. 2016. "Environmental Screening Levels, San Francisco Bay Regional Water Quality Control Board." February. Available on-line at: http://www.waterboards.ca.gov/sanfranciscobay/water_issues/programs/ESL/ESL%20Workbook_ESLs_Interim%20Final_22Feb16_Rev3_PDF.pdf
- Tetra Tech EM Inc. (Tetra Tech). 2010. "Field Sampling Workplan, Appendix A, Quality Assurance Project Plan, Richmond Field Station, Richmond, California." June 2.
- Tetra Tech. 2013. "Site Characterization Report, University of California, Berkeley, Richmond Field Station, Richmond, California."
- URS Corporation. 2000. "Field Sampling and Analysis Results, University of California Berkeley, Richmond Field Station/Stege Marsh." December.
- U.S. Environmental Protection Agency (EPA). 1996. "Test Methods for Evaluating Solid Waste, 3rd Edition." SW-846. Promulgated revisions.
- EPA. 2003. "USEPA Contract Laboratory Program Statement of Work for Organic Analysis." Document Number OLM04.3. March.
- EPA. 2004. "USEPA Contract Laboratory Program National Functional Guidelines for Inorganic Data Review." Document Number EPA-540/R-04-004. October.
- EPA. 2005. Uniform Federal Policy for Quality Assurance Project Plans. Part 2B, Quality Assurance/Quality Control Compendium: Minimum QA/QC Activities. EPA 505-B-04-900B.
- EPA. 2006. "Systematic Planning: A Case Study for Hazardous Waste Site Investigations. (EPA QA/CS-1)". Document Number EPA/240/B-06/004. February.
- EPA. 2008. "Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review" EPA-540-R-08-01. June.
- EPA. 2010. "Contract Laboratory Program National Functional Guidelines for Inorganic Superfund Data Review" EPA-540-R-10-011. January.

ATTACHMENT C1
DTSC COMMENTS AND RESPONSE TO COMMENTS



Matthew Rodriguez
Secretary for
Environmental Protection



Department of Toxic Substances Control

Barbara A. Lee, Director
700 Heinz Avenue
Berkeley, California 94710-2721



Edmund G. Brown Jr.
Governor

April 5, 2017

Mr. Greg Haet
EH&S Associate Director, Environmental Protection
Office of Environment, Health & Safety
University of California, Berkeley
University Hall, 3rd Floor, #1150
Berkeley, California 94720

Dear Mr. Haet:


The Department of Toxic Substances Control (DTSC) received the *Response to Comments* and revised *Soil Management Plan, Revision 1, Removal Action Workplan, Attachment C* (SMP), dated March 2017 and additional revisions submitted on March 20, 2017 for the University of California, Berkeley Richmond Field Station Site (also known as the Berkeley Global Campus at Richmond Bay). The documents were prepared by Tetra Tech, Inc. on behalf of the University of California, Berkeley. The SMP supports the approved July 2014 Removal Action Workplan by providing guidance to soil disturbing activities during future construction, redevelopment or maintenance projects. The original SMP is being revised to reflect new technical updates and to provide clarification. The March 2017 SMP was submitted in response to DTSC's December 14, 2016 comment letter. Based upon our review, the responses adequately address DTSC's comments and are reflected in the revised document; therefore, the SMP is approved. Please provide a final paper and electronic copy of the document within 30 days of the date of this letter.

If you have any questions, please contact Lynn Nakashima at (510) 540-3839 or lynn.nakashima@dtsc.ca.gov.

Sincerely,

Lynn Nakashima, Project Manager
Senior Hazardous Substances Scientist
Brownfields and Environmental
Restoration Program
Berkeley Office - Cleanup Operations

Gerard F. Aarons, PG, CHG
Engineering Geologist
Brownfields and Environmental
Restoration Program
Geological Services Branch



Mr. Greg Haet
April 5, 2017
Page 2

cc: Karl Hans
University of California, Berkeley
Environmental Health & Safety
317 University Hall, No 1150
Berkeley, California 94720

Jason Brodersen
Tetra Tech, Inc.
1999 Harrison Street, Suite 500
Oakland, CA 94612



Matthew Rodriguez
Secretary for
Environmental Protection



Department of Toxic Substances Control

Barbara A. Lee, Director
700 Heinz Avenue
Berkeley, California 94710-2721



Edmund G. Brown Jr.
Governor

December 14, 2016

Mr. Greg Haet
EH&S Associate Director, Environmental Protection
Office of Environment, Health & Safety
University of California, Berkeley
University Hall, 3rd Floor, #1150
Berkeley, California 94720

Dear Mr. Haet:

The Department of Toxic Substances Control (DTSC) received the Draft *Soil Management Plan, Revision 1, Removal Action Workplan, Attachment C* (revised SMP) for the Berkeley Global Campus at Richmond Bay (formerly known as the Richmond Field Station), located in Richmond, California. The revised SMP, dated September 27, 2016, was prepared by Tetra Tech, Inc. on behalf of the University of California, Berkeley. The SMP supports the approved July 2014 Removal Action Workplan by providing guidance to soil disturbing activities during future construction, redevelopment or maintenance projects. The original SMP is being revised to reflect new technical updates and to provide clarification. DTSC has reviewed the revised SMP and has the following comments:

1. The revised SMP includes commercial environmental screening levels (ESLs) for TPH constituents using 2013 San Francisco Bay Regional Water Quality Control Board (SFRWQCB) values. The SFRWQCB updated its ESLs in February 2016; therefore, the 2016 values should be used. This includes Sections 2.3, 4.2.1, Table C-1, and Exhibit C-2 Table C2-3.
2. Page C-17, TPH – Clarify whether the soil excavation near Building 484 has been completed or whether additional work needs to be done.
3. Page C-20, Section 3.1, Types of Work, first bullet item: Revise this bullet item to include that installation and decommissioning of soil boreholes and monitoring wells would be considered a *de minimis* project, but all appropriate permits (i.e., from Contra Costa County Environmental Health Department) would be obtained and work plans approved prior to the start of work.


4. Page C-35, Confirmation Sampling: Include that the confirmation sampling frequency may be increased depending on the results of the initial or subsequent confirmation sampling results or based on visual observation.
5. Figure C-6, Historic Radiological Use and Sampling Locations: Revise the legend item that indicates that a full list of report references is included on the back of the figure, or include the references.
6. Table C-1: Category I and II Criteria: Revise the Category II On-Site Management criteria for barium from 100,000 to 21,100.
7. Add a subsection to Section 3 Types of Work titled: "*Dewatering Related to Construction Work*". In this subsection, include a requirement that states "In areas with known impacts to groundwater, the following is required:
 - a) perform an assessment of current groundwater monitoring reports to determine if there are impacts to groundwater in the work area, prior to installing dewatering wells;
 - b) prevent advancing any borings for dewatering purposes (or installing dewatering wells) which are screened across multiple water-bearing units;
 - c) secure all appropriate permits to discharge to sanitary sewer if dewatering is done in areas where impacts to groundwater are known;
 - d) enforce all groundwater discharge permit requirements including collecting/storing impacted groundwater, batch sampling it, and/or treating it prior to discharge to the sanitary sewer; or,
 - e) haul impacted groundwater off-site for proper disposal.

If you have any questions, please contact Lynn Nakashima at lynn.nakashima@dtsc.ca.gov or (510) 540-3839.

Sincerely,



Lynn Nakashima, Project Manager
Senior Hazardous Substances Scientist
Brownfields and Environmental
Restoration Program
Berkeley Office - Cleanup Operations



PG, CEG, CHG

Gerard F. Aarons, PG, CHG
Engineering Geologist
Brownfields and Environmental
Restoration Program
Geological Services Branch

Mr. Greg Haet
December 14, 2016
Page 3

cc: Karl Hans
University of California, Berkeley
Environmental Health & Safety
317 University Hall, No 1150
Berkeley, California 94720

Jason Brodersen
Tetra Tech, Inc.
1999 Harrison Street, Suite 500
Oakland, CA 94612

Draft Soil Management Plan, Revision 1, Removal Action Workplan, Attachment C
University of California, Richmond Field Station Site
September 27, 2016

Response to Comments
Department of Toxic Substances Control

UC Berkeley Ref. No.	Page, Section, Item	DTSC Comment No.	DTSC Comment	UC Berkeley Response
1	Sections 2.3, 4.2.1, Table C-1, Exhibit C-2 Table C2-3	1	The revised SMP includes commercial environmental screening levels (ESLs) for TPH constituents using 2013 San Francisco Bay Regional Water Quality Control Board (SFRWQCB) values. The SFRWQCB updated its ESLs in February 2016; therefore, the 2016 values should be used. This includes Sections 2.3, 4.2.1, Table C-1, and Exhibit C-2 Table C2-3.	Text and tables have been updated to include the updated February 2016 SFRWQCB values. The more stringent of the Direct Exposure Human Health Risk Levels for Commercial/Industrial Shallow Soil Exposure or Construction Worker (Table S-1), or Leaching to Groundwater Nondrinking Water (Table S-2) were selected as the Criteria I and II screening levels. Table C-1, Exhibit C-2 Table C2-3, and Section 4.2.1 Screening Criteria were updated with new values. Section 2.3 identifies the screening values applied within the 2013 Site Characterization Report, and therefore was not changed.
2	Page C-17	2	TPH - Clarify whether the soil excavation near Building 484 has been completed or whether additional work needs to be done.	Section 2.3 Chemicals of Concern, TPH, has been revised to indicate that the soil excavation near Building 484 was completed in October 2014. Section 7.0 References has been updated to include the summary letter.
3	Page C-20, Section 3.1, Types of Work, first bullet item	3	Revise this bullet item to include that installation and decommissioning of soil boreholes and monitoring wells would be considered a <i>de minimis</i> project, but all appropriate permits (i.e., from Contra Costa County Environmental Health Department) would be obtained and work plans approved prior to the start of work.	The final bullet in Section 3.1 has been revised to state the decommissioning of soil boreholes and monitoring wells are considered <i>de minimis</i> projects; the installation of these items was already included in the bullet. The paragraph below the final bullet has been revised to indicate that all appropriate permits would be obtained and work plans approved prior to the start of work.
4	Page C-35, Confirmation Sampling	4	Include that the confirmation sampling frequency may be increased depending on the results of the initial or subsequent confirmation sampling results or based on visual observation.	Section 5.2.2 Confirmation Sampling has been revised to clarify that confirmation sampling frequency may be increased based on the results of the initial or subsequent confirmation sampling results, or visual observations.

Draft Soil Management Plan, Revision 1, Removal Action Workplan, Attachment C
University of California, Richmond Field Station Site
September 27, 2016

Response to Comments
Department of Toxic Substances Control

UC Berkeley Ref. No.	Page, Section, Item	DTSC Comment No.	DTSC Comment	UC Berkeley Response
5	Figure C-6, Historic Radiological Use and Sampling Locations:	5	Revise the legend item that indicates that a full list of report references is included on the back of the figure, or include the references.	Figure C-6 legend has been revised to include a note stating that all radiological reference documents are included in Section 7.0, References. The reference key within Figure C-6 has been updated to include the appropriate references. Section 7.0 References has been updated accordingly.
6	Table C-1: Category I and II Criteria:	6	Revise the Category II On-Site Management criteria for barium from 100,000 to 21,100.	Table C-1 has been revised to indicate the Category II criteria for barium as 21,100 milligrams per kilogram. Section 4.2.1 Screening Criteria was updated to reflect this update.
7	Section 3	7	<p>Add a subsection to Section 3, Types of Work titled: "Dewatering Related to Construction Work". In this subsection, include a requirement that states "In areas with known impacts to groundwater, the following is required:</p> <ul style="list-style-type: none"> a) perform an assessment of current groundwater monitoring reports to determine if there are impacts to groundwater in the work area, prior to installing dewatering wells; b) prevent advancing any borings for dewatering purposes (or installing dewatering wells) which are screened across multiple water-bearing units; c) secure all appropriate permits to discharge to sanitary sewer if dewatering is done in areas where impacts to groundwater are known; d) enforce all groundwater discharge permit requirements including collecting/storing impacted groundwater, batch sampling it, and/or treating it prior to discharge to the sanitary sewer; or e) haul impacted groundwater off-site for proper disposal. 	Section 3 has been updated to include the recommended items a through e noted in DTSC Comment 7.

ATTACHMENT C2
IMPORTED SOILS SAMPLING AND ANALYSIS REQUIREMENTS TO ASSESS
CONTAMINANT CONCENTRATIONS

University of California, Berkeley Global Campus at Richmond Bay
Imported Soils
Sampling and Analysis Requirements to Assess Contaminant Concentrations

Introduction

UC Berkeley's Richmond Field Station (RFS) Site portion of the Berkeley Global Campus at Richmond Bay (BGC) is subject to site investigation and cleanup under the State of California Department of Toxic Substances Control (DTSC) Order Docket No. IS/E-RAO 06/07-004 (September 15, 2006). Due to the DTSC order, all fill materials to be imported for use at the RFS must be selected and tested with approval by the UC Berkeley Office of Environment, Health & Safety (EH&S), DTSC, and potentially other regulatory agencies (for example the Regional Water Quality Control Board and the Army Corps of Engineers). All soils brought to the RFS for use as fill or for temporary storage must be sampled to demonstrate that the soils are clean. This guideline presents procedures that must be followed and criteria met to obtain University and agency approval for contaminant concentrations to insure that ecological and human receptors are not exposed to harmful levels of pollution or that site investigations and remediation activities completed to date are not adversely affected by import of contaminated media (soil, water, pavement, etc.).

Regulatory Guidance

- 1) DTSC Information Advisory, Clean Imported Fill Material, October 2001
- 2) DTSC Interim Guidance, Evaluation of School Sites with Potential Soil Contamination as a Result of Lead From Lead-Based Paint, Organochlorine Pesticides from Termiticides, and Polychlorinated Biphenyls from Electrical Transformers, June 9, 2006
- 3) Other- marsh fill and other open space areas may require compliance with US Army Corps of Engineers Dredging and Dredged Material Management Guidelines and/or the San Francisco Bay Regional Water Quality Control Board's SF Bay Plan.

Procedures

Borrow Area Assessment- In order to minimize the potential for introducing contaminated fill onto a site, it is necessary to verify through documentation that the fill source is appropriate for use at the RFS. Documentation required to be provided to the University should include detailed information on the previous land use from where the fill is taken. Proper documentation should include detailed information regarding the former land use, previous environmental site assessments, and the results of any testing performed.

In addition to source assessment documentation, the University requires that soils be sampled at a minimum frequency required in the DTSC Regulatory Guidance for imported fill material and analyzed for target compounds according to this guidance. Additional analyses may be required depending on the borrow source site history (for example, soils from LBNL must be analyzed for tritium). Soil imported for use in surface water or marsh restoration projects may also require review and approval by the San Francisco Bay Regional Water Quality Control Board, the US Army Corps of Engineers, and other agencies.

Sampling Method

Incremental sampling collection methods following the ITRC Incremental Sampling Methodology are highly preferred by UC Berkeley to discrete samples. Discrete samples will only be accepted based on a thorough documentation of borrow area history and soil pile appearance (high heterogeneous soils may be rejected if not adequately assessed for soil contaminant variability).

Material Sampling Schedule

Area of Individual Borrow Area	Sampling Requirement
2 acres or less	4 samples minimum
2 to 4 acres	1 sample every ½ acre minimum
4 to 10 acres	8 samples minimum
Greater than 10 acres	Minimum of 8 locations with 4 subsamples per location
Volume of Borrow Area Stockpile	Samples per Volume
Up to 1,000 cubic yards	1 sample per 250 cubic yards
1,000 to 5,000 cubic yards	4 samples for first 1,000 cubic yards+ 1 additional sample per each additional 500 cubic yards
Greater than 5,000 cubic yards	12 samples for first 5, 000 cubic yards + 1 sample per each additional 1,000 cubic yards

Laboratory Analyses

All soil sampled should be analyzed by a state certified analytical laboratory for the following target compounds using the required test methods.

Analyte	Method
Heavy metals	EPA methods 6010B and 7471A
Petroleum	TPH modified EPA method 8015
PCBs	EPA method 8082
Polyaromatic Hydrocarbons (PAHs)	EPA method 8270C SIM Method
Organochlorine Pesticides	EPA method 8081A
Volatile Organic Compounds	EPA method 8260

In addition, if soil is being collected from an area known to contain natural serpentine soils it must be analyzed for asbestos by polarized light microscopy. Other analyses may be required depending on the site environmental history and planned use for the soil (for example, radioactive materials, plant pathogens [such as Sudden Oak Death], etc.).

University Approval Process

The following required documentation must be provided to the campus Office of Environment, Health & Safety at least two weeks prior to proposed import for review.

1. Borrow source site history.
2. Soil sampling plan (note, it is preferred that proposed sampling plans be submitted to EH&S for review and approval prior to sampling)
3. Certified Laboratory Analytical Results

Note- if sampling plans appear to be inadequate or improper or insufficient laboratory analyses have been performed, the University may require additional laboratory analyses.

RFS Criteria Imported Soil (effective June 2016)

The following chemical criteria apply to RFS soil imported for use as clean fill material:

Arsenic: site specific concentration of 16 mg/kg

Radioactive materials: Indistinguishable from background

All other chemicals: the Soils Management Plan (July 18, 2014 and any most recent SMP updates) will be used to compare to Category I and Category II acceptance criteria (SMP Table C1) for all Research, Education, and Support designated areas of the BGC (as described in SMP Section 4.2.2 Determination of Soil Management Action). Natural Open Space soil criteria will be based on these SMP categories as well as ecological soil screening levels for plants, invertebrates, birds, and mammals using the EPA's Ecological Soil Screening Levels (Eco-SSL) or the Oak Ridge National Laboratory (ORNL) phytotoxicity and earthworm toxicity benchmarks.

Note that site use may also require specific testing of sources for geotechnical, plant pathogens, and soil nutrients requirements of specific projects.